


**Power Inductors** AWP252010AF-Series

**1. Features**

1. This specification applies Low Profile Power Inductors.
2. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
3. Operating Temperature:-40~+105°C (Including self-temperature rise)




**2. Dimensions**

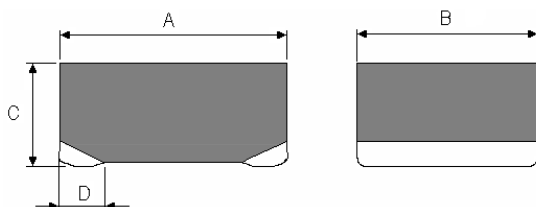

Size	A(mm)	B(mm)	C(mm)	D(mm)
252010	2.5±0.2	2.0±0.2	1.0 max.	0.5±0.3

**3. Part Numbering**








A: Series  
 B: Dimension  
 C: Material  
 D: Inductance                      R47=0.47uH  
 E: Inductance Tolerance            M=±20%

**4. Specification**

TAI-TECH Part Number	Inductance (uH)	Test Frequency (Hz)	DCR (Ω)		I sat (A)		I rms (A)	
			max.	typ.	max.	typ.	max.	typ.
AWP252010AF-R47M	0.47±20%	1V/1M	0.048	0.040	4.00	4.50	3.20	3.60
AWP252010AF-R68M	0.68±20%	1V/1M	0.070	0.058	3.70	4.00	2.90	3.20
AWP252010AF-1R0M	1.00±20%	1V/1M	0.079	0.066	2.70	3.00	2.50	2.70
AWP252010AF-2R2M	2.20±20%	1V/1M	0.168	0.140	1.90	2.10	1.50	1.80
AWP252010AF-4R7M	4.70±20%	1V/1M	0.324	0.270	1.30	1.50	1.10	1.30

Note:  
 Isat : Based on inductance change (ΔL/L0 : ≤-30%) @ ambient temp. 25°C  
 Irms : Based on temperature rise (ΔT : 40°C.) Max

### 5. Typical Performance Curves

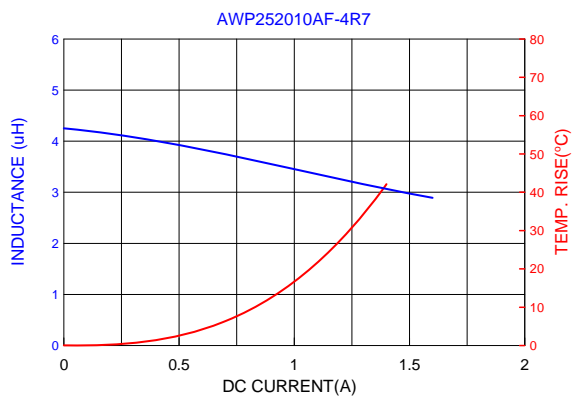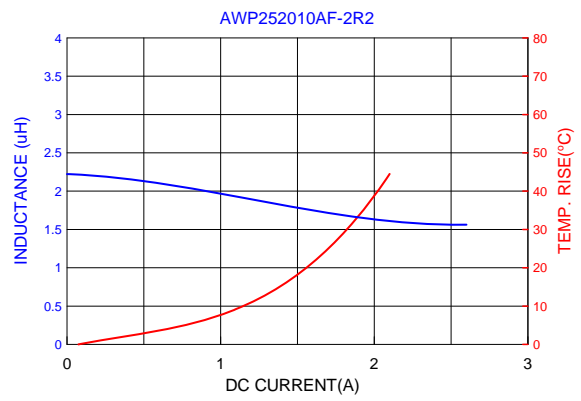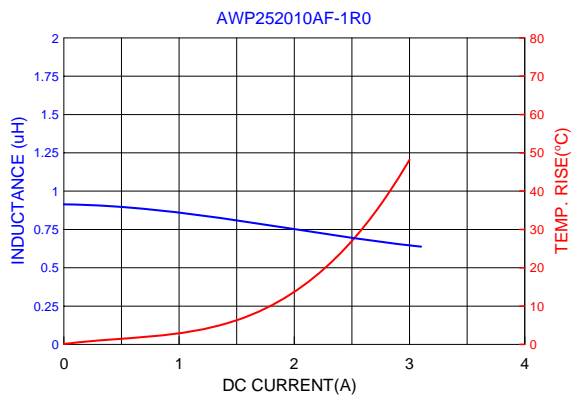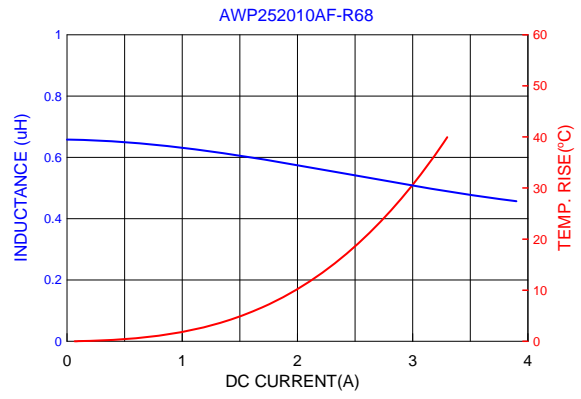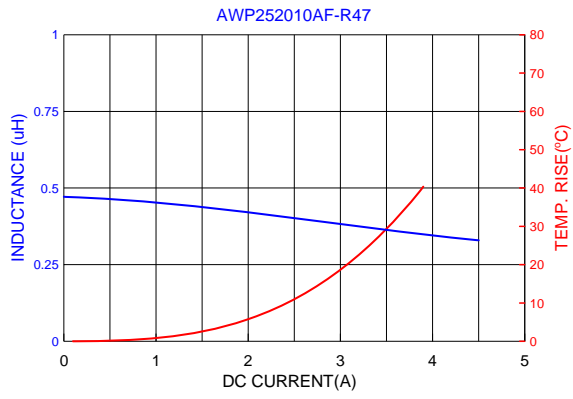

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)