

**Telecoil-antennas Inductors**

**PAS4420F-SERIES**

**1. Features**


1. Hearing Aid Compatibility-/Telecoil-antennas;
2. PAS4420F-series realizes small size and low profile. 4.4x2.0x2.0 mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
4. Meets the T3 FCC requirements(HAC-Act) acc. ANSI C63.19
5. Operating temperature-40~+125°C (Including self - temperature rise)



**2. Applications**

1. T-coil/HAC-coil for hearing and aid compatible cell phones .
2. Decoupling in RF and IF-circuit .
3. Transponder antenna .


**3. Dimensions**

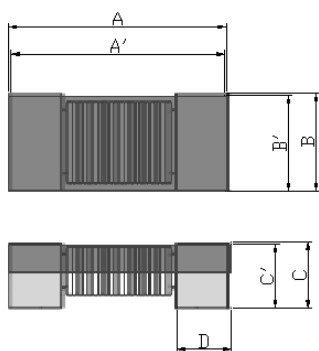

Size	A(mm)	A'(mm)	B(mm)	B'(mm)	C(mm)	C'(mm)	D(mm)
PAS4420F	4.75±0.2	4.4±0.2	2.25±0.2	2.0±0.2	1.80±0.3	1.80±0.2	0.8 ref.


Units : mm

**Recommend PC Board Pattern**



L(mm)	G(mm)	H(mm)
4.8	3.2	2.3

**4. Part Numbering**



- A: Series
- B: Dimension L x H
- C: Lead Free Code
- D: Inductance 252=2500 uH
- E: Inductance Tolerance K=±10% M=±20%
- F: Test Frequency 10 KHZ

**5. Specification**

Part Number	Inductance (uH) ±10%	f <sub>L0</sub> (kHz)	SRF MHz(min)	RDC (Ω)	Rated current (mA) max.
PAS4420F-252M-F10	2500	10	1	82±10%	40
PAS4420F-352K-F10	3500	10	1	85Max	20

Note:

1. Test frequency : Inductor(L) : 10KHz /0.1V;
2. All test data referenced to 25°C ambient.
3. Testing Instrument : L/Q: Agilent-4192A, Agilent-16334A ; Irms:CH3302,CH1320 ; SRF: Agilent-4291B ; Rdc: Agilent-34420A
4. Rated Current (Irms) will cause the coil temperature rise approximately Δt of 20°C .

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)

[>>点击查看相关商品](#)