

# High Frequency Winding Type Chip Inductor


SWI1008UF-SERIES

## 1. Features

1. Ceramic core wire wound construction.
2. No batch to batch variations in inductance
3. High Reliability due to ceramic wire wound construction.
4. High frequency application.
5. Small footprint as well as low profile.
6. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
7. Operating temperature  $-40\sim+125^{\circ}\text{C}$  (Including self - temperature rise)



## 2. Dimensions

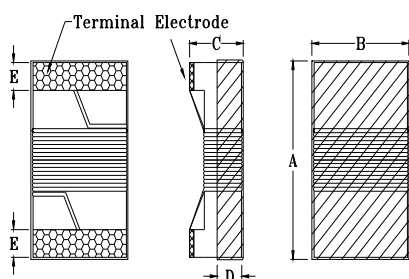

Size	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
SWI1008	2.92 max.	2.79 max.	2.20 max.	1.20 ref.	0.55±0.1

Unit:mm

## 3. Part Numbering

<b>SWI</b>	<b>1008</b>	<b>U</b>	<b>F</b>	-	<b>10N</b>	<b>J</b>
A	B	C	D		E	F

A: Series

B: Dimension

LxW

C: Material

D: Lead Free Code

E: Inductance

10N=10nH



F: Inductance Tolerance

G=±2%, J=±5%, K=±10%

## 4. Specification

Part Number	Inductance (nH)	Tolerance	Test Frequency (Hz)	Q min.	Test Frequency (MHz)	Rated Current (mA) max.	DCR ( $\Omega$ ) max.	SRF (MHz) min.
SWI1008UF-10N□	10	G, J, K	0.1V/50M	50	500	1000	0.08	4100
SWI1008UF-12N□	12	G, J, K	0.1V/50M	50	500	1000	0.09	3300
SWI1008UF-15N□	15	G, J, K	0.1V/50M	50	500	1000	0.18	2500
SWI1008UF-18N□	18	G, J, K	0.1V/50M	50	350	1000	0.11	2500
SWI1008UF-22N□	22	G, J, K	0.1V/50M	55	350	1000	0.12	2400
SWI1008UF-27N□	27	G, J, K	0.1V/50M	55	350	1000	0.13	1600
SWI1008UF-33N□	33	G, J, K	0.1V/50M	60	350	1000	0.14	1600
SWI1008UF-39N□	39	G, J, K	0.1V/50M	60	350	1000	0.15	1500
SWI1008UF-47N□	47	G, J, K	0.1V/50M	65	350	1000	0.16	1500
SWI1008UF-56N□	56	G, J, K	0.1V/50M	65	350	1000	0.18	1300
SWI1008UF-68N□	68	G, J, K	0.1V/50M	65	350	1000	0.20	1300
SWI1008UF-82N□	82	G, J, K	0.1V/50M	60	350	1000	0.22	1000
SWI1008UF-R10□	100	G, J, K	0.1V/25M	60	350	650	0.56	1000
SWI1008UF-R12□	120	G, J, K	0.1V/25M	60	350	650	0.63	950

Part Number	Inductance (nH)	Tolerance	Test Frequency (Hz)	Q min.	Test Frequency (MHz)	Rated Current (mA) max.	DCR ( $\Omega$ ) max.	SRF (MHz) min.
SWI1008UF-R15	150	G, J,K	0.1V/25M	45	100	580	0.70	850
SWI1008UF-R18	180	G, J,K	0.1V/25M	45	100	620	0.77	750
SWI1008UF-R22	220	G, J,K	0.1V/25M	45	100	500	0.84	700
SWI1008UF-R27	270	G, J,K	0.1V/25M	45	100	500	0.91	600
SWI1008UF-R33	330	G, J,K	0.1V/25M	45	100	450	1.05	570
SWI1008UF-R39	390	G, J,K	0.1V/25M	45	100	470	1.12	500
SWI1008UF-R47	470	G, J,K	0.1V/25M	45	100	470	1.19	450
SWI1008UF-R56	560	G, J,K	0.1V/25M	45	100	400	1.33	415
SWI1008UF-R62	620	G, J,K	0.1V/25M	45	100	300	1.40	375
SWI1008UF-R68	680	G, J,K	0.1V/25M	45	100	400	1.47	375
SWI1008UF-R75	750	G, J,K	0.1V/25M	45	100	360	1.54	360
SWI1008UF-R82	820	G, J,K	0.1V/25M	45	100	400	1.61	350
SWI1008UF-R91	910	G, J,K	0.1V/25M	35	50	380	1.68	320
SWI1008UF-1R0	1000	G, J,K	0.1V/25M	35	50	370	1.75	290
SWI1008UF-1R2	1200	G, J,K	0.1V/7.9M	35	50	310	2.00	250
SWI1008UF-1R5	1500	G, J,K	0.1V/7.9M	28	50	330	2.23	200
SWI1008UF-1R8	1800	G, J,K	0.1V/7.9M	28	50	300	2.60	160
SWI1008UF-2R2	2200	G, J,K	0.1V/7.9M	28	50	280	2.80	160
SWI1008UF-2R7	2700	G, J,K	0.1V/7.9M	22	25	290	3.20	140
SWI1008UF-3R3	3300	G, J,K	0.1V/7.9M	22	25	290	3.40	110
SWI1008UF-3R9	3900	G, J,K	0.1V/7.9M	20	25	260	3.60	100
SWI1008UF-4R7	4700	G, J,K	0.1V/7.9M	18	7.9	200	4.00	32
SWI1008UF-5R6	5600	G, J,K	0.1V/7.9M	18	7.9	200	4.00	25
SWI1008UF-6R8	6800	G, J,K	0.1V/7.9M	18	7.9	200	4.90	21
SWI1008UF-8R2	8200	G, J,K	0.1V/7.9M	16	7.9	170	6.00	16
SWI1008UF-100	10000	G, J,K	0.1V/2.52M	15	7.9	170	8.00	14

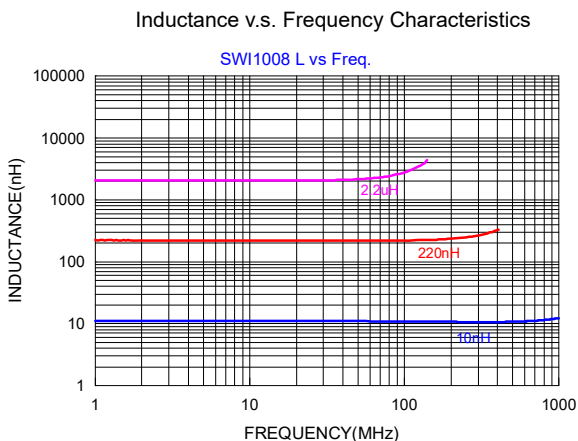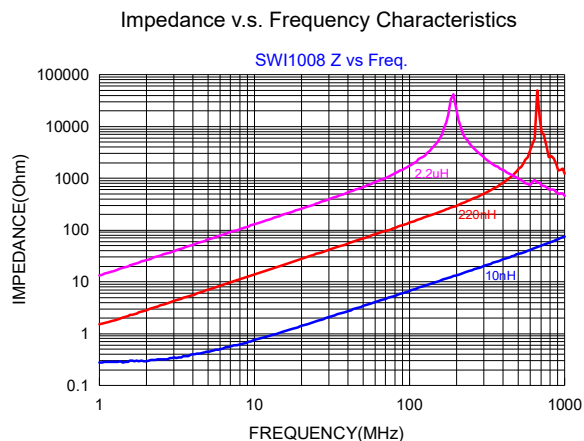

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)

[>>点击查看相关商品](#)