


# Wire Wound Power Common Mode Filter WCM7060FASV-SERIES-LM

## 1. Features

1. High reliability -Reliability tests comply with AEC-Q200
2. Operating temperature-40~+125°C (Including self - temperature rise)



## 2. Dimension

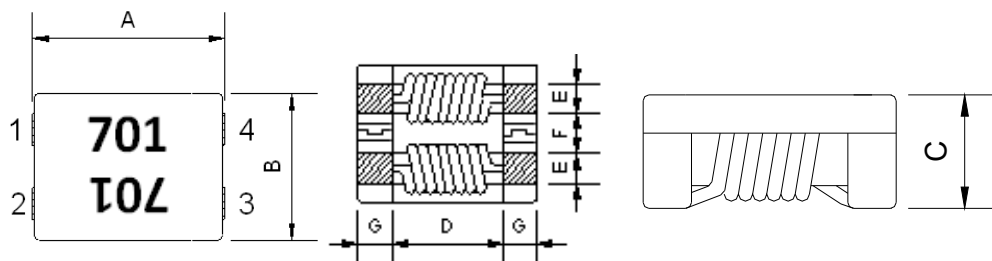

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
WCM7060	7.0±0.5	6.0±0.5	3.8 max.	3.5 typ.	1.5±0.5	1.5±0.5	1.7±0.5

Unit:mm

## 3. Part Numbering



- A: Series  
 B: Dimension  
 C: Material                      Ferrite Core  
 D: Process                        Assembled  
 E: Type                            S=Shielded , N=Unshielded  
 F: Category Code                V=Vehicle  
 G: Impedance                    701=700Ω  
 H: Laser Marking









## 4. Specification

TAI-TECH Part Number	Impedance (Ω)		Test Frequency (MHz)	DC Resistance (mΩ) max. (1 line)	Rated Current (A) max.	Rated Volt. (Vdc) max.	Insulation Resistance (MΩ) min.
	min.	typ.					
WCM7060FASV-400-LM	40	70	100	5	15	80	10
WCM7060FASV-650-LM	65	100	100	5	14	80	10
WCM7060FASV-101-LM	100	140	100	10	9	80	10
WCM7060FASV-301-LM	225	300	100	10	5	80	10
WCM7060FASV-501-LM	400	500	100	10	5	80	10
WCM7060FASV-701-LM	500	700	100	15	4	80	10
WCM7060FASV-102-LM	800	1020	100	17	3	80	10
WCM7060FASV-132-LM	910	1300	100	20	3	80	10


Note:

- Measurement board data
- Material : FR4
- Board dimensions : 100 X 50 X 1.6t mm
- Pattern dimensions: 45 X 30 mm (Double side board)
- Pattern thickness : 50 μm

[www.tai-tech.com.tw](http://www.tai-tech.com.tw)

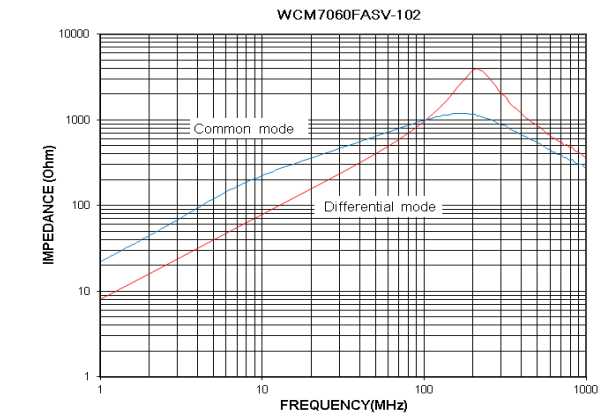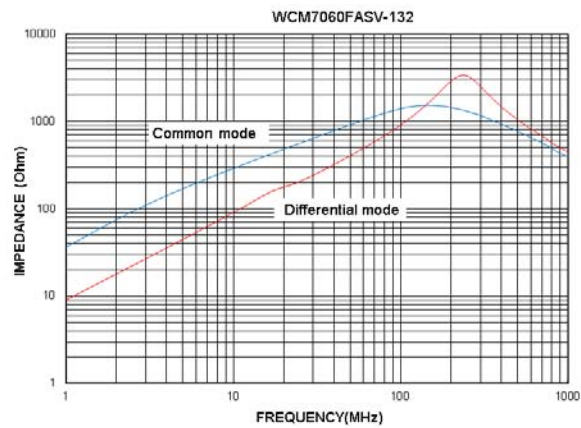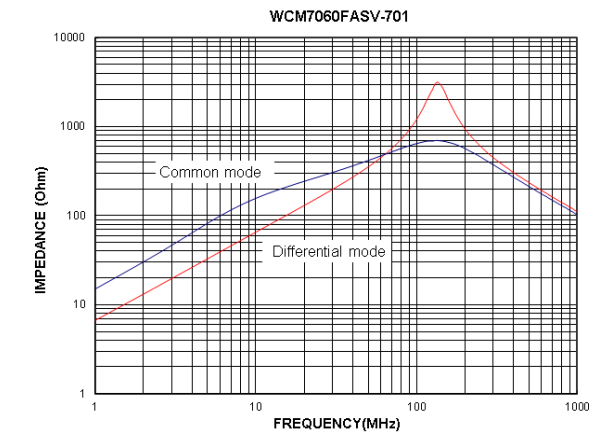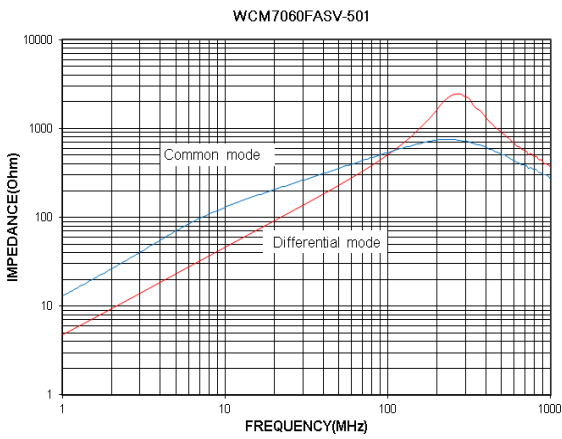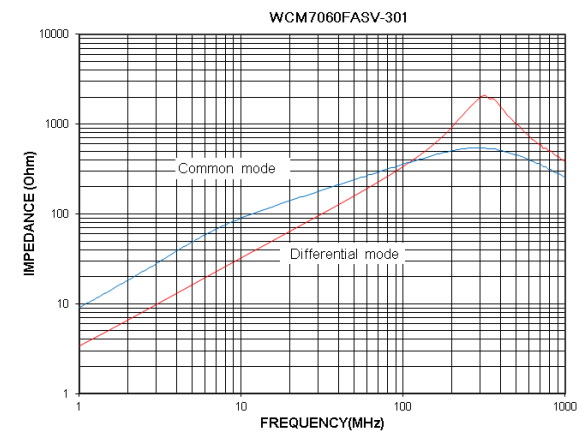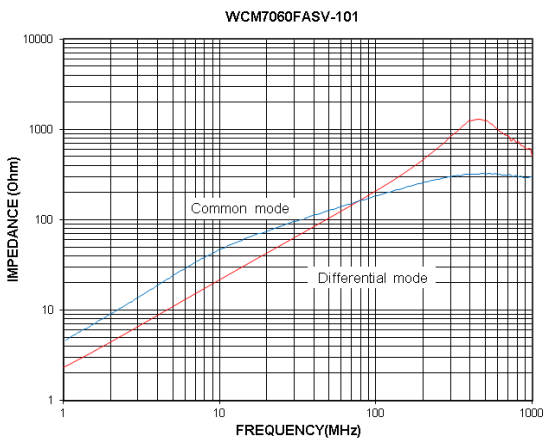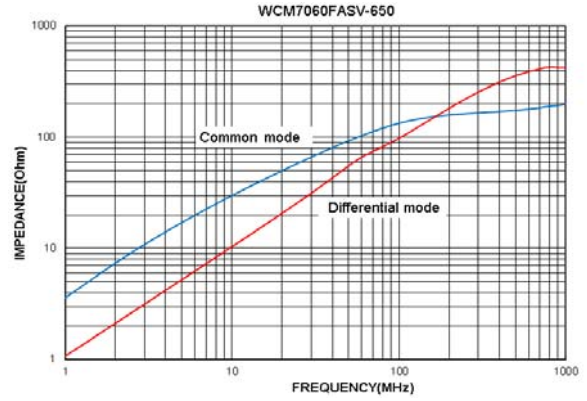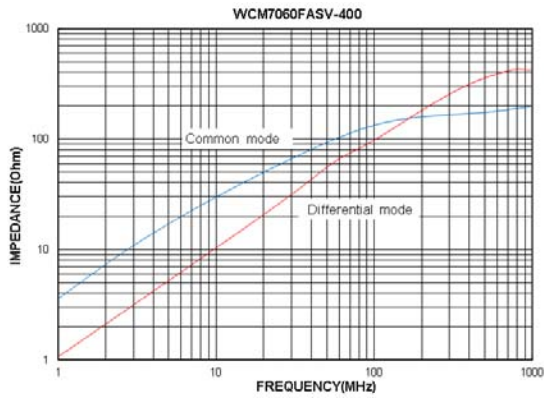

## 5. Schematic Diagram

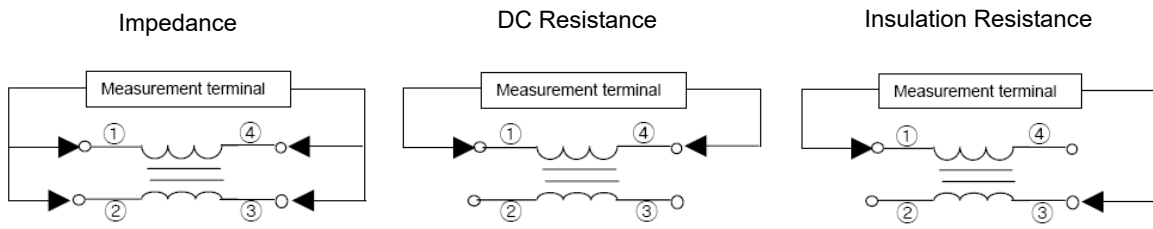

单击下面可查看定价，库存，交付和生命周期等信息

[>>TAI-TECH\(台庆\)](#)