

# Spec Sheet

Medium-High Voltage Multilayer Ceramic Capacitors for Telecommunications Infrastructure and Industrial Equipment

## MBASH31LBC7155KTCA01 (Previous PN: HMK316BC7155KLHTE)



### ■ Features

- Item Summary  
1.5 $\mu$ F $\pm$ 10%, 100V,  
X7S, 1206/3216 (EIA/JIS)
- Lifecycle Stage  
Mass Production (Preferred)
- Standard packaging quantity (minimum)  
Taping Embossed 2000pcs

### ■ Products characteristics table

Capacitance	1.5 $\mu$ F $\pm$ 10 %
Case Size (EIA/JIS)	1206/3216
Rated Voltage	100 V
$\tan \delta$ (max)	3.5 %
Temperature Characteristic (EIA)	X7S
Operating Temp. Range (EIA)	-55 to +125 °C
High Temperature Loading (% Rated Voltage)	150 %
Insulation Resistance (min)	100 M $\Omega$ · $\mu$ F
RoHS Compliance (10 subst.)	Yes
REACH Compliance (209 subst.)	Yes
Halogen Free	Yes
Soldering	Reflow

### ■ External Dimensions

Dimension L	3.2 $\pm$ 0.30 mm
Dimension W	1.6 $\pm$ 0.30 mm
Dimension T	1.6 $\pm$ 0.30 mm
Dimension e	0.50 +0.35/-0.25 mm

2021.11.01

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
TAIYO YUDEN reserves the right to make change to the data at any time without notice.  
Before making final selection, please check product specification.

## Multi Layer Ceramic Capacitor

-Electrical Characteristics Data-






21U2A07

RoHS compliance product

### ○MBASH31LBC7155KTCA01\_(HMK316BC7155KLHTE)

100V 3216 X7S 1.5uF +/- 10% t=1.9mmMAX

100V 1206 X7S 1.5uF +/- 10% t=0.075inchMAX

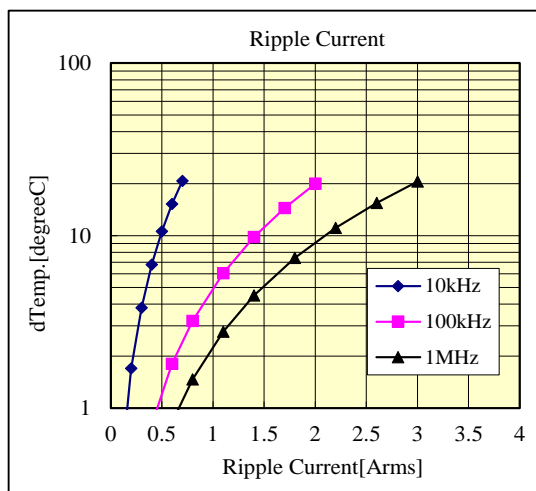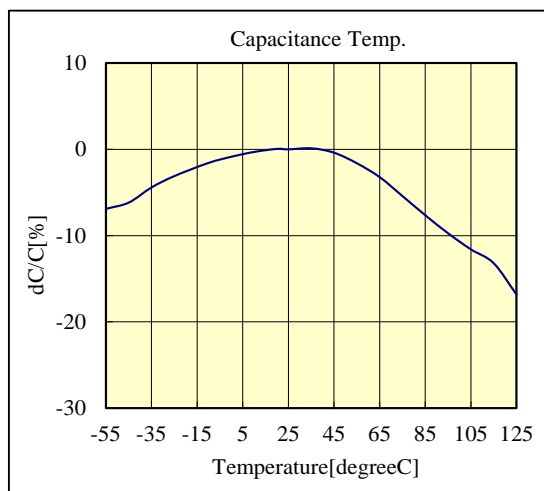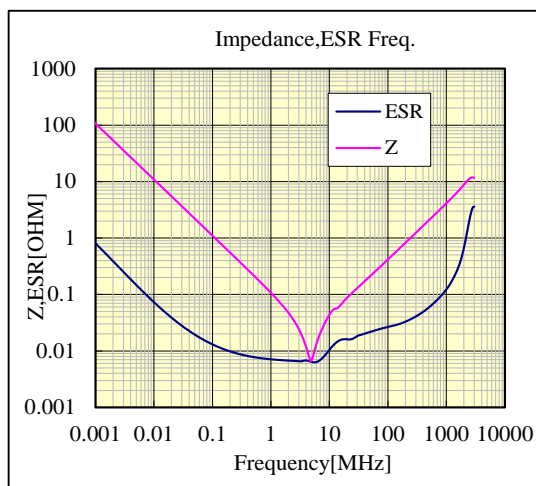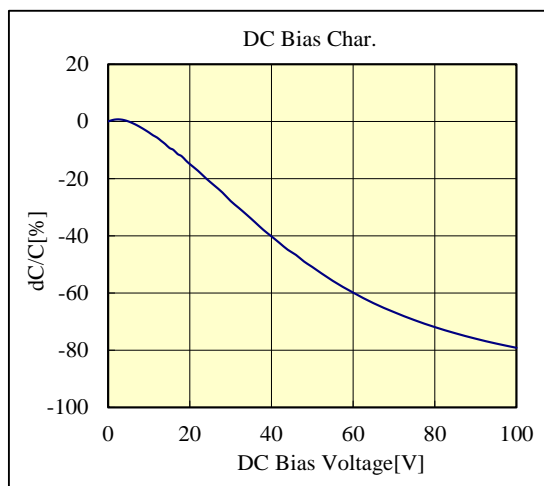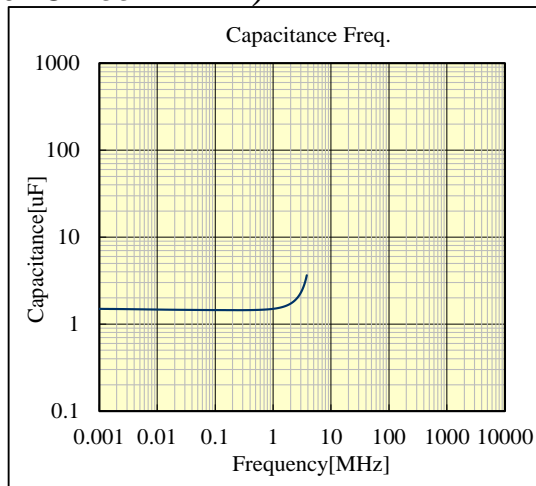

部品特性は設置環境、測定条件等により変化する場合があります。本データをご使用される際は実際の製品特性に対する参考データとしてご利用ください。また、本データは予告無く追加・削除及び変更を行う場合があります。ご注文の際は、納入仕様書のご確認をお願いします。

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.

TAIYO YUDEN reserves the right to make change to the data at any time without notice.

Before making final selection, please check product specification.



单击下面可查看定价，库存，交付和生命周期等信息

[>>Taiyo Yuden\(太阳诱电\)](#)