

Notice for TAIYO YUDEN Products

Please read this notice before using the TAIYO YUDEN products.

REMINDERS

■ Product Information in this Catalog

Product information in this catalog is as of October 2021. All of the contents specified herein and production status of the products listed in this catalog are subject to change without notice due to technical improvement of our products, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that TAIYO YUDEN shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

■ Approval of Product Specifications

Please contact TAIYO YUDEN for further details of product specifications as the individual product specification sheets are available. When using our products, please be sure to approve our product specifications or make a written agreement on the product specification with TAIYO YUDEN in advance.

■ Pre-Evaluation in the Actual Equipment and Conditions

Please conduct validation and verification of our products in actual conditions of mounting and operating environment before using our products.

■ Safety Design

When using our products for high safety and/or reliability-required equipment or circuits, please fully perform safety and/or reliability evaluation. In addition, please install (i) systems equipped with a protection circuit and a protection device and/or (ii) systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault for a failsafe design to ensure safety.

■ Intellectual Property Rights

Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of TAIYO YUDEN or any third parties nor grant any license under such rights.

■ Limited Warranty

Please note that the scope of warranty for our products is limited to the delivered our products themselves conforming to the product specifications specified in the individual product specification sheets, and TAIYO YUDEN shall not be in any way responsible for any damages resulting from a failure or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by TAIYO YUDEN and your company, TAIYO YUDEN will warrant our products in accordance with such agreement, provided, however, that our products shall be used for general-purpose and standard use in the equipment specified in this catalog or the individual product specification sheets.

■ TAIYO YUDEN's Official Sales Channel

The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "TAIYO YUDEN's official sales channel"). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than TAIYO YUDEN's official sales channel.

■ Caution for Export

Some of our products listed in this catalog may require specific procedures for export according to "U.S. Export Administration Regulations", "Foreign Exchange and Foreign Trade Control Law" of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

■ Limited Application

1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment for consumer (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets, or the equipment approved separately by TAIYO YUDEN.

TAIYO YUDEN has the product series intended for use in the following equipment. Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

| Application | Product Series | | Quality Grade ^{*3} |
|-------------|---|--|-----------------------------|
| | Equipment ^{*1} | Category (Part Number Code ^{*2}) | |
| Automotive | Automotive Electronic Equipment (POWERTRAIN, SAFETY) | A | 1 |
| | Automotive Electronic Equipment (BODY & CHASSIS, INFOTAINMENT) | C | 2 |
| Industrial | Telecommunications Infrastructure and Industrial Equipment | B | 2 |
| Medical | Medical Devices classified as GHTF Class C (Japan Class III) | M | 2 |
| | Medical Devices classified as GHTF Classes A or B (Japan Classes I or II) | L | 3 |
| Consumer | General Electronic Equipment | S | 3 |

*Notes: 1. Based on the general specifications required for electronic components for such equipment, which are recognized by TAIYO YUDEN, the use of each product series for the equipment is recommended. Please be sure to contact TAIYO YUDEN before using our products for equipment other than those covered by the product series.

2. On each of our part number, the 2nd code from the left is a code indicating the "Category" as shown in the above table. For details, please check the explanatory materials regarding the part numbering system of each of our products.

3. Each product series is assigned a "Quality Grade" from 1 to 3 in order of higher quality. Please do not incorporate a product into any equipment with a higher Quality Grade than the Quality Grade of such product without the prior written consent of TAIYO YUDEN.

2. Equipment Requiring Inquiry

Please be sure to contact TAIYO YUDEN for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment ^{*1}
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices ^{*2}
- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

*Notes: 1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by TAIYO YUDEN. Please be sure to contact TAIYO YUDEN for further information before using our products for such aviation equipment.

2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

4. Limitation of Liability

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by TAIYO YUDEN, or any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

Wire-wound Ferrite Power Inductors LSXB/LSXN/LSXP series for General Electronic Equipment for Consumer

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

REFLOW

PART NUMBER

* Operating Temp.: -25~+120°C (LSXN 4040/5050/6060/8080: -25~+125°C) (Including self-generated heat)

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | S | X | B | D | 4 | 0 | 4 | 0 | T | K | L | 1 | 0 | 0 | M | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | | | | | | | | | |

① Series

| Code (1)(2)(3)(4) | |
|----------------------|---|
| LSXB | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |
| LSXN | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |
| LSXP | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |

(1) Product Group

| Code | |
|------|-----------|
| L | Inductors |

(2) Category

| Code | Recommended equipment | Quality Grade |
|------|---|---------------|
| S | General Electronic Equipment for Consumer | 3 |

② Features

| Code | Feature |
|------|--------------------------------|
| D | Bottom electrode (Ag × solder) |
| E | Bottom electrode (Cu × solder) |
| H | Bottom electrode (Frame type) |

③ Dimensions (L × W)

| Code | Dimensions (L × W) [mm] |
|------|-------------------------|
| 2020 | 2.0 × 2.0 |
| 2424 | 2.4 × 2.4 |
| 3030 | 3.0 × 3.0 |
| 4040 | 4.0 × 4.0 |
| 5050 | 5.0 × 5.0 |
| 6060 | 6.0 × 6.0 |
| 8080 | 8.0 × 8.0 |
| YE | 4.5 |

④ Dimensions (H)

| Code | Dimensions (H) [mm] |
|------|---------------------|
| KK | 1.0 |
| MK | 1.2 |
| PK | 1.4 |
| QK | 1.5 |
| TK | 1.8 |
| WK | 2.0 |
| WD | 2.4 |
| WE | 2.5 |
| WH | 2.8 |
| XK | 3.0 |
| XA | 3.1 |
| YK | 4.0 |
| YA | 4.1 |
| YB | 4.2 |

(3) Type

| Code | |
|------|--------------------------------|
| X | Ferrite Wire-wound (Drum type) |

(4) Features, Characteristics

| Code | |
|------|--------------------------|
| B | Standard |
| N | Standard Power choke |
| P | High current power choke |

⑤ Packaging

| Code | Packaging |
|------|-----------|
| T | Taping |
| L | Taping |

⑥ Nominal inductance


| Code (example) | Nominal inductance [μH] |
|-------------------|-------------------------|
| 2R2 | 2.2 |
| 100 | 10 |
| 101 | 100 |

※R=Decimal point

⑦ Inductance tolerance


| Code | Inductance tolerance |
|------|----------------------|
| M | ±20% |
| N | ±30% |

⑧ Internal code

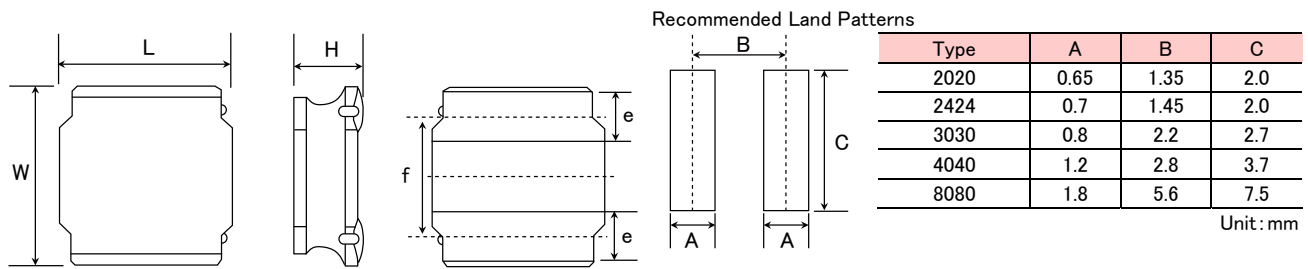STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY


| Type | L | W | H | e | f | Standard quantity [pcs] Taping |
|--------|--------------------------|--------------------------|------------------------|---------------------------|---------------------------|-----------------------------------|
| 2020KK | 2.0±0.1 (0.079±0.004) | 2.0±0.1 (0.079±0.004) | 1.0 max (0.039 max) | 0.5±0.2 (0.020±0.008) | 1.25±0.2 (0.050±0.008) | 2500 |
| 2020MK | 2.0±0.1 (0.079±0.004) | 2.0±0.1 (0.079±0.004) | 1.2 max (0.047 max) | 0.5±0.2 (0.020±0.008) | 1.25±0.2 (0.050±0.008) | 2500 |
| 2424KK | 2.4±0.1 (0.095±0.004) | 2.4±0.1 (0.095±0.004) | 1.0 max (0.039 max) | 0.6±0.2 (0.024±0.008) | 1.45±0.2 (0.057±0.008) | 2500 |
| 2424MK | 2.4±0.1 (0.095±0.004) | 2.4±0.1 (0.095±0.004) | 1.2 max (0.047 max) | 0.6±0.2 (0.024±0.008) | 1.45±0.2 (0.057±0.008) | 2500 |
| 3030KK | 3.0±0.1 (0.118±0.004) | 3.0±0.1 (0.118±0.004) | 1.0 max (0.039 max) | 0.9±0.2 (0.035±0.008) | 1.9±0.2 (0.075±0.008) | 2000 |
| 3030MK | 3.0±0.1 (0.118±0.004) | 3.0±0.1 (0.118±0.004) | 1.2 max (0.047 max) | 0.9±0.2 (0.035±0.008) | 1.9±0.2 (0.075±0.008) | 2000 |
| 3030QK | 3.0±0.1 (0.118±0.004) | 3.0±0.1 (0.118±0.004) | 1.5 max (0.059 max) | 0.9±0.2 (0.035±0.008) | 1.9±0.2 (0.075±0.008) | 2000 |
| 4040KK | 4.0±0.2 (0.158±0.008) | 4.0±0.2 (0.158±0.008) | 1.0 max (0.039 max) | 1.1±0.2 (0.043±0.008) | 2.5±0.2 (0.098±0.008) | 5000 |
| 4040MK | 4.0±0.2 (0.158±0.008) | 4.0±0.2 (0.158±0.008) | 1.2 max (0.047 max) | 1.1±0.2 (0.043±0.008) | 2.5±0.2 (0.098±0.008) | 4500 |
| 4040TK | 4.0±0.2 (0.158±0.008) | 4.0±0.2 (0.158±0.008) | 1.8 max (0.071 max) | 1.1±0.2 (0.043±0.008) | 2.5±0.2 (0.098±0.008) | 3500 |
| 8080XK | 8.0±0.2 (0.315±0.008) | 8.0±0.2 (0.315±0.008) | 3.0 max (0.118 max) | 1.60±0.3 (0.063±0.012) | 5.6±0.3 (0.22±0.012) | 1000 |
| 8080YK | 8.0±0.2 (0.315±0.008) | 8.0±0.2 (0.315±0.008) | 4.0 max (0.158 max) | 1.60±0.3 (0.063±0.012) | 5.6±0.3 (0.22±0.012) | 1000 |
| 8080YB | 8.0±0.2 (0.315±0.008) | 8.0±0.2 (0.315±0.008) | 4.2 max (0.165 max) | 1.60±0.3 (0.063±0.012) | 5.6±0.3 (0.22±0.012) | 1000 |

Unit: mm (inch)

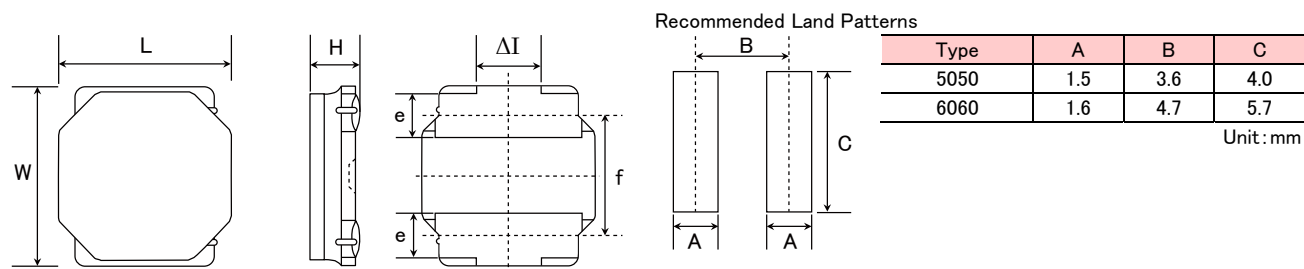

| Type | A | B | C |
|------|-----|-----|-----|
| 5050 | 1.5 | 3.6 | 4.0 |
| 6060 | 1.6 | 4.7 | 5.7 |

Unit: mm

| Type | L | W | H | e | f | ΔI | Standard quantity [pcs] Taping |
|--------|--|--|------------------------|---|--|----------------------|-----------------------------------|
| 5050KK | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 1.0 max (0.039 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 1000 |
| 5050MK | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 1.2 max (0.047 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 1000 |
| 5050PK | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 1.4 max (0.055 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 1000 |
| 5050WK | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 2.0 max (0.079 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 800 |
| 5050WD | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 2.4 max (0.095 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 2500 |
| 5050WE | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 2.5 max (0.098 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 2500 |
| 5050XK | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 3.0 max (0.118 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 500 |
| 5050XA | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 3.1 max (0.122 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 500 |
| 5050YK | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 4.0 max (0.158 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 1500 |
| 5050YA | 4.9 ± 0.2 (0.193 ± 0.008) | 4.9 ± 0.2 (0.193 ± 0.008) | 4.1 max (0.161 max) | 1.2 ± 0.2 (0.047 ± 0.008) | 3.3 ± 0.2 (0.130 ± 0.008) | 1.3typ (0.051typ) | 1500 |
| 6060KK | 6.0 ± 0.2 (0.236 ± 0.008) | 6.0 ± 0.2 (0.236 ± 0.008) | 1.0 max (0.039 max) | 1.35 ± 0.2 (0.053 ± 0.008) | 4.0 ± 0.2 (0.158 ± 0.008) | 2.3typ (0.091typ) | 1000 |
| 6060MK | 6.0 ± 0.2 (0.236 ± 0.008) | 6.0 ± 0.2 (0.236 ± 0.008) | 1.2 max (0.047 max) | 1.35 ± 0.2 (0.053 ± 0.008) | 4.0 ± 0.2 (0.158 ± 0.008) | 2.3typ (0.091typ) | 1000 |
| 6060PK | 6.0 ± 0.2 (0.236 ± 0.008) | 6.0 ± 0.2 (0.236 ± 0.008) | 1.4 max (0.055 max) | 1.35 ± 0.2 (0.053 ± 0.008) | 4.0 ± 0.2 (0.158 ± 0.008) | 2.3typ (0.091typ) | 1000 |
| 6060WK | 6.0 ± 0.2 (0.236 ± 0.008) | 6.0 ± 0.2 (0.236 ± 0.008) | 2.0 max (0.079 max) | 1.35 ± 0.2 (0.053 ± 0.008) | 4.0 ± 0.2 (0.158 ± 0.008) | 2.3typ (0.091typ) | 2500 |
| 6060WH | 6.0 ± 0.2 (0.236 ± 0.008) | 6.0 ± 0.2 (0.236 ± 0.008) | 2.8 max (0.110 max) | 1.35 ± 0.2 (0.053 ± 0.008) | 4.0 ± 0.2 (0.158 ± 0.008) | 2.3typ (0.091typ) | 2000 |
| 6060YE | 6.0 ± 0.2 (0.236 ± 0.008) | 6.0 ± 0.2 (0.236 ± 0.008) | 4.5 max (0.177 max) | 1.35 ± 0.2 (0.053 ± 0.008) | 4.0 ± 0.2 (0.158 ± 0.008) | 2.3typ (0.091typ) | 1500 |

Unit: mm (inch)

■ PART NUMBER

● 2020MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND2020MKT1R0N0G | NRS2012T 1R0N GJ | RoHS | 1.0 | ±30% | — | 0.070 | 1,900 | 2,050 | 1,700 | 1,850 | 100 |
| LSXND2020MKT1R5N0G | NRS2012T 1R5N GJ | RoHS | 1.5 | ±30% | — | 0.090 | 1,650 | 1,800 | 1,500 | 1,650 | 100 |
| LSXND2020MKT2R2M0G | NRS2012T 2R2M GJ | RoHS | 2.2 | ±20% | — | 0.107 | 1,350 | 1,500 | 1,370 | 1,500 | 100 |
| LSXND2020MKT3R3M0G | NRS2012T 3R3M GJ | RoHS | 3.3 | ±20% | — | 0.190 | 1,000 | 1,150 | 1,020 | 1,100 | 100 |
| LSXND2020MKT4R7M0G | NRS2012T 4R7M GJ | RoHS | 4.7 | ±20% | — | 0.241 | 900 | 1,050 | 910 | 1,000 | 100 |

● 2020KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXPD2020KKT4R7N0G | NRV2010T 4R7N GF | RoHS | 0.47 | ±30% | — | 0.052 | 2,100 | 2,250 | 2,000 | 2,300 | 100 |
| LSXPD2020KKT6R8N0G | NRV2010T 6R8N GF | RoHS | 0.68 | ±30% | — | 0.060 | 1,850 | 2,000 | 1,850 | 2,100 | 100 |
| LSXPD2020KKT1R0N0G | NRV2010T 1R0N GF | RoHS | 1.0 | ±30% | — | 0.080 | 1,550 | 1,700 | 1,600 | 1,850 | 100 |
| LSXPD2020KKT1R5M0G | NRV2010T 1R5M GF | RoHS | 1.5 | ±20% | — | 0.100 | 1,350 | 1,450 | 1,450 | 1,650 | 100 |
| LSXPD2020KKT2R2M0G | NRV2010T 2R2M GF | RoHS | 2.2 | ±20% | — | 0.175 | 1,100 | 1,200 | 1,100 | 1,200 | 100 |
| LSXPD2020KKT3R3M0G | NRV2010T 3R3M GF | RoHS | 3.3 | ±20% | — | 0.250 | 880 | 950 | 1,000 | 1,100 | 100 |
| LSXPD2020KKT4R7M0G | NRV2010T 4R7M GF | RoHS | 4.7 | ±20% | — | 0.320 | 760 | 810 | 820 | 930 | 100 |

● 2020MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXPD2020MKT1R0N0G | NRV2012T 1R0N GF | RoHS | 1.0 | ±30% | — | 0.073 | 2,200 | 2,350 | 1,650 | 1,830 | 100 |
| LSXPD2020MKT1R5N0G | NRV2012T 1R5N GF | RoHS | 1.5 | ±30% | — | 0.100 | 1,800 | 1,950 | 1,400 | 1,550 | 100 |
| LSXPD2020MKT2R2M0G | NRV2012T 2R2M GF | RoHS | 2.2 | ±20% | — | 0.129 | 1,600 | 1,700 | 1,200 | 1,350 | 100 |
| LSXPD2020MKT3R3M0G | NRV2012T 3R3M GF | RoHS | 3.3 | ±20% | — | 0.227 | 1,250 | 1,350 | 900 | 1,040 | 100 |
| LSXPD2020MKT4R7M0G | NRV2012T 4R7M GF | RoHS | 4.7 | ±20% | — | 0.325 | 1,100 | 1,150 | 750 | 850 | 100 |

● 2424KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|-------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXNE2424KKT6R8NN | NRH2410T 6R8NN 4 | RoHS | 0.68 | ±30% | 120 | 0.060 | 2,200 | 2,300 | 1,570 | 1,810 | 100 |
| LSXNE2424KKT1R0NN | NRH2410T 1R0NN 4 | RoHS | 1.0 | ±30% | 106 | 0.070 | 1,800 | 1,950 | 1,410 | 1,640 | 100 |
| LSXNE2424KKT1R5MN | NRH2410T 1R5MN | RoHS | 1.5 | ±20% | 94 | 0.110 | 1,550 | 1,640 | 1,160 | 1,320 | 100 |
| LSXNE2424KKT2R2MN | NRH2410T 2R2MN | RoHS | 2.2 | ±20% | 77 | 0.150 | 1,290 | 1,340 | 970 | 1,110 | 100 |
| LSXNE2424KKT3R3MN | NRH2410T 3R3MN | RoHS | 3.3 | ±20% | 56 | 0.220 | 1,000 | 1,140 | 770 | 890 | 100 |
| LSXNE2424KKT4R7MN | NRH2410T 4R7MN | RoHS | 4.7 | ±20% | 50 | 0.290 | 880 | 930 | 670 | 780 | 100 |
| LSXNE2424KKT6R8MN | NRH2410T 6R8MN | RoHS | 6.8 | ±20% | 43 | 0.410 | 750 | 765 | 570 | 650 | 100 |
| LSXNE2424KKT100MN | NRH2410T 100MN | RoHS | 10 | ±20% | 32 | 0.690 | 550 | 605 | 450 | 520 | 100 |
| LSXNE2424KKT150MN | NRH2410T 150MN | RoHS | 15 | ±20% | 27 | 1.02 | 470 | 520 | 370 | 430 | 100 |
| LSXNE2424KKT220MN | NRH2410T 220MN | RoHS | 22 | ±20% | 22 | 1.47 | 390 | 405 | 300 | 340 | 100 |

● 2424MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXNE2424MKT4R7NNG | NRH2412T 4R7NNGJ | RoHS | 0.47 | ±30% | 180 | 0.050 | 2,900 | 3,690 | 2,100 | 2,300 | 100 |
| LSXNE2424MKT1R0NNG | NRH2412T 1R0NNGH | RoHS | 1.0 | ±30% | 101 | 0.077 | 2,350 | 2,610 | 1,300 | 1,540 | 100 |
| LSXNE2424MKT1R5NNG | NRH2412T 1R5NNGH | RoHS | 1.5 | ±30% | 89 | 0.100 | 2,100 | 2,290 | 1,150 | 1,390 | 100 |
| LSXNE2424MKT2R2MNG | NRH2412T 2R2MNGH | RoHS | 2.2 | ±20% | 72 | 0.140 | 1,700 | 1,940 | 1,000 | 1,190 | 100 |
| LSXNE2424MKT3R3MNG | NRH2412T 3R3MNGH | RoHS | 3.3 | ±20% | 56 | 0.225 | 1,400 | 1,600 | 750 | 890 | 100 |
| LSXNE2424MKT4R7MNG | NRH2412T 4R7MNGH | RoHS | 4.7 | ±20% | 45 | 0.300 | 1,150 | 1,280 | 650 | 770 | 100 |
| LSXNE2424MKT6R8MNG | NRH2412T 6R8MNGH | RoHS | 6.8 | ±20% | 34 | 0.420 | 950 | 1,100 | 550 | 635 | 100 |
| LSXNE2424MKT100MNG | NRH2412T 100MNGH | RoHS | 10 | ±20% | 29 | 0.600 | 810 | 900 | 450 | 510 | 100 |

● 3020KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|-------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXNE3030KKT1R2NN | NRH3010T 1R2NN | RoHS | 1.2 | ±30% | 120 | 0.065 | 1,700 | 1,740 | 1,480 | 1,850 | 100 |
| LSXNE3030KKT1R5NN | NRH3010T 1R5NN | RoHS | 1.5 | ±30% | 99 | 0.075 | 1,440 | 1,500 | 1,370 | 1,680 | 100 |
| LSXNE3030KKT2R2MN | NRH3010T 2R2MN | RoHS | 2.2 | ±20% | 86 | 0.083 | 1,300 | 1,400 | 1,300 | 1,550 | 100 |
| LSXNE3030KKT3R3MN | NRH3010T 3R3MN | RoHS | 3.3 | ±20% | 64 | 0.130 | 1,000 | 1,020 | 1,030 | 1,220 | 100 |
| LSXNE3030KKT4R7MN | NRH3010T 4R7MN | RoHS | 4.7 | ±20% | 50 | 0.170 | 850 | 930 | 900 | 1,090 | 100 |
| LSXNE3030KKT6R8MN | NRH3010T 6R8MN | RoHS | 6.8 | ±20% | 44 | 0.250 | 700 | 750 | 745 | 920 | 100 |
| LSXNE3030KKT100MN | NRH3010T 100MN | RoHS | 10 | ±20% | 34 | 0.350 | 600 | 650 | 620 | 780 | 100 |
| LSXNE3030KKT150MN | NRH3010T 150MN | RoHS | 15 | ±20% | 25 | 0.550 | 450 | 520 | 480 | 600 | 100 |
| LSXNE3030KKT220MN | NRH3010T 220MN | RoHS | 22 | ±20% | 22 | 0.770 | 380 | 440 | 410 | 510 | 100 |
| LSXNE3030KKT330MN | NRH3010T 330MN | RoHS | 33 | ±20% | 20 | 1.250 | 290 | 360 | 350 | 440 | 100 |
| LSXNE3030KKT470MN | NRH3010T 470MN | RoHS | 47 | ±20% | 17 | 2.050 | 250 | 300 | 285 | 320 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ PART NUMBER

● 3030MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|-------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXNE3030MKT47NN | NRH3012T R47NN | RoHS | 0.47 | ±30% | 160 | 0.033 | 2,600 | 3,200 | 1,900 | 2,280 | 100 |
| LSXNE3030MKT1R0NN | NRH3012T 1R0NN | RoHS | 1.0 | ±30% | 111 | 0.048 | 2,200 | 2,500 | 1,710 | 1,970 | 100 |
| LSXNE3030MKT1R5NN | NRH3012T 1R5NN | RoHS | 1.5 | ±30% | 95 | 0.055 | 1,700 | 1,900 | 1,600 | 1,750 | 100 |
| LSXNE3030MKT2R2MN | NRH3012T 2R2MN | RoHS | 2.2 | ±20% | 78 | 0.075 | 1,500 | 1,750 | 1,370 | 1,600 | 100 |
| LSXNE3030MKT3R3MN | NRH3012T 3R3MN | RoHS | 3.3 | ±20% | 61 | 0.100 | 1,200 | 1,500 | 1,210 | 1,480 | 100 |
| LSXNE3030MKT4R7MN | NRH3012T 4R7MN | RoHS | 4.7 | ±20% | 50 | 0.130 | 1,000 | 1,200 | 1,060 | 1,280 | 100 |
| LSXNE3030MKT6R8MN | NRH3012T 6R8MN | RoHS | 6.8 | ±20% | 43 | 0.190 | 850 | 910 | 890 | 1,000 | 100 |
| LSXNE3030MKT100MN | NRH3012T 100MN | RoHS | 10 | ±20% | 32 | 0.270 | 730 | 780 | 720 | 850 | 100 |
| LSXNE3030MKT150MN | NRH3012T 150MN | RoHS | 15 | ±20% | 26 | 0.450 | 530 | 650 | 570 | 680 | 100 |
| LSXNE3030MKT220MN | NRH3012T 220MN | RoHS | 22 | ±20% | 22 | 0.630 | 500 | 550 | 500 | 590 | 100 |
| LSXNE3030MKT330MN | NRH3012T 330MN | RoHS | 33 | ±20% | 18 | 0.960 | 360 | 430 | 450 | 510 | 100 |
| LSXNE3030MKT470MN | NRH3012T 470MN | RoHS | 47 | ±20% | 16 | 1.340 | 280 | 380 | 380 | 430 | 100 |

● 3030MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXPD3030MKT1R0N | NRV3012T 1R0N | RoHS | 1.0 | ±30% | 110 | 0.065 | 2,500 | 3,000 | 1,600 | 1,970 | 100 |
| LSXPD3030MKT1R5N | NRV3012T 1R5N | RoHS | 1.5 | ±30% | 92 | 0.075 | 2,100 | 2,500 | 1,400 | 1,610 | 100 |
| LSXPD3030MKT2R2M | NRV3012T 2R2M | RoHS | 2.2 | ±20% | 70 | 0.120 | 1,800 | 2,100 | 1,100 | 1,330 | 100 |
| LSXPD3030MKT3R3M | NRV3012T 3R3M | RoHS | 3.3 | ±20% | 55 | 0.150 | 1,600 | 1,900 | 1,000 | 1,260 | 100 |
| LSXPD3030MKT4R7M | NRV3012T 4R7M | RoHS | 4.7 | ±20% | 48 | 0.190 | 1,250 | 1,500 | 850 | 1,040 | 100 |
| LSXPD3030MKT6R8M | NRV3012T 6R8M | RoHS | 6.8 | ±20% | 40 | 0.300 | 950 | 1,200 | 650 | 800 | 100 |
| LSXPD3030MKT100M | NRV3012T 100M | RoHS | 10 | ±20% | 32 | 0.470 | 800 | 990 | 550 | 640 | 100 |

● 3030QK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND3030QKT1R0NNG | NRS3015T 1R0NNGH | RoHS | 1.0 | ±30% | 100 | 0.030 | 2,100 | 2,400 | 2,100 | 2,350 | 100 |
| LSXND3030QKT1R5NNG | NRS3015T 1R5NNGH | RoHS | 1.5 | ±30% | 87 | 0.038 | 1,800 | 2,100 | 1,820 | 2,100 | 100 |
| LSXND3030QKT2R2MNG | NRS3015T 2R2MNGH | RoHS | 2.2 | ±20% | 64 | 0.058 | 1,480 | 1,700 | 1,500 | 1,800 | 100 |
| LSXND3030QKT3R3MNG | NRS3015T 3R3MNGH | RoHS | 3.3 | ±20% | 49 | 0.078 | 1,210 | 1,400 | 1,230 | 1,500 | 100 |
| LSXND3030QKT4R7MNG | NRS3015T 4R7MNGH | RoHS | 4.7 | ±20% | 40 | 0.120 | 1,020 | 1,100 | 1,040 | 1,300 | 100 |
| LSXND3030QKT6R8MNG | NRS3015T 6R8MNGH | RoHS | 6.8 | ±20% | 36 | 0.160 | 870 | 920 | 880 | 1,100 | 100 |
| LSXND3030QKT100MNG | NRS3015T 100MNGH | RoHS | 10 | ±20% | 28 | 0.220 | 700 | 750 | 710 | 840 | 100 |
| LSXND3030QKT150MNG | NRS3015T 150MNGH | RoHS | 15 | ±20% | 23 | 0.325 | 580 | 680 | 680 | 760 | 100 |
| LSXND3030QKT220MNG | NRS3015T 220MNGH | RoHS | 22 | ±20% | 20 | 0.520 | 470 | 540 | 470 | 530 | 100 |
| LSXND3030QKT330MNG | NRS3015T 330MNGH | RoHS | 33 | ±20% | 18 | 0.780 | 400 | 440 | 440 | 490 | 100 |
| LSXND3030QKT470MNG | NRS3015T 470MNGH | RoHS | 47 | ±20% | 17 | 1.100 | 325 | 380 | 350 | 380 | 100 |

● 4040KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND4040KKL1R0NDG | NRS4010T 1R0NDGG | RoHS | 1.0 | ±30% | 116 | 0.056 | 2,000 | 2,280 | 1,900 | 2,390 | 100 |
| LSXND4040KKL2R2MDG | NRS4010T 2R2MDGG | RoHS | 2.2 | ±20% | 73 | 0.085 | 1,200 | 1,610 | 1,500 | 1,800 | 100 |
| LSXND4040KKL3R3MDG | NRS4010T 3R3MDGG | RoHS | 3.3 | ±20% | 58 | 0.100 | 1,100 | 1,300 | 1,400 | 1,700 | 100 |
| LSXND4040KKL4R7MDG | NRS4010T 4R7MDGG | RoHS | 4.7 | ±20% | 47 | 0.140 | 950 | 1,100 | 1,200 | 1,450 | 100 |
| LSXND4040KKL6R8MDG | NRS4010T 6R8MDGG | RoHS | 6.8 | ±20% | 38 | 0.200 | 800 | 890 | 1,000 | 1,200 | 100 |
| LSXND4040KKL100MDG | NRS4010T 100MDGG | RoHS | 10 | ±20% | 31 | 0.300 | 620 | 760 | 750 | 860 | 100 |
| LSXND4040KKL150MDG | NRS4010T 150MDGG | RoHS | 15 | ±20% | 24 | 0.430 | 540 | 635 | 600 | 700 | 100 |
| LSXND4040KKL220MDG | NRS4010T 220MDGG | RoHS | 22 | ±20% | 19 | 0.570 | 450 | 540 | 500 | 600 | 100 |
| LSXND4040KKL330MDG | NRS4010T 330MDGG | RoHS | 33 | ±20% | 15 | 0.900 | 350 | 440 | 400 | 460 | 100 |
| LSXND4040KKL470MDG | NRS4010T 470MDGG | RoHS | 47 | ±20% | 13 | 1.250 | 300 | 350 | 350 | 370 | 100 |

● 4040MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND4040MKL1R0NDG | NRS4012T 1R0NDGG | RoHS | 1.0 | ±30% | 100 | 0.042 | 2,800 | 2,900 | 2,200 | 2,670 | 100 |
| LSXND4040MKL1R5NDG | NRS4012T 1R5NDGG | RoHS | 1.5 | ±30% | 90 | 0.051 | 2,300 | 2,500 | 2,000 | 2,430 | 100 |
| LSXND4040MKL2R2MDG | NRS4012T 2R2MDGJ | RoHS | 2.2 | ±20% | 70 | 0.060 | 1,650 | 1,950 | 1,900 | 2,100 | 100 |
| LSXND4040MKL3R3MDG | NRS4012T 3R3MDGJ | RoHS | 3.3 | ±20% | 60 | 0.070 | 1,400 | 1,700 | 1,700 | 1,880 | 100 |
| LSXND4040MKL4R7MDG | NRS4012T 4R7MDGJ | RoHS | 4.7 | ±20% | 45 | 0.095 | 1,200 | 1,320 | 1,500 | 1,570 | 100 |
| LSXND4040MKL6R8MDG | NRS4012T 6R8MDGJ | RoHS | 6.8 | ±20% | 35 | 0.125 | 900 | 1,170 | 1,300 | 1,400 | 100 |
| LSXND4040MKL100MDG | NRS4012T 100MDGJ | RoHS | 10 | ±20% | 30 | 0.170 | 800 | 990 | 1,100 | 1,200 | 100 |
| LSXND4040MKL150MDG | NRS4012T 150MDGJ | RoHS | 15 | ±20% | 24 | 0.260 | 650 | 820 | 750 | 840 | 100 |
| LSXND4040MKL220MDG | NRS4012T 220MDGJ | RoHS | 22 | ±20% | 18 | 0.400 | 500 | 620 | 620 | 650 | 100 |
| LSXND4040MKL330MDG | NRS4012T 330MDGJ | RoHS | 33 | ±20% | 15 | 0.600 | 400 | 500 | 480 | 530 | 100 |
| LSXND4040MKL470MDG | NRS4012T 470MDGJ | RoHS | 47 | ±20% | 12 | 0.770 | 350 | 430 | 420 | 470 | 100 |

- ※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)
- ※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)
- ※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ PART NUMBER

● 4040TK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND4040TKL1R0NDG | NRS4018T 1R0NDGJ | RoHS | 1.0 | ±30% | 90 | 0.027 | 4,000 | 4,590 | 3,200 | 3,720 | 100 |
| LSXND4040TKL1R5NDG | NRS4018T 1R5NDGJ | RoHS | 1.5 | ±30% | 75 | 0.037 | 3,300 | 3,750 | 2,400 | 3,000 | 100 |
| LSXND4040TKL2R2MDG | NRS4018T 2R2MDGJ | RoHS | 2.2 | ±20% | 60 | 0.042 | 3,000 | 3,110 | 2,200 | 2,590 | 100 |
| LSXND4040TKL3R3MDG | NRS4018T 3R3MDGJ | RoHS | 3.3 | ±20% | 45 | 0.055 | 2,300 | 2,560 | 2,000 | 2,240 | 100 |
| LSXND4040TKL4R7MDG | NRS4018T 4R7MDGJ | RoHS | 4.7 | ±20% | 35 | 0.070 | 2,000 | 2,330 | 1,700 | 1,880 | 100 |
| LSXND4040TKL6R8MDG | NRS4018T 6R8MDGJ | RoHS | 6.8 | ±20% | 30 | 0.098 | 1,600 | 1,820 | 1,450 | 1,690 | 100 |
| LSXND4040TKL100MDG | NRS4018T 100MDGJ | RoHS | 10 | ±20% | 25 | 0.150 | 1,300 | 1,440 | 1,200 | 1,250 | 100 |
| LSXND4040TKL150MDG | NRS4018T 150MDGJ | RoHS | 15 | ±20% | 18 | 0.210 | 1,100 | 1,150 | 850 | 915 | 100 |
| LSXND4040TKL220MDG | NRS4018T 220MDGJ | RoHS | 22 | ±20% | 15 | 0.290 | 900 | 920 | 720 | 810 | 100 |
| LSXND4040TKL330MDG | NRS4018T 330MDGJ | RoHS | 33 | ±20% | 12 | 0.460 | 700 | 830 | 550 | 630 | 100 |
| LSXND4040TKL470MDG | NRS4018T 470MDGJ | RoHS | 47 | ±20% | 10 | 0.650 | 600 | 700 | 440 | 520 | 100 |
| LSXND4040TKL680MDG | NRS4018T 680MDGJ | RoHS | 68 | ±20% | 8.3 | 1.00 | 520 | 600 | 320 | 400 | 100 |
| LSXND4040TKL101MDG | NRS4018T 101MDGJ | RoHS | 100 | ±20% | 6.5 | 1.45 | 420 | 490 | 280 | 330 | 100 |
| LSXND4040TKL151MDG | NRS4018T 151MDGJ | RoHS | 150 | ±20% | 5.5 | 2.30 | 340 | 390 | 220 | 280 | 100 |
| LSXND4040TKL221MDG | NRS4018T 221MDGJ | RoHS | 220 | ±20% | 4.0 | 3.80 | 275 | 310 | 170 | 210 | 100 |

● 5050KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND5050KKT1R0NMG | NRS5010T 1R0NMGF | RoHS | 1.0 | ±30% | 95 | 0.070 | 2,350 | 2,510 | 1,750 | 2,000 | 100 |
| LSXND5050KKT2R2NMG | NRS5010T 2R2NMGF | RoHS | 2.2 | ±30% | 65 | 0.105 | 1,500 | 1,710 | 1,400 | 1,600 | 100 |
| LSXND5050KKT3R3MMG | NRS5010T 3R3MMGF | RoHS | 3.3 | ±20% | 42 | 0.125 | 1,400 | 1,530 | 1,250 | 1,520 | 100 |
| LSXND5050KKT4R7MMG | NRS5010T 4R7MMGF | RoHS | 4.7 | ±20% | 37 | 0.145 | 1,200 | 1,340 | 1,150 | 1,390 | 100 |
| LSXND5050KKT6R8MMG | NRS5010T 6R8MMGF | RoHS | 6.8 | ±20% | 33 | 0.185 | 1,000 | 1,120 | 1,000 | 1,210 | 100 |
| LSXND5050KKT100MMG | NRS5010T 100MMGF | RoHS | 10 | ±20% | 23 | 0.250 | 850 | 970 | 900 | 950 | 100 |
| LSXND5050KKT150MMG | NRS5010T 150MMGF | RoHS | 15 | ±20% | 19 | 0.400 | 680 | 740 | 650 | 700 | 100 |
| LSXND5050KKT220MMG | NRS5010T 220MMGF | RoHS | 22 | ±20% | 15 | 0.600 | 550 | 620 | 450 | 560 | 100 |

● 5050MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND5050MKT1R0NMG | NRS5012T 1R0NMGF | RoHS | 1.0 | ±30% | 100 | 0.053 | 4,500 | 4,670 | 2,300 | 2,750 | 100 |
| LSXND5050MKT1R5NMG | NRS5012T 1R5NMGF | RoHS | 1.5 | ±30% | 86 | 0.070 | 3,800 | 3,970 | 2,200 | 2,470 | 100 |
| LSXND5050MKT2R2MMG | NRS5012T 2R2MMGF | RoHS | 2.2 | ±20% | 70 | 0.085 | 3,100 | 3,510 | 2,000 | 2,300 | 100 |
| LSXND5050MKT3R3MMG | NRS5012T 3R3MMGF | RoHS | 3.3 | ±20% | 48 | 0.160 | 2,400 | 2,580 | 1,450 | 1,650 | 100 |
| LSXND5050MKT4R7MMG | NRS5012T 4R7MMGF | RoHS | 4.7 | ±20% | 40 | 0.180 | 2,200 | 2,320 | 1,400 | 1,560 | 100 |
| LSXND5050MKT6R8MMG | NRS5012T 6R8MMGF | RoHS | 6.8 | ±20% | 36 | 0.260 | 1,700 | 1,950 | 1,100 | 1,260 | 100 |
| LSXND5050MKT100MMG | NRS5012T 100MMGF | RoHS | 10 | ±20% | 26 | 0.420 | 1,400 | 1,550 | 850 | 1,000 | 100 |
| LSXND5050MKT150MMG | NRS5012T 150MMGF | RoHS | 15 | ±20% | 22 | 0.670 | 1,200 | 1,240 | 640 | 740 | 100 |

● 5050PK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND5050PKTR47NMG | NRS5014T R47NMGJ | RoHS | 0.47 | ±30% | 185 | 0.025 | 5,800 | 6,400 | 3,300 | 3,470 | 100 |
| LSXND5050PKT1R2NMG | NRS5014T 1R2NMGJ | RoHS | 1.2 | ±30% | 86 | 0.045 | 3,800 | 4,200 | 2,400 | 3,000 | 100 |
| LSXND5050PKT2R2NMG | NRS5014T 2R2NMGJ | RoHS | 2.2 | ±30% | 56 | 0.065 | 2,800 | 3,100 | 2,000 | 2,400 | 100 |
| LSXND5050PKT3R3NMG | NRS5014T 3R3NMGJ | RoHS | 3.3 | ±30% | 48 | 0.080 | 2,350 | 2,650 | 1,700 | 2,200 | 100 |
| LSXND5050PKT4R7NMG | NRS5014T 4R7NMGJ | RoHS | 4.7 | ±30% | 41 | 0.100 | 2,050 | 2,400 | 1,400 | 1,900 | 100 |
| LSXND5050PKT6R8NMG | NRS5014T 6R8NMGJ | RoHS | 6.8 | ±20% | 33 | 0.150 | 1,600 | 1,850 | 1,200 | 1,450 | 100 |
| LSXND5050PKT100MMG | NRS5014T 100MMGJ | RoHS | 10 | ±20% | 27 | 0.200 | 1,400 | 1,600 | 1,050 | 1,250 | 100 |
| LSXND5050PKT150MMG | NRS5014T 150MMGJ | RoHS | 15 | ±20% | 20 | 0.320 | 1,100 | 1,300 | 650 | 790 | 100 |
| LSXND5050PKT220MMG | NRS5014T 220MMGJ | RoHS | 22 | ±20% | 16 | 0.450 | 900 | 1,000 | 550 | 660 | 100 |

● 5050WK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|---------------------------------|------|-------------------------|----------------------|--------------------------------------|--------------------------|--------------------------|-------|--------------------------------|-------|---------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND5050WKTR47NMG | NRS5020T R47NMGJ | RoHS | 0.47 | ±30% | 230 | 0.012 | 6,100 | 6,900 | 5,000 | 5,800 | 100 |
| LSXND5050WKT1R0NMG | NRS5020T 1R0NMGJ | RoHS | 1.0 | ±30% | 81 | 0.021 | 4,000 | 4,500 | 3,600 | 3,710 | 100 |
| LSXND5050WKT1R5NMG | NRS5020T 1R5NMGJ | RoHS | 1.5 | ±30% | 68 | 0.026 | 3,350 | 3,800 | 3,200 | 3,540 | 100 |
| LSXND5050WKT2R2NMG | NRS5020T 2R2NMGJ | RoHS | 2.2 | ±30% | 57 | 0.035 | 2,900 | 3,200 | 2,900 | 3,200 | 100 |
| LSXND5050WKT3R3NMG | NRS5020T 3R3NMGJ | RoHS | 3.3 | ±30% | 46 | 0.048 | 2,400 | 2,700 | 2,400 | 3,080 | 100 |
| LSXND5050WKT4R7MMG | NRS5020T 4R7MMGJ | RoHS | 4.7 | ±20% | 37 | 0.060 | 2,000 | 2,270 | 2,000 | 2,370 | 100 |
| LSXND5050WKT6R8MMG | NRS5020T 6R8MMGJ | RoHS | 6.8 | ±20% | 30 | 0.090 | 1,600 | 1,850 | 1,650 | 2,200 | 100 |
| LSXND5050WKT100MMG | NRS5020T 100MMGJ | RoHS | 10 | ±20% | 24 | 0.120 | 1,300 | 1,480 | 1,450 | 1,850 | 100 |
| LSXND5050WKT150MMG | NRS5020T 150MMGJ | RoHS | 15 | ±20% | 20 | 0.165 | 1,100 | 1,260 | 1,200 | 1,480 | 100 |
| LSXND5050WKT220MMG | NRS5020T 220MMGJ | RoHS | 22 | ±20% | 17 | 0.260 | 900 | 1,100 | 1,000 | 1,230 | 100 |
| LSXND5050WKT470MMG | NRS5020T 470MMGJ | RoHS | 47 | ±20% | 12 | 0.435 | 630 | 750 | 560 | 610 | 100 |
| LSXND5050WKT101MMG | NRS5020T 101MMGJ | RoHS | 100 | ±20% | 7 | 0.850 | 420 | 510 | 400 | 450 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)
 ※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)
 ※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ PART NUMBER

● 6060PK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND6060PKT1R2NMGG | NRS6014T 1R2NMGG | RoHS | 1.2 | ±30% | 77 | 0.042 | 4,000 | 4,400 | 2,750 | 3,200 | 100 |
| LSXND6060PKT2R2NMGG | NRS6014T 2R2NMGG | RoHS | 2.2 | ±30% | 61 | 0.055 | 3,000 | 3,500 | 2,300 | 2,600 | 100 |
| LSXND6060PKT3R3NMGG | NRS6014T 3R3NMGG | RoHS | 3.3 | ±30% | 41 | 0.075 | 2,500 | 2,600 | 2,000 | 2,200 | 100 |
| LSXND6060PKT4R7MMGG | NRS6014T 4R7MMGG | RoHS | 4.7 | ±20% | 36 | 0.090 | 2,000 | 2,170 | 1,900 | 1,950 | 100 |
| LSXND6060PKT6R8MMGG | NRS6014T 6R8MMGG | RoHS | 6.8 | ±20% | 30 | 0.115 | 1,700 | 1,880 | 1,650 | 1,700 | 100 |
| LSXND6060PKT100MMGG | NRS6014T 100MMGG | RoHS | 10 | ±20% | 24 | 0.140 | 1,400 | 1,540 | 1,400 | 1,500 | 100 |
| LSXND6060PKT150MMGG | NRS6014T 150MMGG | RoHS | 15 | ±20% | 20 | 0.210 | 1,150 | 1,300 | 1,200 | 1,280 | 100 |
| LSXND6060PKT220MMGG | NRS6014T 220MMGG | RoHS | 22 | ±20% | 16 | 0.300 | 950 | 1,100 | 1,000 | 1,090 | 100 |

● 6060WK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND6060WKL0R8NMGG | NRS6020T 0R8NMGG | RoHS | 0.8 | ±30% | 110 | 0.020 | 6,400 | 7,400 | 4,100 | 4,800 | 100 |
| LSXND6060WKL1R5NMGG | NRS6020T 1R5NMGG | RoHS | 1.5 | ±30% | 93 | 0.026 | 4,300 | 5,300 | 3,600 | 4,200 | 100 |
| LSXND6060WKL2R2NMGG | NRS6020T 2R2NMGG | RoHS | 2.2 | ±30% | 73 | 0.034 | 3,200 | 4,000 | 2,900 | 3,400 | 100 |
| LSXND6060WKL3R3NMGG | NRS6020T 3R3NMGG | RoHS | 3.3 | ±30% | 55 | 0.040 | 2,800 | 3,400 | 2,750 | 3,100 | 100 |
| LSXND6060WKL4R7NMGG | NRS6020T 4R7NMGG | RoHS | 4.7 | ±30% | 43 | 0.058 | 2,400 | 2,800 | 2,150 | 2,500 | 100 |
| LSXND6060WKL6R8NMGG | NRS6020T 6R8NMGG | RoHS | 6.8 | ±30% | 30 | 0.085 | 2,000 | 2,600 | 1,800 | 2,100 | 100 |
| LSXND6060WKL100MMGG | NRS6020T 100MMGG | RoHS | 10 | ±20% | 18 | 0.125 | 1,900 | 2,240 | 1,500 | 1,700 | 100 |
| LSXND6060WKL220MMGG | NRS6020T 220MMGG | RoHS | 22 | ±20% | 11 | 0.290 | 1,250 | 1,470 | 950 | 1,100 | 100 |

● 6060WH type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND6060WHL0R9NMGG | NRS6028T 0R9NMGG | RoHS | 0.9 | ±30% | 90 | 0.013 | 6,700 | 7,900 | 4,600 | 5,200 | 100 |
| LSXND6060WHL1R5NMGG | NRS6028T 1R5NMGG | RoHS | 1.5 | ±30% | 78 | 0.016 | 5,100 | 6,100 | 4,200 | 4,700 | 100 |
| LSXND6060WHL2R2NMGG | NRS6028T 2R2NMGG | RoHS | 2.2 | ±30% | 68 | 0.020 | 4,200 | 5,100 | 3,700 | 4,200 | 100 |
| LSXND6060WHL3R0NMGG | NRS6028T 3R0NMGG | RoHS | 3.0 | ±30% | 55 | 0.023 | 3,600 | 4,300 | 3,400 | 3,900 | 100 |
| LSXND6060WHL4R7MMGG | NRS6028T 4R7MMGG | RoHS | 4.7 | ±20% | 39 | 0.031 | 2,700 | 3,300 | 3,000 | 3,400 | 100 |
| LSXND6060WHL6R8MMGG | NRS6028T 6R8MMGG | RoHS | 6.8 | ±20% | 25 | 0.043 | 2,600 | 3,000 | 2,500 | 2,900 | 100 |
| LSXND6060WHL100MMGG | NRS6028T 100MMGG | RoHS | 10 | ±20% | 20 | 0.065 | 1,900 | 2,200 | 1,900 | 2,200 | 100 |
| LSXND6060WHL150MMGG | NRS6028T 150MMGG | RoHS | 15 | ±20% | 17 | 0.095 | 1,600 | 1,900 | 1,800 | 1,900 | 100 |
| LSXND6060WHL220MMGG | NRS6028T 220MMGG | RoHS | 22 | ±20% | 12 | 0.135 | 1,300 | 1,600 | 1,400 | 1,600 | 100 |
| LSXND6060WHL330MMGG | NRS6028T 330MMGG | RoHS | 33 | ±20% | 10 | 0.220 | 1,100 | 1,300 | 1,100 | 1,250 | 100 |
| LSXND6060WHL470MMGG | NRS6028T 470MMGG | RoHS | 47 | ±20% | 8 | 0.300 | 1,000 | 1,150 | 920 | 1,050 | 100 |
| LSXND6060WHL680MMGG | NRS6028T 680MMGG | RoHS | 68 | ±20% | 5 | 0.420 | 800 | 950 | 770 | 880 | 100 |
| LSXND6060WHL101MMGG | NRS6028T 101MMGG | RoHS | 100 | ±20% | 3 | 0.600 | 650 | 750 | 660 | 750 | 100 |

● 6060YE type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|---------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|--------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXND6060YEL1R0NMGG | NRS6045T 1R0NMGG | RoHS | 1.0 | ±30% | 110 | 0.014 | 9,800 | 11,000 | 4,500 | 5,200 | 100 |
| LSXND6060YEL1R3NMGG | NRS6045T 1R3NMGG | RoHS | 1.3 | ±30% | 95 | 0.016 | 8,200 | 9,300 | 4,200 | 4,800 | 100 |
| LSXND6060YEL1R5NMGG | NRS6045T 1R5NMGG | RoHS | 1.5 | ±30% | 95 | 0.016 | 8,200 | 9,300 | 4,200 | 4,800 | 100 |
| LSXND6060YEL1R8NMGG | NRS6045T 1R8NMGG | RoHS | 1.8 | ±30% | 80 | 0.019 | 7,200 | 8,100 | 3,900 | 4,400 | 100 |
| LSXND6060YEL2R2NMGG | NRS6045T 2R2NMGG | RoHS | 2.2 | ±30% | 60 | 0.022 | 6,400 | 7,300 | 3,600 | 4,100 | 100 |
| LSXND6060YEL2R3NMGG | NRS6045T 2R3NMGG | RoHS | 2.3 | ±30% | 60 | 0.022 | 6,400 | 7,300 | 3,600 | 4,100 | 100 |
| LSXND6060YEL3R0NMGG | NRS6045T 3R0NMGG | RoHS | 3.0 | ±30% | 45 | 0.024 | 5,600 | 6,500 | 3,300 | 4,000 | 100 |
| LSXND6060YEL3R3NMGG | NRS6045T 3R3NMGG | RoHS | 3.3 | ±30% | 45 | 0.024 | 5,600 | 6,500 | 3,300 | 4,000 | 100 |
| LSXND6060YEL4R5MMGG | NRS6045T 4R5MMGG | RoHS | 4.5 | ±20% | 25 | 0.030 | 4,400 | 5,400 | 3,100 | 3,600 | 100 |
| LSXND6060YEL4R7NMGG | NRS6045T 4R7NMGG | RoHS | 4.7 | ±30% | 25 | 0.030 | 4,400 | 5,400 | 3,100 | 3,600 | 100 |
| LSXND6060YEL6R3MMGG | NRS6045T 6R3MMGG | RoHS | 6.3 | ±20% | 15 | 0.036 | 3,600 | 4,300 | 3,000 | 3,300 | 100 |
| LSXND6060YEL6R8MMGG | NRS6045T 6R8MMGG | RoHS | 6.8 | ±20% | 15 | 0.036 | 3,600 | 4,300 | 3,000 | 3,300 | 100 |
| LSXND6060YEL100MMGG | NRS6045T 100MMGG | RoHS | 10 | ±20% | 12 | 0.046 | 3,100 | 3,600 | 2,400 | 2,800 | 100 |
| LSXND6060YEL150MMGG | NRS6045T 150MMGG | RoHS | 15 | ±20% | 10 | 0.070 | 2,500 | 3,000 | 1,900 | 2,300 | 100 |
| LSXND6060YEL220MMGG | NRS6045T 220MMGG | RoHS | 22 | ±20% | 7 | 0.107 | 2,000 | 2,400 | 1,600 | 1,900 | 100 |
| LSXND6060YEL330MMGG | NRS6045T 330MMGG | RoHS | 33 | ±20% | 6 | 0.141 | 1,650 | 2,000 | 1,400 | 1,600 | 100 |
| LSXND6060YEL470MMGG | NRS6045T 470MMGG | RoHS | 47 | ±20% | 5 | 0.211 | 1,400 | 1,600 | 1,150 | 1,350 | 100 |
| LSXND6060YEL680MMGG | NRS6045T 680MMGG | RoHS | 68 | ±20% | 4 | 0.304 | 1,100 | 1,300 | 950 | 1,100 | 100 |
| LSXND6060YEL101MMGG | NRS6045T 101MMGG | RoHS | 100 | ±20% | 3 | 0.466 | 900 | 1,200 | 750 | 900 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ PART NUMBER

● 8080XK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|-------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXNH8080XKL1R0NJG | NRS8030T 1R0NJGJ | RoHS | 1.0 | ±30% | 120 | 0.009 | 7,800 | 9,300 | 6,200 | 7,600 | 100 |
| LSXNH8080XKL1R5NJG | NRS8030T 1R5NJGJ | RoHS | 1.5 | ±30% | 80 | 0.012 | 6,200 | 7,800 | 5,300 | 6,400 | 100 |
| LSXNH8080XKL2R2NJG | NRS8030T 2R2NJGJ | RoHS | 2.2 | ±30% | 60 | 0.015 | 4,900 | 6,100 | 4,800 | 5,600 | 100 |
| LSXNH8080XKL3R3MJG | NRS8030T 3R3MJGJ | RoHS | 3.3 | ±20% | 50 | 0.019 | 4,200 | 5,200 | 4,300 | 5,100 | 100 |
| LSXNH8080XKL4R7MJG | NRS8030T 4R7MJGJ | RoHS | 4.7 | ±20% | 40 | 0.022 | 3,600 | 4,400 | 4,000 | 4,700 | 100 |
| LSXNH8080XKL6R8MJG | NRS8030T 6R8MJGJ | RoHS | 6.8 | ±20% | 32 | 0.029 | 3,000 | 3,600 | 3,400 | 4,000 | 100 |
| LSXNH8080XKL100MJG | NRS8030T 100MJGJ | RoHS | 10 | ±20% | 27 | 0.033 | 2,400 | 2,900 | 3,000 | 3,600 | 100 |
| LSXNH8080XKL150MJG | NRS8030T 150MJGJ | RoHS | 15 | ±20% | 20 | 0.060 | 2,000 | 2,300 | 2,200 | 2,600 | 100 |
| LSXNH8080XKL220MJG | NRS8030T 220MJGJ | RoHS | 22 | ±20% | 16 | 0.070 | 1,750 | 2,200 | 1,900 | 2,300 | 100 |
| LSXNH8080XKL330MJG | NRS8030T 330MJGJ | RoHS | 33 | ±20% | 13 | 0.120 | 1,300 | 1,600 | 1,500 | 1,800 | 100 |
| LSXNH8080XKL470MJG | NRS8030T 470MJGJ | RoHS | 47 | ±20% | 11 | 0.170 | 1,100 | 1,400 | 1,300 | 1,500 | 100 |

● 8080YB/8080YK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | | | Measuring frequency [kHz] |
|--------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|--------|--------------------------------|-------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | | Temperature rise current: Idc2 | | |
| | | | | | | | Max. | Typ. | Max. | Typ. | |
| LSXNH8080YBL0R9NJG | NRS8040T 0R9NJGJ | RoHS | 0.9 | ±30% | 85 | 0.006 | 13,000 | 14,000 | 7,800 | 9,600 | 100 |
| LSXNH8080YBL1R0NJG | NRS8040T 1R0NJGJ | RoHS | 1 | ±30% | 85 | 0.006 | 13,000 | 14,000 | 7,800 | 9,600 | 100 |
| LSXNH8080YBL1R4NJG | NRS8040T 1R4NJGJ | RoHS | 1.4 | ±30% | 63 | 0.007 | 10,000 | 11,000 | 7,000 | 8,400 | 100 |
| LSXNH8080YBL1R5NJG | NRS8040T 1R5NJGJ | RoHS | 1.5 | ±30% | 63 | 0.007 | 10,000 | 11,000 | 7,000 | 8,400 | 100 |
| LSXNH8080YBL2R0NJG | NRS8040T 2R0NJGJ | RoHS | 2.0 | ±30% | 50 | 0.009 | 8,100 | 9,200 | 6,300 | 7,600 | 100 |
| LSXNH8080YBL2R2NJG | NRS8040T 2R2NJGJ | RoHS | 2.2 | ±30% | 50 | 0.009 | 8,100 | 9,200 | 6,300 | 7,600 | 100 |
| LSXNH8080YBL3R3NJG | NRS8040T 3R3NJGJ | RoHS | 3.3 | ±30% | 34 | 0.015 | 6,400 | 6,800 | 4,900 | 6,000 | 100 |
| LSXNH8080YBL3R6NJG | NRS8040T 3R6NJGJ | RoHS | 3.6 | ±30% | 34 | 0.015 | 6,400 | 6,800 | 4,900 | 6,000 | 100 |
| LSXNH8080YBL4R7NJG | NRS8040T 4R7NJGJ | RoHS | 4.7 | ±30% | 30 | 0.018 | 5,400 | 5,900 | 4,100 | 5,200 | 100 |
| LSXNH8080YBL6R8NJG | NRS8040T 6R8NJGJ | RoHS | 6.8 | ±30% | 24 | 0.025 | 4,400 | 4,800 | 3,700 | 4,400 | 100 |
| LSXNH8080YKL100MJG | NRS8040T 100MJGJ | RoHS | 10 | ±20% | 22 | 0.034 | 3,800 | 4,100 | 3,100 | 3,500 | 100 |
| LSXNH8080YKL150MJG | NRS8040T 150MJGJ | RoHS | 15 | ±20% | 16 | 0.050 | 2,900 | 3,200 | 2,400 | 3,000 | 100 |
| LSXNH8080YKL220MJG | NRS8040T 220MJGJ | RoHS | 22 | ±20% | 13 | 0.066 | 2,400 | 2,700 | 2,200 | 2,600 | 100 |
| LSXNH8080YKL330MJG | NRS8040T 330MJGK | RoHS | 33 | ±20% | 12 | 0.100 | 2,000 | 2,300 | 1,700 | 1,900 | 100 |
| LSXNH8080YKL470MJG | NRS8040T 470MJGK | RoHS | 47 | ±20% | 8 | 0.140 | 1,500 | 1,800 | 1,500 | 1,600 | 100 |
| LSXNH8080YKL680MJG | NRS8040T 680MJGK | RoHS | 68 | ±20% | 7 | 0.210 | 1,300 | 1,500 | 1,200 | 1,300 | 100 |
| LSXNH8080YKL101MJG | NRS8040T 101MJGK | RoHS | 100 | ±20% | 6 | 0.280 | 1,100 | 1,300 | 1,000 | 1,100 | 100 |
| LSXNH8080YKL151MJG | NRS8040T 151MJGK | RoHS | 150 | ±20% | 5 | 0.420 | 900 | 980 | 800 | 890 | 100 |
| LSXNH8080YKL221MJG | NRS8040T 221MJGK | RoHS | 220 | ±20% | 4 | 0.620 | 700 | 800 | 670 | 740 | 100 |

● 3030KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|--------------------------------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | Temperature rise current: Idc2 | |
| | | | | | | | Max. | Max. | |
| LSXBD3030KKT1R0N | NR 3010T 1R0N | RoHS | 1.0 | ±30% | 126 | 0.065 | 1,300 | 1,400 | 100 |
| LSXBD3030KKT1R5N | NR 3010T 1R5N | RoHS | 1.5 | ±30% | 98 | 0.080 | 1,200 | 1,300 | 100 |
| LSXBD3030KKT2R2M | NR 3010T 2R2M | RoHS | 2.2 | ±20% | 82 | 0.095 | 1,100 | 1,100 | 100 |
| LSXBD3030KKT3R3M | NR 3010T 3R3M | RoHS | 3.3 | ±20% | 63 | 0.140 | 870 | 940 | 100 |
| LSXBD3030KKT4R7M | NR 3010T 4R7M | RoHS | 4.7 | ±20% | 56 | 0.190 | 750 | 780 | 100 |
| LSXBD3030KKT6R8M | NR 3010T 6R8M | RoHS | 6.8 | ±20% | 46 | 0.300 | 610 | 630 | 100 |
| LSXBD3030KKT100M | NR 3010T 100M | RoHS | 10 | ±20% | 35 | 0.450 | 500 | 510 | 100 |
| LSXBD3030KKT150M | NR 3010T 150M | RoHS | 15 | ±20% | 30 | 0.740 | 400 | 400 | 100 |
| LSXBD3030KKT220M | NR 3010T 220M | RoHS | 22 | ±20% | 25 | 1.03 | 350 | 350 | 100 |
| LSXBD3030KKT330M | NR 3010T 330M | RoHS | 33 | ±20% | 20 | 1.55 | 260 | 275 | 100 |
| LSXBD3030KKT470M | NR 3010T 470M | RoHS | 47 | ±20% | 17 | 2.05 | 220 | 235 | 100 |

● 3030MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±20%) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|--------------------------|--------------------------------|---------------------------------|
| | | | | | | | Saturation current: Idc1 | Temperature rise current: Idc2 | |
| | | | | | | | Max. | Max. | |
| LSXBD3030MKT1R0N | NR 3012T 1R0N | RoHS | 1.0 | ±30% | 110 | 0.050 | 1,500 | 1,490 | 100 |
| LSXBD3030MKT1R5N | NR 3012T 1R5N | RoHS | 1.5 | ±30% | 92 | 0.060 | 1,360 | 1,400 | 100 |
| LSXBD3030MKT2R2M | NR 3012T 2R2M | RoHS | 2.2 | ±20% | 70 | 0.080 | 1,100 | 1,200 | 100 |
| LSXBD3030MKT3R3M | NR 3012T 3R3M | RoHS | 3.3 | ±20% | 55 | 0.100 | 910 | 1,050 | 100 |
| LSXBD3030MKT4R7M | NR 3012T 4R7M | RoHS | 4.7 | ±20% | 48 | 0.130 | 770 | 980 | 100 |
| LSXBD3030MKT6R8M | NR 3012T 6R8M | RoHS | 6.8 | ±20% | 40 | 0.190 | 670 | 740 | 100 |
| LSXBD3030MKT100M | NR 3012T 100M | RoHS | 10 | ±20% | 32 | 0.290 | 540 | 630 | 100 |
| LSXBD3030MKT150M | NR 3012T 150M | RoHS | 15 | ±20% | 27 | 0.450 | 440 | 485 | 100 |
| LSXBD3030MKT220M | NR 3012T 220M | RoHS | 22 | ±20% | 22 | 0.630 | 375 | 420 | 100 |
| LSXBD3030MKT330M | NR 3012T 330M | RoHS | 33 | ±20% | 19 | 1.03 | 310 | 330 | 100 |
| LSXBD3030MKT470M | NR 3012T 470M | RoHS | 47 | ±20% | 17 | 1.45 | 250 | 280 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

PART NUMBER

● 3030QK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 20\%$) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------------|--|---------------------------------|
| | | | | | | | Saturation current: Idc1 Max. | Temperature rise current: Idc2 Max. | |
| LSXBD3030QKT1R0N | NR 3015T 1R0N | RoHS | 1.0 | $\pm 30\%$ | 100 | 0.030 | 2,100 | 2,100 | 100 |
| LSXBD3030QKT1R5N | NR 3015T 1R5N | RoHS | 1.5 | $\pm 30\%$ | 87 | 0.040 | 1,800 | 1,820 | 100 |
| LSXBD3030QKT2R2M | NR 3015T 2R2M | RoHS | 2.2 | $\pm 20\%$ | 64 | 0.060 | 1,480 | 1,500 | 100 |
| LSXBD3030QKT3R3M | NR 3015T 3R3M | RoHS | 3.3 | $\pm 20\%$ | 49 | 0.080 | 1,210 | 1,230 | 100 |
| LSXBD3030QKT4R7M | NR 3015T 4R7M | RoHS | 4.7 | $\pm 20\%$ | 40 | 0.120 | 1,020 | 1,040 | 100 |
| LSXBD3030QKT6R8M | NR 3015T 6R8M | RoHS | 6.8 | $\pm 20\%$ | 36 | 0.160 | 870 | 880 | 100 |
| LSXBD3030QKT100M | NR 3015T 100M | RoHS | 10 | $\pm 20\%$ | 28 | 0.230 | 700 | 710 | 100 |
| LSXBD3030QKT150M | NR 3015T 150M | RoHS | 15 | $\pm 20\%$ | 23 | 0.360 | 560 | 560 | 100 |
| LSXBD3030QKT220M | NR 3015T 220M | RoHS | 22 | $\pm 20\%$ | 20 | 0.520 | 470 | 470 | 100 |
| LSXBD3030QKT330M | NR 3015T 330M | RoHS | 33 | $\pm 20\%$ | 18 | 0.840 | 390 | 370 | 100 |
| LSXBD3030QKT470M | NR 3015T 470M | RoHS | 47 | $\pm 20\%$ | 17 | 1.34 | 320 | 300 | 100 |

● 4040KK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 20\%$) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------------|--|---------------------------------|
| | | | | | | | Saturation current: Idc1 Max. | Temperature rise current: Idc2 Max. | |
| LSXBD4040KKL1R0N | NR 4010T 1R0N | RoHS | 1.0 | $\pm 30\%$ | 116 | 0.100 | 1,800 | 1,050 | 100 |
| LSXBD4040KKL2R2N | NR 4010T 2R2N | RoHS | 2.2 | $\pm 30\%$ | 73 | 0.150 | 1,150 | 890 | 100 |
| LSXBD4040KKL3R3M | NR 4010T 3R3M | RoHS | 3.3 | $\pm 20\%$ | 58 | 0.180 | 1,100 | 820 | 100 |
| LSXBD4040KKL4R7M | NR 4010T 4R7M | RoHS | 4.7 | $\pm 20\%$ | 47 | 0.210 | 900 | 750 | 100 |
| LSXBD4040KKL6R8M | NR 4010T 6R8M | RoHS | 6.8 | $\pm 20\%$ | 38 | 0.300 | 740 | 620 | 100 |
| LSXBD4040KKL100M | NR 4010T 100M | RoHS | 10 | $\pm 20\%$ | 31 | 0.380 | 560 | 600 | 100 |
| LSXBD4040KKL150M | NR 4010T 150M | RoHS | 15 | $\pm 20\%$ | 24 | 0.510 | 470 | 510 | 100 |
| LSXBD4040KKL220M | NR 4010T 220M | RoHS | 22 | $\pm 20\%$ | 19 | 0.870 | 360 | 400 | 100 |
| LSXBD4040KKL330M | NR 4010T 330M | RoHS | 33 | $\pm 20\%$ | 15 | 1.54 | 280 | 300 | 100 |
| LSXBD4040KKL470M | NR 4010T 470M | RoHS | 47 | $\pm 20\%$ | 13 | 1.81 | 240 | 280 | 100 |

● 4040MK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 20\%$) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------------|--|---------------------------------|
| | | | | | | | Saturation current: Idc1 Max. | Temperature rise current: Idc2 Max. | |
| LSXBD4040MKL1R0N | NR 4012T 1R0N | RoHS | 1.0 | $\pm 30\%$ | 131 | 0.060 | 2,500 | 1,500 | 100 |
| LSXBD4040MKL2R2M | NR 4012T 2R2M | RoHS | 2.2 | $\pm 20\%$ | 66 | 0.090 | 1,650 | 1,200 | 100 |
| LSXBD4040MKL3R3M | NR 4012T 3R3M | RoHS | 3.3 | $\pm 20\%$ | 50 | 0.130 | 1,200 | 980 | 100 |
| LSXBD4040MKL4R7M | NR 4012T 4R7M | RoHS | 4.7 | $\pm 20\%$ | 45 | 0.140 | 1,050 | 960 | 100 |
| LSXBD4040MKL6R8M | NR 4012T 6R8M | RoHS | 6.8 | $\pm 20\%$ | 35 | 0.180 | 900 | 840 | 100 |
| LSXBD4040MKL100M | NR 4012T 100M | RoHS | 10 | $\pm 20\%$ | 28 | 0.240 | 740 | 770 | 100 |
| LSXBD4040MKL150M | NR 4012T 150M | RoHS | 15 | $\pm 20\%$ | 23 | 0.400 | 560 | 600 | 100 |
| LSXBD4040MKL220M | NR 4012T 220M | RoHS | 22 | $\pm 20\%$ | 18 | 0.480 | 510 | 540 | 100 |
| LSXBD4040MKL330M | NR 4012T 330M | RoHS | 33 | $\pm 20\%$ | 15 | 0.810 | 400 | 420 | 100 |
| LSXBD4040MKL470M | NR 4012T 470M | RoHS | 47 | $\pm 20\%$ | 12 | 1.00 | 350 | 370 | 100 |

● 4040TK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 20\%$) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------------|--|---------------------------------|
| | | | | | | | Saturation current: Idc1 Max. | Temperature rise current: Idc2 Max. | |
| LSXBD4040TKL1R0N | NR 4018T 1R0N | RoHS | 1.0 | $\pm 30\%$ | 80 | 0.030 | 4,000 | 1,830 | 100 |
| LSXBD4040TKL2R2M | NR 4018T 2R2M | RoHS | 2.2 | $\pm 20\%$ | 52 | 0.060 | 2,700 | 1,440 | 100 |
| LSXBD4040TKL3R3M | NR 4018T 3R3M | RoHS | 3.3 | $\pm 20\%$ | 44 | 0.070 | 2,000 | 1,230 | 100 |
| LSXBD4040TKL4R7M | NR 4018T 4R7M | RoHS | 4.7 | $\pm 20\%$ | 34 | 0.090 | 1,700 | 1,200 | 100 |
| LSXBD4040TKL6R8M | NR 4018T 6R8M | RoHS | 6.8 | $\pm 20\%$ | 29 | 0.110 | 1,450 | 1,060 | 100 |
| LSXBD4040TKL100M | NR 4018T 100M | RoHS | 10 | $\pm 20\%$ | 24 | 0.180 | 1,200 | 840 | 100 |
| LSXBD4040TKL150M | NR 4018T 150M | RoHS | 15 | $\pm 20\%$ | 19 | 0.250 | 940 | 650 | 100 |
| LSXBD4040TKL220M | NR 4018T 220M | RoHS | 22 | $\pm 20\%$ | 16 | 0.360 | 800 | 590 | 100 |
| LSXBD4040TKL330M | NR 4018T 330M | RoHS | 33 | $\pm 20\%$ | 12 | 0.530 | 650 | 490 | 100 |
| LSXBD4040TKL470M | NR 4018T 470M | RoHS | 47 | $\pm 20\%$ | 10 | 0.650 | 570 | 420 | 100 |
| LSXBD4040TKL680M | NR 4018T 680M | RoHS | 68 | $\pm 20\%$ | 8.3 | 1.00 | 470 | 320 | 100 |
| LSXBD4040TKL101M | NR 4018T 101M | RoHS | 100 | $\pm 20\%$ | 6.5 | 1.50 | 400 | 270 | 100 |
| LSXBD4040TKL151M | NR 4018T 151M | RoHS | 150 | $\pm 20\%$ | 5.5 | 2.50 | 310 | 220 | 100 |
| LSXBD4040TKL221M | NR 4018T 221M | RoHS | 220 | $\pm 20\%$ | 4.0 | 4.00 | 270 | 170 | 100 |

● 5050YA/5050YK type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 20\%$) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------------|--|---------------------------------|
| | | | | | | | Saturation current: Idc1 Max. | Temperature rise current: Idc2 Max. | |
| LSXBD5050YAL1R5N | NR 5040T 1R5N | RoHS | 1.5 | $\pm 30\%$ | 60 | 0.020 | 6,000 | 3,600 | 100 |
| LSXBD5050YAL2R2N | NR 5040T 2R2N | RoHS | 2.2 | $\pm 30\%$ | 42 | 0.022 | 4,600 | 3,500 | 100 |
| LSXBD5050YAL3R3N | NR 5040T 3R3N | RoHS | 3.3 | $\pm 30\%$ | 32 | 0.027 | 3,800 | 3,300 | 100 |
| LSXBD5050YAL4R7N | NR 5040T 4R7N | RoHS | 4.7 | $\pm 30\%$ | 28 | 0.029 | 3,300 | 3,100 | 100 |
| LSXBD5050YAL6R8M | NR 5040T 6R8M | RoHS | 6.8 | $\pm 20\%$ | 21 | 0.049 | 2,600 | 2,300 | 100 |
| LSXBD5050YAL100M | NR 5040T 100M | RoHS | 10 | $\pm 20\%$ | 18 | 0.056 | 2,300 | 2,100 | 100 |
| LSXBD5050YKL150M | NR 5040T 150M | RoHS | 15 | $\pm 20\%$ | 13 | 0.080 | 2,000 | 1,800 | 100 |
| LSXBD5050YKL220M | NR 5040T 220M | RoHS | 22 | $\pm 20\%$ | 9 | 0.126 | 1,600 | 1,400 | 100 |
| LSXBD5050YKL330M | NR 5040T 330M | RoHS | 33 | $\pm 20\%$ | 7 | 0.180 | 1,300 | 1,200 | 100 |
| LSXBD5050YKL470M | NR 5040T 470M | RoHS | 47 | $\pm 20\%$ | 6 | 0.310 | 1,100 | 900 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

Wire-wound Ferrite Power Inductors LSXB/LSXN/LSXP/LCXN/LCXP/LBXN/LBXP/
 LLXB/LLXN/LLXP/LMXN/LMXP series
 Wire-wound Ferrite Power Inductors LCXH/LBXH/LMXH series
 Wire-wound Ferrite Inductors for Class D Amplifier LCXA

■ PACKAGING


① Minimum Quantity

| Type | Standard Quantity [pcs] |
|--------|-------------------------|
| | Tape & Reel |
| 2020KK | 2500 |
| 2020MK | 2500 |
| 2424KK | 2500 |
| 2424MK | 2500 |
| 3030KK | 2000 |
| 3030MK | 2000 |
| 3030QK | 2000 |
| 4040KK | 5000 |
| 4040MK | 4500 |
| 4040TK | 3500 |
| 4040WK | 700 |

| Type | Standard Quantity [pcs] |
|--------|-------------------------|
| | Tape & Reel |
| 5050KK | 1000 |
| 5050MK | 1000 |
| 5050PK | 1000 |
| 5050WB | 800 |
| 5050WK | 800 |
| 5050WD | 2500 |
| 5050WE | 2500 |
| 5050XK | 500 |
| 5050XA | 500 |
| 5050YA | 1500 |
| 5050YK | 1500 |
| 6060KK | 1000 |
| 6060MK | 1000 |
| 6060PK | 1000 |
| 6060WK | 2500 |
| 6060WH | 2000 |
| 6060YE | 1500 |
| 8080XK | 1000 |
| 8080YK | 1000 |
| 8080YB | 1000 |


② Tape Material

● Embossed Tape

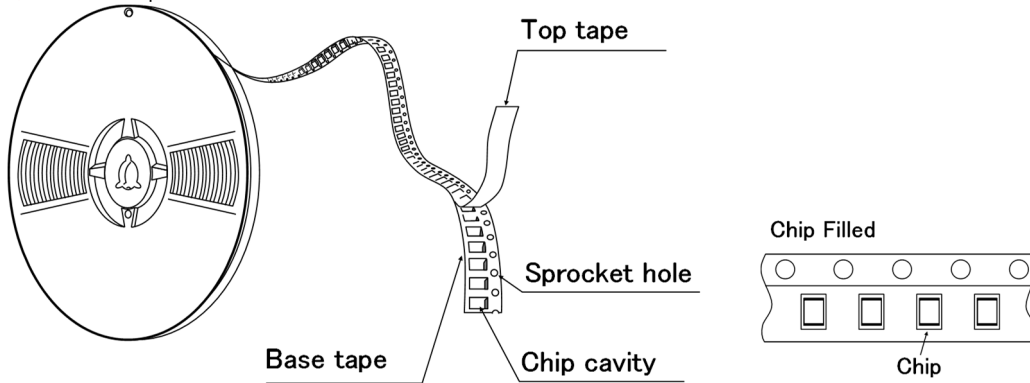

③ Taping dimensions

● Embossed tape 8mm wide (0.315 inches wide)

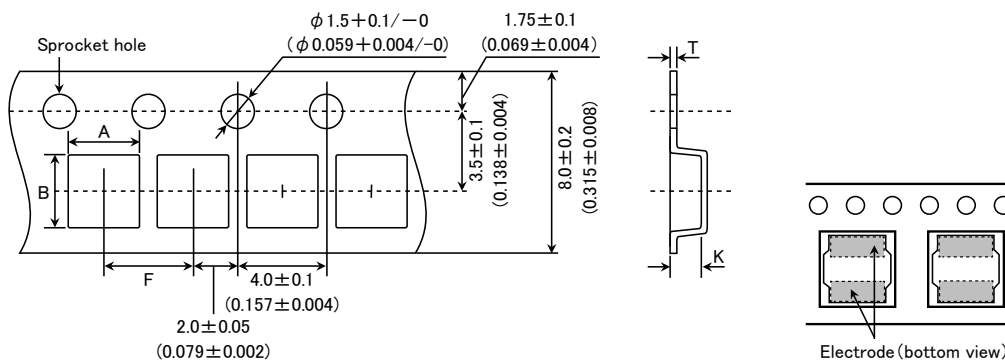


▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| Type | Chip cavity | | Insertion pitch F | Tape thickness | |
|------------------|--------------------------|--------------------------|--------------------------|----------------------------|--------------------------|
| | A | B | | T | K |
| 2020KK 2020MK | 2.2±0.1 (0.102±0.004) | 2.2±0.1 (0.102±0.004) | 4.0±0.1 (0.157±0.004) | 0.25±0.05 (0.009±0.002) | 1.3±0.1 (0.051±0.004) |
| 2424KK 2424MK | 2.6±0.1 (0.087±0.004) | 2.6±0.1 (0.102±0.004) | | 0.25±0.05 (0.009±0.002) | 1.3±0.1 (0.051±0.004) |
| 3030KK | 3.2±0.1 (0.126±0.004) | 3.2±0.1 (0.126±0.004) | | 0.3±0.05 (0.012±0.002) | 1.4±0.1 (0.055±0.004) |
| 3030MK | | | | | 1.6±0.1 (0.063±0.004) |
| 3030QK | | | | | 1.9±0.1 (0.075±0.004) |

Unit: mm (inch)

● Embossed tape 12mm wide (0.47 inches wide)

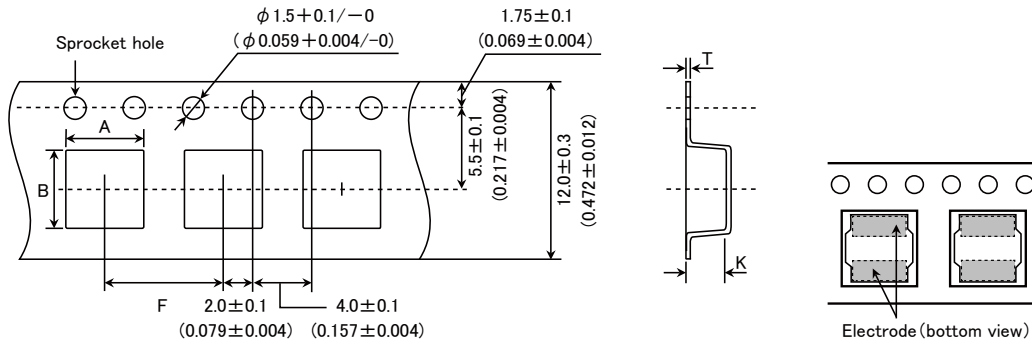


| Type | Chip cavity | | Insertion pitch F | Tape thickness | |
|------------------|---------------------------|---------------------------|--------------------------|--------------------------|--------------------------|
| | A | B | | T | K |
| 4040KK | 4.3±0.1 (0.169±0.004) | 4.3±0.1 (0.169±0.004) | 8.0±0.1 (0.315±0.004) | 0.3±0.1 (0.012±0.004) | 1.4±0.1 (0.055±0.004) |
| 4040MK | | | | | 1.6±0.1 (0.063±0.004) |
| 4040TK 4040WK | | | | | 2.1±0.1 (0.083±0.004) |
| 5050KK | 1.4±0.1 (0.055±0.004) | | | | |
| 5050MK | 1.4±0.1 (0.055±0.004) | | | | |
| 5050PK | 1.6±0.1 (0.063±0.004) | | | | |
| 5050WB 5050WK | 2.3±0.1 (0.091±0.004) | | | | |
| 5050WD 5050WE | 2.7±0.1 (0.106±0.004) | | | | |
| 5050XK 5050XA | 5.15±0.1 (0.203±0.004) | 5.15±0.1 (0.203±0.004) | | 0.4±0.1 (0.016±0.004) | 3.2±0.1 (0.126±0.004) |
| 5050YK 5050YA | 5.15±0.1 (0.203±0.004) | 5.15±0.1 (0.203±0.004) | | | 4.2±0.1 (0.165±0.004) |
| 6060KK | 6.3±0.1 (0.248±0.004) | 6.3±0.1 (0.248±0.004) | 1.4±0.1 (0.055±0.004) | | |
| 6060MK | | | | | 1.6±0.1 (0.063±0.004) |
| 6060PK | | | | | 1.6±0.1 (0.063±0.004) |
| 6060WK | | | | | 2.3±0.1 (0.090±0.004) |
| 6060WH | | | | | 3.1±0.1 (0.122±0.004) |
| 6060YE | | | | | 4.7±0.1 (0.185±0.004) |
| | | | | | 4.7±0.1 (0.185±0.004) |

Unit: mm (inch)

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


● Embossed tape 16mm wide (0.63 inches wide)

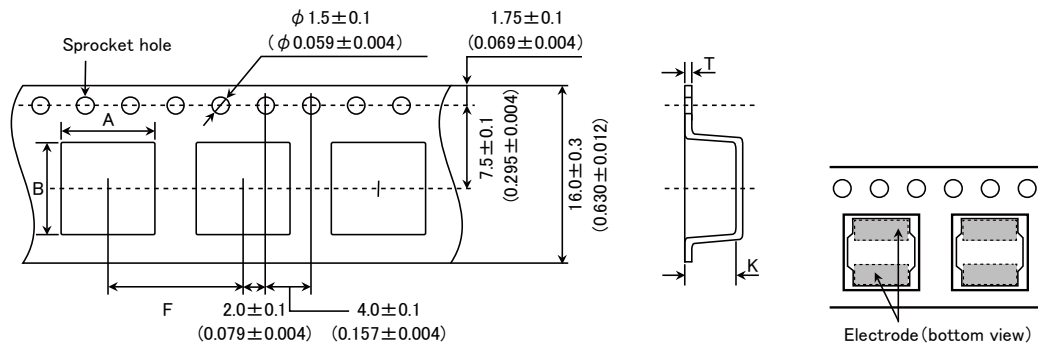


| Type | Chip cavity | | Insertion pitch F | Tape thickness | |
|--------|--------------------------|--------------------------|---------------------------|--------------------------|--------------------------|
| | A | B | | T | K |
| 8080XK | 8.3±0.1 (0.327±0.004) | 8.3±0.1 (0.327±0.004) | 12.0±0.1 (0.472±0.004) | 0.5±0.1 (0.020±0.004) | 3.4±0.1 (0.134±0.004) |
| 8080YK | | | | | 4.5±0.1 (0.177±0.004) |
| 8080YB | | | | | 4.5±0.1 (0.177±0.004) |

Unit : mm (inch)

④ Leader and Blank portion

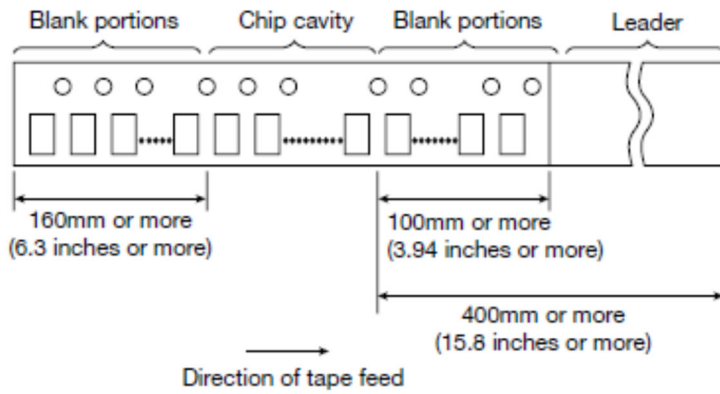


⑤ Reel size

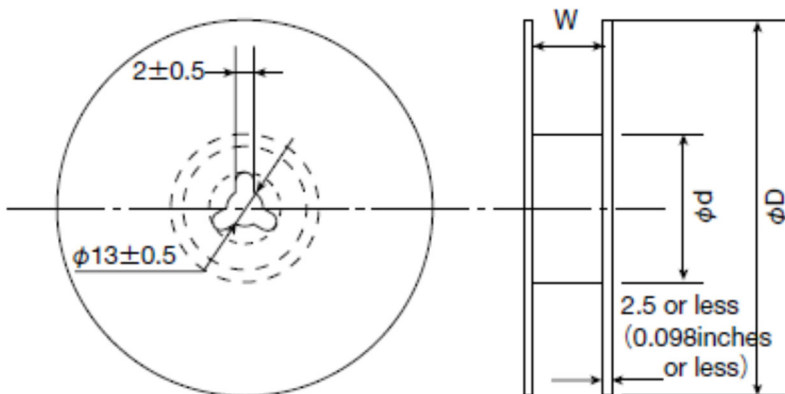

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| Type | Reel size (Reference values) | | |
|--------|------------------------------|-----------------------|---------------------------|
| | ϕD | ϕd | W |
| 2020KK | 180±0.5 (7.087±0.019) | 60±1.0 (2.36±0.04) | 10.0±1.5 (0.394±0.059) |
| 2020MK | | | |
| 2424KK | | | |
| 2424MK | | | |
| 3030KK | | | |
| 3030MK | | | |
| 3030QK | | | |
| 4040WK | 180±3.0 (7.087±0.118) | 60±2.0 (2.36±0.08) | 14.0±1.5 (0.551±0.059) |
| 5050KK | | | |
| 5050MK | | | |
| 5050PK | | | |
| 5050WB | | | |
| 5050WK | | | |
| 5050XK | | | |
| 5050XA | | | |
| 6060KK | | | |
| 6060MK | | | |
| 6060PK | | | |

Unit: mm (inch)

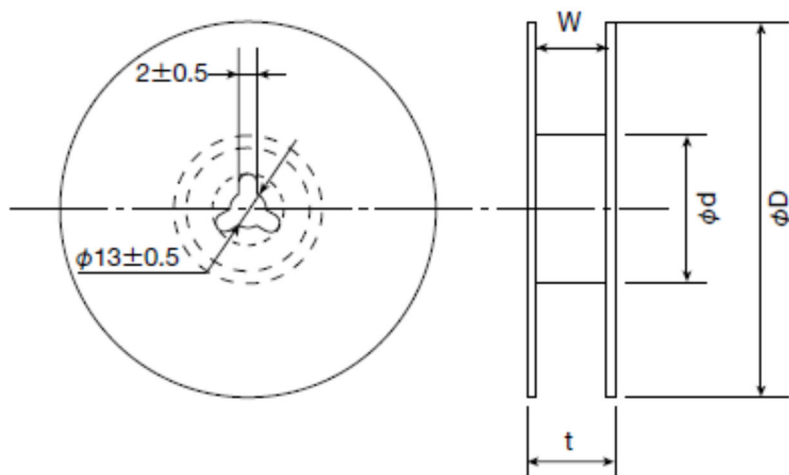


| Type | Reel size (Reference values) | | | |
|--------|------------------------------|--------------------------|----------------|--------------------------|
| | ϕD | ϕd | t (max.) | W |
| 4040KK | 330±3.0 (12.99±0.118) | 80±2.0 (3.15±0.078) | 18.5 (0.72) | 13.5±1.0 (0.531±0.04) |
| 4040MK | | | | |
| 4040TK | | | | |
| 5050WD | | | | |
| 5050WE | | | | |
| 5050YA | | | | |
| 5050YK | | | 22.5 (0.89) | 17.5±1.0 (0.689±0.04) |
| 6060WK | | | | |
| 6060WH | | | | |
| 6060YE | | | | |
| 8080XK | 22.5 (0.89) | 17.5±1.0 (0.689±0.04) | | |
| 8080YK | | | | |
| 8080YB | | | | |

Unit: mm (inch)

⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.3N in the direction of the arrow as illustrated below.

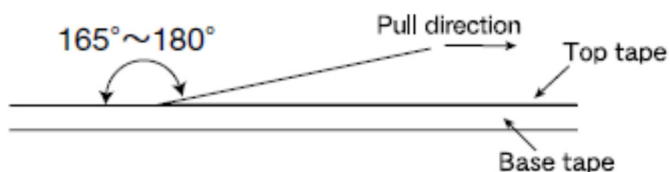



**Wire-wound Ferrite Power Inductors LSXB/LSXN/LSXP series
for General Electronic Equipment for Consumer**
**Wire-wound Ferrite Power Inductors LLXB/LLXN/LLXP series
for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)**

■ RELIABILITY DATA

| 1. Operating Temperature Range | | | | | | | | | | | | | |
|--------------------------------|--|------|------------------|---|----|---|-------------------------------|---|---------------------------|---|-------------------------------|---|----|
| Specified Value | -25~+120°C (LSXB: 3030~8080 type, LSXN: 2020~3030 type, LSXP: 2020~3030 type) -25~+125°C (LSXN: 4040~8080 type) -25~+120°C (LLXB: 3030~8080 type, LLXN: 2020~3030 type, LLXP: 2020~3030 type) -25~+125°C (LLXN: 4040~8080 type) | | | | | | | | | | | | |
| Test Methods and Remarks | Including self-generated heat | | | | | | | | | | | | |
| 2. Storage Temperature Range | | | | | | | | | | | | | |
| Specified Value | -40~+85°C | | | | | | | | | | | | |
| Test Methods and Remarks | -5 to 40°C for the product with taping. | | | | | | | | | | | | |
| 3. Rated current | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| 4. Inductance | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : LCR Meter (HP 4285A or equivalent) Measuring frequency : 100kHz, 1V | | | | | | | | | | | | |
| 5. DC Resistance | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent) | | | | | | | | | | | | |
| 6. Self resonance frequency | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : Impedance analyzer/material analyzer (HP4291A or equivalent HP4191A, 4192A or equivalent) | | | | | | | | | | | | |
| 7. Temperature characteristic | | | | | | | | | | | | | |
| Specified Value | Inductance change : Within $\pm 20\%$ | | | | | | | | | | | | |
| Test Methods and Remarks | Measurement of inductance shall be taken at temperature range within $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$. With reference to inductance value at $+20^{\circ}\text{C}$., change rate shall be calculated. Change of maximum inductance deviation in step 1 to 5 <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20</td> </tr> <tr> <td>2</td> <td>Minimum operating temperature</td> </tr> <tr> <td>3</td> <td>20 (Standard temperature)</td> </tr> <tr> <td>4</td> <td>Maximum operating temperature</td> </tr> <tr> <td>5</td> <td>20</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | 20 | 2 | Minimum operating temperature | 3 | 20 (Standard temperature) | 4 | Maximum operating temperature | 5 | 20 |
| Step | Temperature (°C) | | | | | | | | | | | | |
| 1 | 20 | | | | | | | | | | | | |
| 2 | Minimum operating temperature | | | | | | | | | | | | |
| 3 | 20 (Standard temperature) | | | | | | | | | | | | |
| 4 | Maximum operating temperature | | | | | | | | | | | | |
| 5 | 20 | | | | | | | | | | | | |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

8. Resistance to flexure of substrate
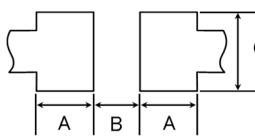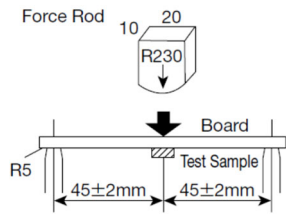
| Specified Value | No damage | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--|---|------|---|---|---|------|------|-----|-----|------|-----|------|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|--|--|
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. As illustrated below, apply force in the direction of the arrow indicating until deflection of the test board reaches to 2 mm. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Test board size | : 100 × 40 × 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Test board material | : Glass epoxy-resin | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Solder cream thickness | : 0.10mm (2020~3030 type) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | : 0.15mm (4040~8080 type) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Land dimension | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Type</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2020</td> <td>0.65</td> <td>0.7</td> <td>2.0</td> </tr> <tr> <td>2424</td> <td>0.7</td> <td>0.75</td> <td>2.0</td> </tr> <tr> <td>3030</td> <td>0.8</td> <td>1.4</td> <td>2.7</td> </tr> <tr> <td>4040</td> <td>1.2</td> <td>1.6</td> <td>3.7</td> </tr> <tr> <td>5050</td> <td>1.5</td> <td>2.1</td> <td>4.0</td> </tr> <tr> <td>6060</td> <td>1.6</td> <td>3.1</td> <td>5.7</td> </tr> <tr> <td>8080</td> <td>1.8</td> <td>3.8</td> <td>7.5</td> </tr> </tbody> </table> | Type | A | B | C | 2020 | 0.65 | 0.7 | 2.0 | 2424 | 0.7 | 0.75 | 2.0 | 3030 | 0.8 | 1.4 | 2.7 | 4040 | 1.2 | 1.6 | 3.7 | 5050 | 1.5 | 2.1 | 4.0 | 6060 | 1.6 | 3.1 | 5.7 | 8080 | 1.8 | 3.8 | 7.5 | | |
| Type | A | B | C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2020 | 0.65 | 0.7 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2424 | 0.7 | 0.75 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3030 | 0.8 | 1.4 | 2.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4040 | 1.2 | 1.6 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5050 | 1.5 | 2.1 | 4.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6060 | 1.6 | 3.1 | 5.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8080 | 1.8 | 3.8 | 7.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

9. Insulation resistance : between wires

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|


10. Insulation resistance : between wire and core

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

11. Withstanding voltage : between wire and core

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

12. Adhesion of terminal electrode

| | | | | |
|--------------------------|---|------------------------------|--|--|
| Specified Value | Shall not come off PC board | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. | | | |
| | Applied force | : 10N to X and Y directions. | | |
| | Duration | : 5s. | | |
| | Solder cream thickness | : 0.10mm (2020~3030 type) | | |
| | | : 0.15mm (4040~8080 type) | | |
| |  | | | |

13. Resistance to vibration

| | | | | |
|--------------------------|---|--|---|---|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. | | | |
| | Then it shall be submitted to below test conditions. | | | |
| | Frequency Range | 10~55Hz | | |
| | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | |
| | Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | |
| | Time | X | Y | Z |
| | | For 2 hours on each X, Y, and Z axis. | | |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

14. Solderability

| | | |
|--|--|------------|
| Specified Value | At least 90% of surface of terminal electrode is covered by new solder. | |
| Test Methods and Remarks | The test samples shall be dipped in flux, and then immersed in molten solder as shown in below table. Flux : Ethanol solution containing rosin 25%. | |
| | Solder Temperature | 245±5°C |
| | Time | 5±1.0 sec. |
| ※Immersion depth : All sides of mounting terminal shall be immersed. | | |

15. Resistance to soldering heat

| | | |
|--------------------------|--|--|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test sample shall be exposed to reflow oven at 230±5°C for 40 seconds, with peak temperature at 260±5°C for 5 seconds, 2 times. Test board material : Glass epoxy-resin Test board thickness : 1.0mm | |

16. Thermal shock

| | | | |
|---|---|------------------|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown in below table in sequence. The temperature cycle shall be repeated 100 cycles. | | |
| | Conditions of 1 cycle | | |
| | Step | Temperature (°C) | Duration (min) |
| | 1 | -40±3 | 30±3 |
| | 2 | Room temperature | Within 3 |
| 3 | +85±2 | 30±3 | |
| 4 | Room temperature | Within 3 | |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | |

17. Damp heat

| | | |
|---|---|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below table. | |
| | Temperature | 60±2°C |
| | Humidity | 90~95%RH |
| | Time | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | |

18. Loading under damp heat

| | | |
|---|--|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below table. | |
| | Temperature | 60±2°C |
| | Humidity | 90~95%RH |
| | Applied current | Rated current |
| | Time | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | |

19. Low temperature life test

| | | |
|---|--|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. After that, the test samples shall be placed at test conditions as shown in below table. | |
| | Temperature | -40±2°C |
| | Time | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

20. High temperature life test

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

21. Loading at high temperature life test

| | | |
|--------------------------|---|--------------------------|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow soldering. | |
| | Temperature | $85 \pm 2^\circ\text{C}$ |
| | Applied current | Rated current |
| | Time | $500 + 24 / - 0$ hour |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | |

22. Standard condition

| | |
|-----------------|--|
| Specified Value | Standard test condition : Unless otherwise specified, temperature is $20 \pm 15^\circ\text{C}$ and $65 \pm 20\%$ of relative humidity. When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^\circ\text{C}$ of temperature, $65 \pm 5\%$ relative humidity. Inductance is in accordance with our measured value. |
|-----------------|--|

Wire-wound Ferrite Power Inductors LSXB/LSXN/LSXP series

for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSXBH10050 for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSRN series for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LLXB/LLXN/LLXP series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLXBH10050

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLRN series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

■ PRECAUTIONS

1. Circuit Design

Precautions

- ◆ Verification of operating environment, electrical rating and performance
 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.
 2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions.
- ◆ Operating Current (Verification of Rated current)
 1. The operating current including inrush current for inductors must always be lower than their rated values.
 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.
- ◆ Temperature rise

Temperature rise of power choke coil depends on the installation condition in end products.
Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.

2. PCB Design

Precautions


- ◆ Land pattern design
 1. Please refer to a recommended land pattern.
 2. There is stress, which has been caused by distortion of a PCB, to the inductor. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)
 3. Please consider the arrangement of parts on a PCB. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)

Technical considerations


- ◆ Land pattern design

Surface Mounting

 1. Mounting and soldering conditions should be checked beforehand.
 2. Applicable soldering process to this products is reflow soldering only.
 3. Please use the recommended land pattern shown as below. Electrical characteristics and the mounting ability of the product are being considered in the recommended land pattern. If a PCB is designed with other dimensions, defective soldering and stress to a product may occur due to misalignment. The performance of the product may not be brought out. If an adopted land pattern is different from the recommended land pattern, stress to the product will increase. It may cause cracks or defective electrical characteristics of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)
 4. As coefficients of thermal expansion between an inductor and a PCB differs, cracks may occur on a ferrite core when thermal stress is applied to them after mounting an inductor. (Please refer to the drawings below.) Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)


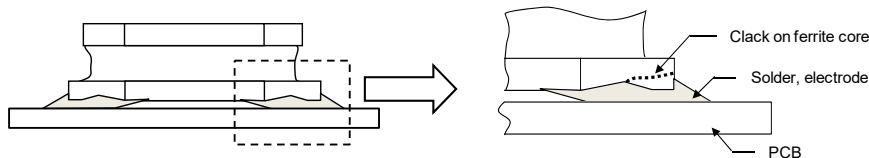


5. SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)

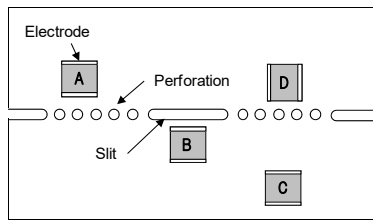


A product tends to undergo stress in order "A>C>B≡D". Please consider the layouts of a product to minimize any stresses.

3. Considerations for automatic placement
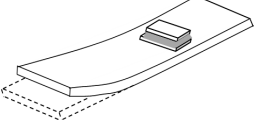
| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine <ol style="list-style-type: none"> 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine <ol style="list-style-type: none"> 1. When installing products, care should be taken not to apply distortion stress as it may deform the products. 2. Stress may be applied to a product with a warp or a twist in handling of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p><Wrap></p>  </div> <div style="text-align: center;"> <p><Twist></p>  </div> </div> |

4. Soldering
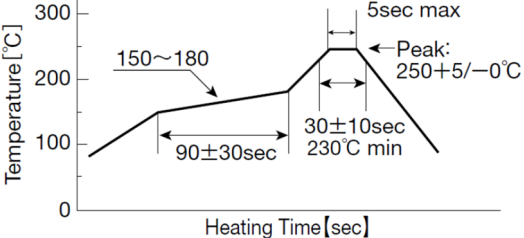
| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Reflow soldering <ol style="list-style-type: none"> 1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. 2. The product shall be used reflow soldering only. 3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering. ◆ Lead free soldering <ol style="list-style-type: none"> 1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently. ◆ Recommended conditions for using a soldering iron (LSXBH10050/LLXBH10050) <ul style="list-style-type: none"> • Put the soldering iron on the land-pattern. • Soldering iron's temperature - Below 350°C • Duration - 3 seconds or less • The soldering iron should not directly touch the inductor. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Reflow soldering <ol style="list-style-type: none"> 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. <p style="text-align: center;">Recommended reflow condition (Pb free solder)</p>  |

5. Cleaning

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Cleaning conditions <ol style="list-style-type: none"> 1. Washing by supersonic waves shall be avoided. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Cleaning conditions <ol style="list-style-type: none"> 1. If washed by supersonic waves, the products might be broken. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

6. Handling

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. Keep the product away from all magnets and magnetic objects. ◆ Breakaway PC boards (splitting along perforations) <ol style="list-style-type: none"> 1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. Please do not give the product any excessive mechanical shocks. 2. Please do not add any shock and power to a product in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part. ◆ Packing <ol style="list-style-type: none"> 1. Please avoid accumulation of a packing box as much as possible. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. There is a case that a characteristic varies with magnetic influence. ◆ Breakaway PC boards (splitting along perforations) <ol style="list-style-type: none"> 1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. There is a case to be damaged by a mechanical shock. 2. There is a case to be broken by the handling in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. Damage and a characteristic can vary with an excessive shock or stress. ◆ Packing <ol style="list-style-type: none"> 1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products. |

7. Storage conditions

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. <ul style="list-style-type: none"> ▪ Recommended conditions <ul style="list-style-type: none"> Ambient temperature : $-5\sim 40^{\circ}\text{C}$ Humidity : Below 70% RH ▪ The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. <p style="margin-left: 20px;">For this reason, product should be used within 6 months from the time of delivery.</p> <p style="margin-left: 20px;">In case of storage over 6 months, solderability shall be checked before actual usage.</p> |
| Technical considerations | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place. |

Wire-wound Ferrite Power Inductors LSXBH10050

for General Electronic Equipment for Consumer

REFLOW

PART NUMBER

*Operating Temp.: -25~+105°C (Including self-generated heat)

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | S | X | B | H | 1 | 0 | 0 | 5 | 0 | H | L | 1 | 0 | 0 | M | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | | | | | | | | |

① Series

| | |
|----------------------|---|
| Code (1)(2)(3)(4) | |
| LSXB | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |

(1) Product Group

| | |
|------|-----------|
| Code | |
| L | Inductors |

(2) Category

| | | |
|------|---|---------------|
| Code | Recommended equipment | Quality Grade |
| S | General Electronic Equipment for Consumer | 3 |

② Features

| | |
|------|-------------------------------|
| Code | Feature |
| H | Bottom electrode (Frame type) |

③ 寸法 (L×W)

| | |
|------|-----------------------|
| Code | Dimensions (L×W) [mm] |
| 100 | 10.0×9.8 |

④ 寸法 (H)

| | |
|------|---------------------|
| Code | Dimensions (H) [mm] |
| 50 | 5.0 |

⑤ Operating temperature

| | |
|------|----------------------------|
| Code | Operating temperature [°C] |
| H | -25~+105 |

(3) Type

| | |
|------|--------------------------------|
| Code | |
| X | Ferrite Wire-wound (Drum type) |

(4) Features, Characteristics

| | |
|------|----------|
| Code | |
| B | Standard |

⑥ Packaging

| | |
|------|-----------|
| Code | Packaging |
| L | Taping |

⑦ Nominal inductance

| | |
|-------------------|-------------------------|
| Code (example) | Nominal inductance [μH] |
| 1R3 | 1.3 |
| 100 | 10 |
| 101 | 100 |


※R=Decimal point

⑧ Inductance tolerance

| | |
|------|----------------------|
| Code | Inductance tolerance |
| M | ±20% |
| N | ±30% |

⑨ Internal code


STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY

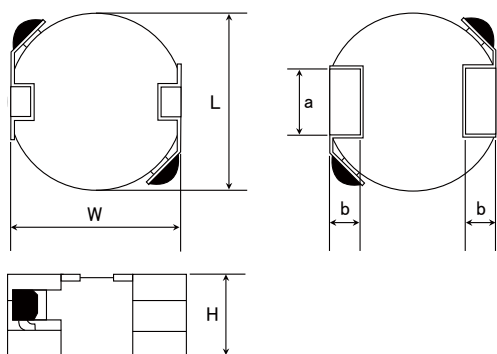

Recommended Land Patterns

Surface Mounting

- Mounting and soldering conditions should be checked beforehand.
- Applicable soldering process to these products is reflow soldering only.



Unit: mm

| Type | L | W | H | a | b | Standard quantity [pcs] Taping |
|-------|---------------------------|--------------------------|------------------------|---------------|----------------|-----------------------------------|
| 10050 | 10.0±0.3 (0.394±0.012) | 9.8±0.5 (0.386±0.020) | 5.0 max (0.197 max) | 4.0 (0.16) | 1.75 (0.07) | 500 |

Unit: mm (inch)

PART NUMBER

10050 type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [kHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSXBH10050HL1R3N | NR 10050T 1R3N | RoHS | 1.3 | $\pm 30\%$ | 53 | 0.0068 | 11,000 | 9,000 | 100 |
| LSXBH10050HL2R1N | NR 10050T 2R1N | RoHS | 2.1 | $\pm 30\%$ | 37 | 0.0080 | 10,000 | 8,300 | 100 |
| LSXBH10050HL2R9N | NR 10050T 2R9N | RoHS | 2.9 | $\pm 30\%$ | 29 | 0.0093 | 8,200 | 7,300 | 100 |
| LSXBH10050HL3R8N | NR 10050T 3R8N | RoHS | 3.8 | $\pm 30\%$ | 26 | 0.013 | 7,300 | 6,800 | 100 |
| LSXBH10050HL4R9N | NR 10050T 4R9N | RoHS | 4.9 | $\pm 30\%$ | 23 | 0.015 | 6,600 | 6,000 | 100 |
| LSXBH10050HL6R5N | NR 10050T 6R5N | RoHS | 6.5 | $\pm 30\%$ | 19 | 0.018 | 6,000 | 5,200 | 100 |
| LSXBH10050HL100M | NR 10050T 100M | RoHS | 10 | $\pm 20\%$ | 15 | 0.025 | 4,700 | 4,100 | 100 |
| LSXBH10050HL150M | NR 10050T 150M | RoHS | 15 | $\pm 20\%$ | 11 | 0.035 | 3,600 | 3,200 | 100 |
| LSXBH10050HL220M | NR 10050T 220M | RoHS | 22 | $\pm 20\%$ | 10 | 0.045 | 2,600 | 2,500 | 100 |
| LSXBH10050HL330M | NR 10050T 330M | RoHS | 33 | $\pm 20\%$ | 8.2 | 0.066 | 2,500 | 2,100 | 100 |
| LSXBH10050HL470M | NR 10050T 470M | RoHS | 47 | $\pm 20\%$ | 7.0 | 0.092 | 2,000 | 1,800 | 100 |
| LSXBH10050HL680M | NR 10050T 680M | RoHS | 68 | $\pm 20\%$ | 5.6 | 0.144 | 1,700 | 1,500 | 100 |
| LSXBH10050HL101M | NR 10050T 101M | RoHS | 100 | $\pm 20\%$ | 4.6 | 0.209 | 1,300 | 1,200 | 100 |
| LSXBH10050HL221M | NR 10050T 221M | RoHS | 220 | $\pm 20\%$ | 3.0 | 0.450 | 1,000 | 800 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The maximum rated current is the DC current value that satisfies both of current value Saturation current value and temperature rise current value. (at 20°C)

Wire-wound Ferrite Power Inductors LSXBH10050/LLXBH10050


PACKAGING

① Minimum Quantity

| Type | Standard Quantity [pcs] |
|-------|-------------------------|
| | Tape & Reel |
| 10050 | 500 |


② Tape Material

● Embossed Tape

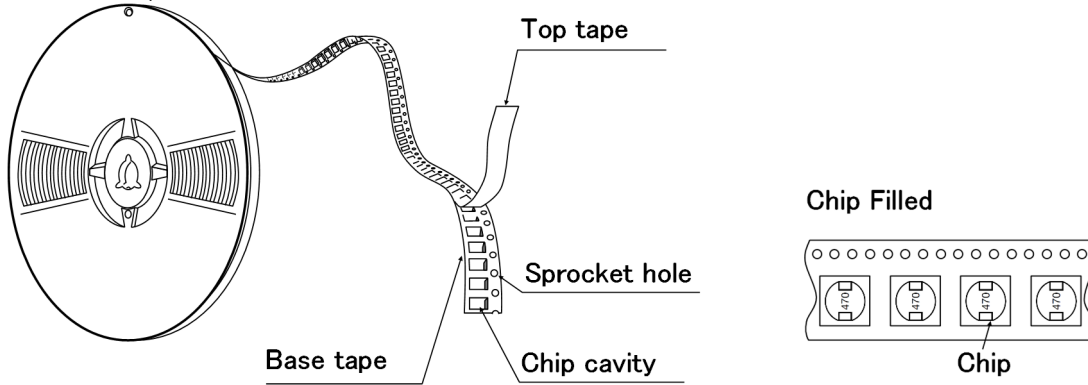

③ Taping dimensions


● Embossed tape 24mm wide (0.945 inches wide)

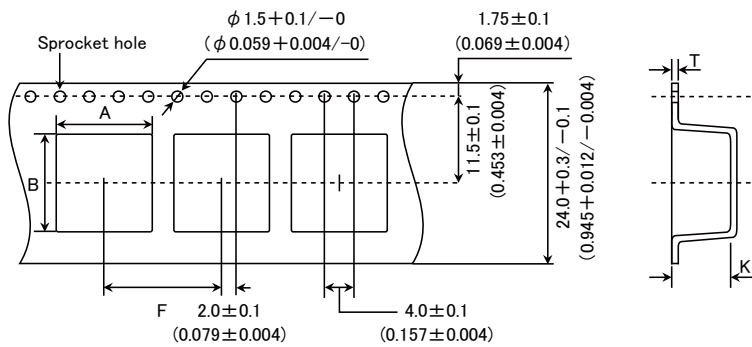

| Type | Chip cavity | | Insertion pitch | Tape thickness | |
|-------|---|--|---|---|--|
| | A | B | F | T | K |
| 10050 | 10.4 ± 0.1 (0.409 ± 0.004) | 9.9 ± 0.1 (0.390 ± 0.004) | 16.0 ± 0.1 (0.630 ± 0.004) | 0.5 ± 0.05 (0.020 ± 0.002) | 5.7 ± 0.1 (0.224 ± 0.004) |


Unit : mm (inch)

④ Leader and Blank portion

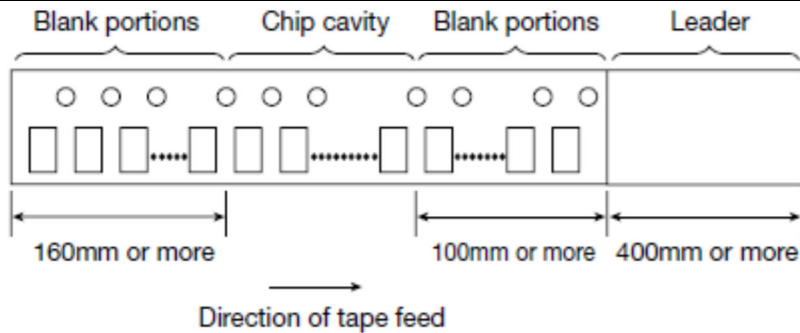

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

⑤ Reel size

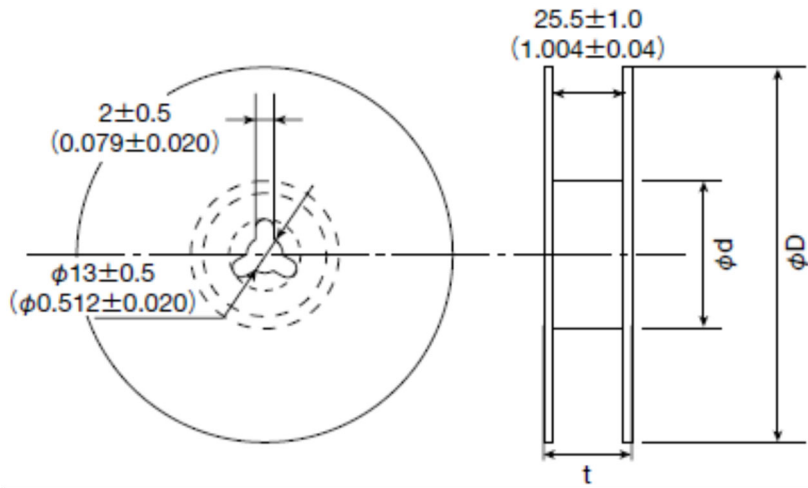


| Type | Reel size (Reference value) | | |
|-------|--------------------------------------|------------------------------------|-----------------|
| | ϕD | ϕd | t (max.) |
| 10050 | 330 ± 3 (12.99 ± 0.118) | 80 ± 2 (3.15 ± 0.078) | 30.5 (1.201) |

Unit: mm (inch)

⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.3N in the direction of the arrow as illustrated below.

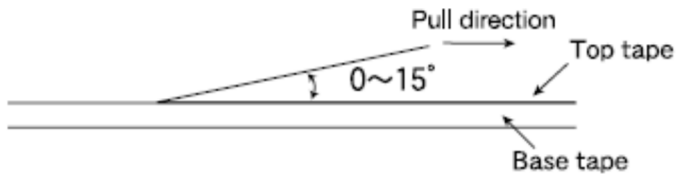

Wire-wound Ferrite Power Inductors LSXBH10050 for General Electronic Equipment for Consumer
Wire-wound Ferrite Power Inductors LLXBH10050
for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

■ RELIABILITY DATA

| 1. Operating Temperature Range | | | | | | | | | | | | | |
|---|---|------|------------------|---|----|---|-------------------------------|---|---------------------------|---|-------------------------------|---|----|
| Specified Value | -25~+105°C | | | | | | | | | | | | |
| Test Methods and Remarks | Including self-generated heat | | | | | | | | | | | | |
| 2. Storage Temperature Range | | | | | | | | | | | | | |
| Specified Value | -40~+85°C | | | | | | | | | | | | |
| Test Methods and Remarks | -5 to 40°C for the product with taping. | | | | | | | | | | | | |
| 3. Rated current | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| 4. Inductance | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : LCR Meter (HP 4263A or equivalent) Measuring frequency : 100kHz, 1V | | | | | | | | | | | | |
| 5. DC Resistance | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent) | | | | | | | | | | | | |
| 6. Self resonance frequency | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : Impedance analyzer/material analyzer (HP4291A or equivalent HP4191A, 4192A or equivalent) | | | | | | | | | | | | |
| 7. Temperature characteristic | | | | | | | | | | | | | |
| Specified Value | Inductance change : Within $\pm 20\%$ | | | | | | | | | | | | |
| Test Methods and Remarks | Measurement of inductance shall be taken at temperature range within $-25^{\circ}\text{C}\sim +85^{\circ}\text{C}$. With reference to inductance value at $+20^{\circ}\text{C}$., change rate shall be calculated. Change of maximum inductance deviation in step 1 to 5 <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20</td> </tr> <tr> <td>2</td> <td>Minimum operating temperature</td> </tr> <tr> <td>3</td> <td>20 (Standard temperature)</td> </tr> <tr> <td>4</td> <td>Maximum operating temperature</td> </tr> <tr> <td>5</td> <td>20</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | 20 | 2 | Minimum operating temperature | 3 | 20 (Standard temperature) | 4 | Maximum operating temperature | 5 | 20 |
| Step | Temperature (°C) | | | | | | | | | | | | |
| 1 | 20 | | | | | | | | | | | | |
| 2 | Minimum operating temperature | | | | | | | | | | | | |
| 3 | 20 (Standard temperature) | | | | | | | | | | | | |
| 4 | Maximum operating temperature | | | | | | | | | | | | |
| 5 | 20 | | | | | | | | | | | | |
| 8. Resistance to flexure of substrate | | | | | | | | | | | | | |
| Specified Value | — | | | | | | | | | | | | |
| 9. Insulation resistance : between wires | | | | | | | | | | | | | |
| Specified Value | — | | | | | | | | | | | | |
| 10. Insulation resistance : between wire and core | | | | | | | | | | | | | |
| Specified Value | — | | | | | | | | | | | | |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 11. Withstanding voltage : between wire and core | | | | | | | | | | | | | | | | | | | |
|--|--|--|--------------------------|-----------------|--|-----------------------------|--------------------------------|------|-------------|------------|---|------------------|----------|---|-------------|------------|---|------------------|----------|
| Specified Value | — | | | | | | | | | | | | | | | | | | |
| 12. Adhesion of terminal electrode | | | | | | | | | | | | | | | | | | | |
| Specified Value | Shall not come off PC board | | | | | | | | | | | | | | | | | | |
| Test Methods and Remarks | Applied force : 5N to X and Y directions. Duration : 5s. | | | | | | | | | | | | | | | | | | |
| 13. Resistance to vibration | | | | | | | | | | | | | | | | | | | |
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | | | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. Then it shall be submitted to below test conditions. | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <tr> <td>Frequency Range</td> <td>10~55Hz</td> </tr> <tr> <td>Total Amplitude</td> <td>1.5mm (May not exceed acceleration 196m/s²)</td> </tr> <tr> <td>Sweeping Method</td> <td>10Hz to 55Hz to 10Hz for 1min.</td> </tr> <tr> <td rowspan="3">Time</td> <td>X</td> </tr> <tr> <td>Y</td> </tr> <tr> <td>Z</td> </tr> </table> | Frequency Range | 10~55Hz | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | Time | X | Y | Z | | | | | | | | |
| | Frequency Range | 10~55Hz | | | | | | | | | | | | | | | | | |
| | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | | | | | | | | | | | | | | | | |
| | Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | | | | | | | | | | | | | | | | |
| Time | X | | | | | | | | | | | | | | | | | | |
| | Y | | | | | | | | | | | | | | | | | | |
| | Z | | | | | | | | | | | | | | | | | | |
| | For 2 hours on each X, Y, and Z axis. | | | | | | | | | | | | | | | | | | |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | | | | | | | | | | | | | | |
| 14. Solderability | | | | | | | | | | | | | | | | | | | |
| Specified Value | At least 90% of surface of terminal electrode is covered by new solder. | | | | | | | | | | | | | | | | | | |
| Test Methods and Remarks | The test samples shall be dipped in flux, and then immersed in molten solder as shown in below table. Flux : Ethanol solution containing rosin 25%. | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <tr> <td>Solder Temperature</td> <td>245\pm5$^{\circ}$C</td> </tr> <tr> <td>Time</td> <td>5\pm1.0 sec.</td> </tr> </table> | Solder Temperature | 245 \pm 5 $^{\circ}$ C | Time | 5 \pm 1.0 sec. | | | | | | | | | | | | | | |
| | Solder Temperature | 245 \pm 5 $^{\circ}$ C | | | | | | | | | | | | | | | | | |
| | Time | 5 \pm 1.0 sec. | | | | | | | | | | | | | | | | | |
| | ※Immersion depth : All sides of mounting terminal shall be immersed. | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 15. Resistance to soldering heat | | | | | | | | | | | | | | | | | | | |
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | | | | | |
| Test Methods and Remarks | The test sample shall be exposed to reflow oven at 230 \pm 5 $^{\circ}$ C for 40 seconds, with peak temperature at 260 \pm 5 $^{\circ}$ C for 5 seconds, 2 times. Test board material : Glass epoxy-resin Test board thickness : 1.6mm Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | | | | | | | | | | | | | | |
| 16. Thermal shock | | | | | | | | | | | | | | | | | | | |
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | | | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown in below table in sequence. The temperature cycle shall be repeated 100 cycles. | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th colspan="3">Conditions of 1 cycle</th> </tr> <tr> <th>Step</th> <th>Temperature ($^{\circ}$C)</th> <th>Duration (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40\pm3</td> <td>30\pm3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>+85\pm2</td> <td>30\pm3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>Within 3</td> </tr> </tbody> </table> | Conditions of 1 cycle | | | Step | Temperature ($^{\circ}$ C) | Duration (min) | 1 | -40 \pm 3 | 30 \pm 3 | 2 | Room temperature | Within 3 | 3 | +85 \pm 2 | 30 \pm 3 | 4 | Room temperature | Within 3 |
| | Conditions of 1 cycle | | | | | | | | | | | | | | | | | | |
| | Step | Temperature ($^{\circ}$ C) | Duration (min) | | | | | | | | | | | | | | | | |
| | 1 | -40 \pm 3 | 30 \pm 3 | | | | | | | | | | | | | | | | |
| | 2 | Room temperature | Within 3 | | | | | | | | | | | | | | | | |
| 3 | +85 \pm 2 | 30 \pm 3 | | | | | | | | | | | | | | | | | |
| 4 | Room temperature | Within 3 | | | | | | | | | | | | | | | | | |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| 17. Damp heat | | | | | | | | | | | | | | | | | | | |
| Specified Value | — | | | | | | | | | | | | | | | | | | |

18. Loading under damp heat

| | | | | | | | | | |
|---|---|--------------------------|--------------------------|----------|----------|-----------------|---------------|------|----------------|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below table. | | | | | | | | |
| | <table border="1"> <tr> <td>Temperature</td> <td>$60 \pm 2^\circ\text{C}$</td> </tr> <tr> <td>Humidity</td> <td>90~95%RH</td> </tr> <tr> <td>Applied current</td> <td>Rated current</td> </tr> <tr> <td>Time</td> <td>500+24/-0 hour</td> </tr> </table> | Temperature | $60 \pm 2^\circ\text{C}$ | Humidity | 90~95%RH | Applied current | Rated current | Time | 500+24/-0 hour |
| | Temperature | $60 \pm 2^\circ\text{C}$ | | | | | | | |
| | Humidity | 90~95%RH | | | | | | | |
| | Applied current | Rated current | | | | | | | |
| Time | 500+24/-0 hour | | | | | | | | |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | | | | | |

19. Low temperature life test

| | | | | | |
|---|--|---------------------------|---------------------------|------|----------------|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. After that, the test samples shall be placed at test conditions as shown in below table. | | | | |
| | <table border="1"> <tr> <td>Temperature</td> <td>$-40 \pm 2^\circ\text{C}$</td> </tr> <tr> <td>Time</td> <td>500+24/-0 hour</td> </tr> </table> | Temperature | $-40 \pm 2^\circ\text{C}$ | Time | 500+24/-0 hour |
| | Temperature | $-40 \pm 2^\circ\text{C}$ | | | |
| | Time | 500+24/-0 hour | | | |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | |

20. High temperature life test

| | | | | | |
|---|--|---------------------------|---------------------------|------|----------------|
| Specified Value | — | | | | |
| Test Methods and Remarks | <table border="1"> <tr> <td>Temperature</td> <td>$105 \pm 3^\circ\text{C}$</td> </tr> <tr> <td>Time</td> <td>500+24/-0 hour</td> </tr> </table> | Temperature | $105 \pm 3^\circ\text{C}$ | Time | 500+24/-0 hour |
| | Temperature | $105 \pm 3^\circ\text{C}$ | | | |
| | Time | 500+24/-0 hour | | | |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | |

21. Loading at high temperature life test

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

22. Standard condition

| | |
|-----------------|--|
| Specified Value | Standard test condition : Unless otherwise specified, temperature is $20 \pm 15^\circ\text{C}$ and $65 \pm 20\%$ of relative humidity. When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^\circ\text{C}$ of temperature, $65 \pm 5\%$ relative humidity. Inductance is in accordance with our measured value. |
|-----------------|--|

Wire-wound Ferrite Power Inductors LSXB/LSXN/LSXP series

for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSXBH10050 for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSRN series for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LLXB/LLXN/LLXP series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLXBH10050

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLRN series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

■ PRECAUTIONS

1. Circuit Design

Precautions

- ◆ Verification of operating environment, electrical rating and performance
 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.
 2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions.
- ◆ Operating Current (Verification of Rated current)
 1. The operating current including inrush current for inductors must always be lower than their rated values.
 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.
- ◆ Temperature rise

Temperature rise of power choke coil depends on the installation condition in end products.
Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.

2. PCB Design

Precautions


- ◆ Land pattern design
 1. Please refer to a recommended land pattern.
 2. There is stress, which has been caused by distortion of a PCB, to the inductor. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)
 3. Please consider the arrangement of parts on a PCB. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)

Technical considerations


- ◆ Land pattern design

Surface Mounting

 1. Mounting and soldering conditions should be checked beforehand.
 2. Applicable soldering process to this products is reflow soldering only.
 3. Please use the recommended land pattern shown as below. Electrical characteristics and the mounting ability of the product are being considered in the recommended land pattern. If a PCB is designed with other dimensions, defective soldering and stress to a product may occur due to misalignment. The performance of the product may not be brought out. If an adopted land pattern is different from the recommended land pattern, stress to the product will increase. It may cause cracks or defective electrical characteristics of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)
 4. As coefficients of thermal expansion between an inductor and a PCB differs, cracks may occur on a ferrite core when thermal stress is applied to them after mounting an inductor. (Please refer to the drawings below.) Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)

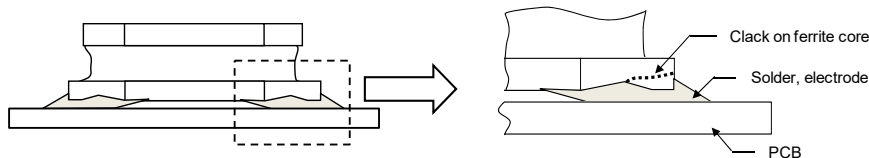

5. SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)

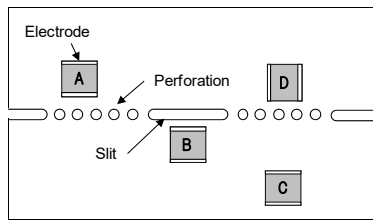

A product tends to undergo stress in order "A>C>B≡D". Please consider the layouts of a product to minimize any stresses.

3. Considerations for automatic placement

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine 1. When installing products, care should be taken not to apply distortion stress as it may deform the products. 2. Stress may be applied to a product with a warp or a twist in handling of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p><Wrap></p> </div> <div style="text-align: center;"> <p><Twist></p> </div> </div> |

4. Soldering

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Reflow soldering 1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. 2. The product shall be used reflow soldering only. 3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering. ◆ Lead free soldering 1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently. ◆ Recommended conditions for using a soldering iron (LSXBH10050/LLXBH10050) <ul style="list-style-type: none"> • Put the soldering iron on the land-pattern. • Soldering iron's temperature - Below 350°C • Duration - 3 seconds or less • The soldering iron should not directly touch the inductor. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Reflow soldering 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. <p style="text-align: center;">Recommended reflow condition (Pb free solder)</p> |

5. Cleaning

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Cleaning conditions 1. Washing by supersonic waves shall be avoided. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Cleaning conditions 1. If washed by supersonic waves, the products might be broken. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

6. Handling

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. Keep the product away from all magnets and magnetic objects. ◆ Breakaway PC boards (splitting along perforations) <ol style="list-style-type: none"> 1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. Please do not give the product any excessive mechanical shocks. 2. Please do not add any shock and power to a product in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part. ◆ Packing <ol style="list-style-type: none"> 1. Please avoid accumulation of a packing box as much as possible. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. There is a case that a characteristic varies with magnetic influence. ◆ Breakaway PC boards (splitting along perforations) <ol style="list-style-type: none"> 1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. There is a case to be damaged by a mechanical shock. 2. There is a case to be broken by the handling in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. Damage and a characteristic can vary with an excessive shock or stress. ◆ Packing <ol style="list-style-type: none"> 1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products. |

7. Storage conditions

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. <ul style="list-style-type: none"> ▪ Recommended conditions <ul style="list-style-type: none"> Ambient temperature : -5~40°C Humidity : Below 70% RH ▪ The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. <ul style="list-style-type: none"> For this reason, product should be used within 6 months from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

Wire-wound Ferrite Power Inductors LSRN series for General Electronic Equipment for Consumer

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

REFLOW

PART NUMBER

* Operating Temp.: -40~+125°C (Including self-generated heat)

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | S | R | N | J | 1 | 0 | 1 | 4 | 5 | G | L | 1 | 0 | 0 | M | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | | | | | | | | |

① Series

| Code (1)(2)(3)(4) | |
|----------------------|---|
| LSRN | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |

(1) Product Group

| Code | |
|------|-----------|
| L | Inductors |

(2) Category

| Code | Recommended equipment | Quality Grade |
|------|---|---------------|
| S | General Electronic Equipment for Consumer | 3 |

② Features

| Code | Feature |
|------|----------------------------------|
| J | Bottom electrode (Pedestal type) |

③ Dimensions (L × W)

| Code | Dimensions (L × W) [mm] |
|------|-------------------------|
| 101 | 10.1 × 10.1 |
| 125 | 12.5 × 12.5 |

④ Dimensions (H)

| Code | Dimensions (H) [mm] |
|------|---------------------|
| 45 | 4.5 |
| 55 | 5.5 |
| 65 | 6.5 |
| 75 | 7.5 |

⑤ Operating temperature

| Code | Operating temperature [°C] |
|------|----------------------------|
| G | -40~+125 |

(3) Type

| Code | |
|------|---|
| R | Ferrite Wire-wound (Drum-sleeve, pedestal type) |

(4) Features, Characteristics

| Code | |
|------|----------------------|
| N | Standard Power choke |

⑥ Packaging

| Code | Packaging |
|------|-----------|
| L | Taping |

⑦ Nominal inductance

| Code (example) | Nominal inductance [μH] |
|-------------------|-------------------------|
| 1R0 | 1.0 |
| 100 | 10 |
| 101 | 100 |


※R=小数点

⑧ Inductance tolerance

| Code | Inductance tolerance |
|------|----------------------|
| M | ±20% |
| N | ±30% |

⑨ Internal code

■ STANDARD EXTERNAL DIMENSIONS / MINIMUM QUANTITY

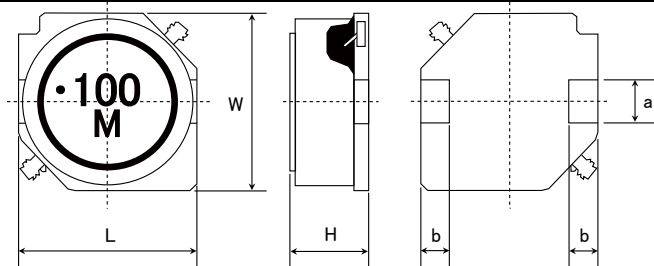

※101□□type does not have the indication of the Manufacturing date code.


| Type | L | W | H | a | b | Minimum quantity [pcs] |
|-------|---------------------------|---------------------------|---------------------------|--------------------------|---------------------------|------------------------|
| 10145 | 10.1±0.3 (0.398±0.012) | 10.1±0.3 (0.398±0.012) | 4.5±0.35 (0.177±0.014) | 2.8±0.1 (0.110±0.004) | 2.0±0.15 (0.079±0.006) | 2000 |
| 10155 | 10.1±0.3 (0.398±0.012) | 10.1±0.3 (0.398±0.012) | 5.5±0.35 (0.217±0.014) | 2.8±0.1 (0.110±0.004) | 2.0±0.15 (0.079±0.006) | 2000 |
| 10165 | 10.1±0.3 (0.398±0.012) | 10.1±0.3 (0.398±0.012) | 6.5±0.35 (0.256±0.014) | 2.8±0.1 (0.110±0.004) | 2.0±0.15 (0.079±0.006) | 2000 |
| 12555 | 12.5±0.3 (0.492±0.012) | 12.5±0.3 (0.492±0.012) | 5.5±0.35 (0.217±0.014) | 3.0±0.1 (0.118±0.004) | 2.0±0.15 (0.079±0.006) | 2000 |
| 12565 | 12.5±0.3 (0.492±0.012) | 12.5±0.3 (0.492±0.012) | 6.5±0.35 (0.256±0.014) | 3.0±0.1 (0.118±0.004) | 2.0±0.15 (0.079±0.006) | 2000 |
| 12575 | 12.5±0.3 (0.492±0.012) | 12.5±0.3 (0.492±0.012) | 7.5±0.35 (0.295±0.014) | 3.0±0.1 (0.118±0.004) | 2.0±0.15 (0.079±0.006) | 2000 |

Unit: mm (inch)

Recommended Land Patterns

Surface Mounting

- Mounting and soldering conditions should be checked beforehand.
- Applicable soldering process to these products is reflow soldering only.

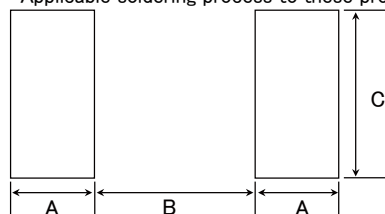

| Type | A | B | C |
|-------|-----|-----|-----|
| 10145 | 2.5 | 5.6 | 3.2 |
| 10155 | 2.5 | 5.6 | 3.2 |
| 10165 | 2.5 | 5.6 | 3.2 |
| 12555 | 2.5 | 8.6 | 3.2 |
| 12565 | 2.5 | 8.6 | 3.2 |
| 12575 | 2.5 | 8.6 | 3.2 |

Unit: mm

PART NUMBER

| ● 10145 type | | | | | | | | |
|--------------------|------------------------------------|------|----------------------------------|----------------------|---|----------------------------|----------------------------------|------------------------------|
| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | DC Resistance [Ω]($\pm 20\%$) | Rated current ※) [A] | | Measuring frequency [kHz] |
| | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSRNJ10145GL1R0NMY | NS 10145T 1R0NNA | RoHS | 1.0 | $\pm 30\%$ | 0.0049 | 12.54 | 8.90 | 100 |
| LSRNJ10145GL1R5NMY | NS 10145T 1R5NNA | RoHS | 1.5 | $\pm 30\%$ | 0.0060 | 10.34 | 7.99 | 100 |
| LSRNJ10145GL2R2NMY | NS 10145T 2R2NNA | RoHS | 2.2 | $\pm 30\%$ | 0.0085 | 8.91 | 6.64 | 100 |
| LSRNJ10145GL3R3NMY | NS 10145T 3R3NNA | RoHS | 3.3 | $\pm 30\%$ | 0.0100 | 7.33 | 6.10 | 100 |
| LSRNJ10145GL4R7NMY | NS 10145T 4R7NNA | RoHS | 4.7 | $\pm 30\%$ | 0.0144 | 6.69 | 5.03 | 100 |
| LSRNJ10145GL5R6NMY | NS 10145T 5R6NNA | RoHS | 5.6 | $\pm 30\%$ | 0.0181 | 5.85 | 4.45 | 100 |
| LSRNJ10145GL6R8NMY | NS 10145T 6R8NNA | RoHS | 6.8 | $\pm 30\%$ | 0.0200 | 5.05 | 4.22 | 100 |
| LSRNJ10145GL100MNY | NS 10145T 100MNA | RoHS | 10 | $\pm 20\%$ | 0.0248 | 4.22 | 3.77 | 100 |
| LSRNJ10145GL150MNY | NS 10145T 150MNA | RoHS | 15 | $\pm 20\%$ | 0.0381 | 3.44 | 3.00 | 100 |
| LSRNJ10145GL220MNY | NS 10145T 220MNA | RoHS | 22 | $\pm 20\%$ | 0.0520 | 2.87 | 2.55 | 100 |
| LSRNJ10145GL330MNY | NS 10145T 330MNA | RoHS | 33 | $\pm 20\%$ | 0.0815 | 2.36 | 2.01 | 100 |
| LSRNJ10145GL470MNY | NS 10145T 470MNA | RoHS | 47 | $\pm 20\%$ | 0.100 | 1.85 | 1.80 | 100 |
| LSRNJ10145GL680MNY | NS 10145T 680MNA | RoHS | 68 | $\pm 20\%$ | 0.150 | 1.66 | 1.45 | 100 |
| LSRNJ10145GL101MNY | NS 10145T 101MNA | RoHS | 100 | $\pm 20\%$ | 0.200 | 1.29 | 1.25 | 100 |
| LSRNJ10145GL151MNY | NS 10145T 151MNA | RoHS | 150 | $\pm 20\%$ | 0.341 | 1.11 | 0.94 | 100 |
| LSRNJ10145GL221MNY | NS 10145T 221MNA | RoHS | 220 | $\pm 20\%$ | 0.485 | 0.91 | 0.78 | 100 |
| LSRNJ10145GL331MNY | NS 10145T 331MNA | RoHS | 330 | $\pm 20\%$ | 0.700 | 0.71 | 0.64 | 100 |
| LSRNJ10145GL471MNY | NS 10145T 471MNA | RoHS | 470 | $\pm 20\%$ | 1.030 | 0.61 | 0.52 | 100 |
| LSRNJ10145GL681MNY | NS 10145T 681MNA | RoHS | 680 | $\pm 20\%$ | 1.57 | 0.50 | 0.42 | 100 |
| LSRNJ10145GL102MNY | NS 10145T 102MNA | RoHS | 1000 | $\pm 20\%$ | 2.58 | 0.41 | 0.32 | 100 |
| LSRNJ10145GL152MNY | NS 10145T 152MNA | RoHS | 1500 | $\pm 20\%$ | 3.70 | 0.36 | 0.27 | 100 |

| ● 10155 type | | | | | | | | |
|--------------------|------------------------------------|------|----------------------------------|----------------------|---|----------------------------|----------------------------------|------------------------------|
| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | DC Resistance [Ω]($\pm 20\%$) | Rated current ※) [A] | | Measuring frequency [kHz] |
| | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSRNJ10155GL1R5NMY | NS 10155T 1R5NNA | RoHS | 1.5 | $\pm 30\%$ | 0.0060 | 11.90 | 8.39 | 100 |
| LSRNJ10155GL2R2NMY | NS 10155T 2R2NNA | RoHS | 2.2 | $\pm 30\%$ | 0.0072 | 10.00 | 7.61 | 100 |
| LSRNJ10155GL3R3NMY | NS 10155T 3R3NNA | RoHS | 3.3 | $\pm 30\%$ | 0.0097 | 8.50 | 6.49 | 100 |
| LSRNJ10155GL4R7NMY | NS 10155T 4R7NNA | RoHS | 4.7 | $\pm 30\%$ | 0.0112 | 7.40 | 6.01 | 100 |
| LSRNJ10155GL6R8NMY | NS 10155T 6R8NNA | RoHS | 6.8 | $\pm 30\%$ | 0.0159 | 6.00 | 4.98 | 100 |
| LSRNJ10155GL100MNY | NS 10155T 100MNA | RoHS | 10 | $\pm 20\%$ | 0.0200 | 4.49 | 4.40 | 100 |
| LSRNJ10155GL150MNY | NS 10155T 150MNA | RoHS | 15 | $\pm 20\%$ | 0.0284 | 4.03 | 3.65 | 100 |
| LSRNJ10155GL220MNY | NS 10155T 220MNA | RoHS | 22 | $\pm 20\%$ | 0.0380 | 3.37 | 3.12 | 100 |

| ● 10165 type | | | | | | | | |
|--------------------|------------------------------------|------|----------------------------------|----------------------|---|----------------------------|----------------------------------|------------------------------|
| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | DC Resistance [Ω]($\pm 20\%$) | Rated current ※) [A] | | Measuring frequency [kHz] |
| | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSRNJ10165GL1R5NMY | NS 10165T 1R5NNA | RoHS | 1.5 | $\pm 30\%$ | 0.0062 | 13.60 | 8.04 | 100 |
| LSRNJ10165GL2R2NMY | NS 10165T 2R2NNA | RoHS | 2.2 | $\pm 30\%$ | 0.0074 | 10.80 | 7.32 | 100 |
| LSRNJ10165GL3R3NMY | NS 10165T 3R3NNA | RoHS | 3.3 | $\pm 30\%$ | 0.0086 | 9.30 | 6.76 | 100 |
| LSRNJ10165GL4R7NMY | NS 10165T 4R7NNA | RoHS | 4.7 | $\pm 30\%$ | 0.0112 | 7.70 | 5.88 | 100 |
| LSRNJ10165GL6R8NMY | NS 10165T 6R8NNA | RoHS | 6.8 | $\pm 30\%$ | 0.0140 | 6.00 | 5.22 | 100 |
| LSRNJ10165GL100MNY | NS 10165T 100MNA | RoHS | 10 | $\pm 20\%$ | 0.0174 | 5.20 | 4.66 | 100 |
| LSRNJ10165GL150MNY | NS 10165T 150MNA | RoHS | 15 | $\pm 20\%$ | 0.0250 | 4.50 | 3.84 | 100 |
| LSRNJ10165GL220MNY | NS 10165T 220MNA | RoHS | 22 | $\pm 20\%$ | 0.0313 | 3.60 | 3.41 | 100 |

| ● 12555 type | | | | | | | | |
|--------------------|------------------------------------|------|----------------------------------|----------------------|---|----------------------------|----------------------------------|------------------------------|
| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | DC Resistance [Ω]($\pm 20\%$) | Rated current ※) [A] | | Measuring frequency [kHz] |
| | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSRNJ12555GL6R0NMY | NS 12555T 6R0NN | RoHS | 6.0 | $\pm 30\%$ | 0.0140 | 5.01 | 5.60 | 100 |
| LSRNJ12555GL100MNY | NS 12555T 100MN | RoHS | 10 | $\pm 20\%$ | 0.0175 | 4.73 | 5.04 | 100 |
| LSRNJ12555GL150MNY | NS 12555T 150MN | RoHS | 15 | $\pm 20\%$ | 0.0233 | 3.89 | 4.18 | 100 |
| LSRNJ12555GL220MNY | NS 12555T 220MN | RoHS | 22 | $\pm 20\%$ | 0.0297 | 3.20 | 3.81 | 100 |
| LSRNJ12555GL330MNY | NS 12555T 330MN | RoHS | 33 | $\pm 20\%$ | 0.0415 | 2.64 | 3.16 | 100 |
| LSRNJ12555GL470MNY | NS 12555T 470MN | RoHS | 47 | $\pm 20\%$ | 0.0551 | 2.23 | 2.70 | 100 |
| LSRNJ12555GL680MNY | NS 12555T 680MN | RoHS | 68 | $\pm 20\%$ | 0.0797 | 1.81 | 2.14 | 100 |
| LSRNJ12555GL101MNY | NS 12555T 101MN | RoHS | 100 | $\pm 20\%$ | 0.117 | 1.53 | 1.86 | 100 |
| LSRNJ12555GL151MNY | NS 12555T 151MN | RoHS | 150 | $\pm 20\%$ | 0.176 | 1.22 | 1.43 | 100 |
| LSRNJ12555GL221MNY | NS 12555T 221MN | RoHS | 220 | $\pm 20\%$ | 0.270 | 1.00 | 1.18 | 100 |
| LSRNJ12555GL331MNY | NS 12555T 331MN | RoHS | 330 | $\pm 20\%$ | 0.410 | 0.82 | 0.96 | 100 |
| LSRNJ12555GL471MNY | NS 12555T 471MN | RoHS | 470 | $\pm 20\%$ | 0.520 | 0.68 | 0.80 | 100 |
| LSRNJ12555GL681MNY | NS 12555T 681MN | RoHS | 680 | $\pm 20\%$ | 0.760 | 0.60 | 0.72 | 100 |
| LSRNJ12555GL102MNY | NS 12555T 102MN | RoHS | 1000 | $\pm 20\%$ | 1.12 | 0.47 | 0.59 | 100 |
| LSRNJ12555GL152MNY | NS 12555T 152MN | RoHS | 1500 | $\pm 20\%$ | 1.73 | 0.40 | 0.44 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

PART NUMBER

| ● 12565 type | | | | | | | | |
|---------------------|------------------------------------|------|----------------------------------|----------------------|---|----------------------------|----------------------------------|------------------------------|
| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | DC Resistance [Ω]($\pm 20\%$) | Rated current ※) [A] | | Measuring frequency [kHz] |
| | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSRNJ12565GL2R0NMY | NS 12565T 2R0NN | RoHS | 2.0 | $\pm 30\%$ | 0.0080 | 13.91 | 7.60 | 100 |
| LSRNJ12565GL4R2NMY | NS 12565T 4R2NN | RoHS | 4.2 | $\pm 30\%$ | 0.0126 | 10.15 | 5.91 | 100 |
| LSRNJ12565GL7R0NMY | NS 12565T 7R0NN | RoHS | 7.0 | $\pm 30\%$ | 0.0162 | 7.93 | 5.21 | 100 |
| LSRNJ12565GL100MMY | NS 12565T 100MN | RoHS | 10 | $\pm 20\%$ | 0.0199 | 6.96 | 4.75 | 100 |
| LSRNJ12565GL150MMY | NS 12565T 150MN | RoHS | 15 | $\pm 20\%$ | 0.0237 | 5.84 | 4.33 | 100 |
| LSRNJ12565GL220MMY | NS 12565T 220MN | RoHS | 22 | $\pm 20\%$ | 0.0310 | 4.87 | 3.91 | 100 |
| LSRNJ12565GL330MMY | NS 12565T 330MN | RoHS | 33 | $\pm 20\%$ | 0.0390 | 3.89 | 3.22 | 100 |
| LSRNJ12565GL470MMY | NS 12565T 470MN | RoHS | 47 | $\pm 20\%$ | 0.0575 | 3.34 | 2.78 | 100 |
| LSRNJ12565GL680MMY | NS 12565T 680MN | RoHS | 68 | $\pm 20\%$ | 0.0775 | 2.78 | 2.30 | 100 |
| LSRNJ12565GL101IMMY | NS 12565T 101MN | RoHS | 100 | $\pm 20\%$ | 0.123 | 2.23 | 1.81 | 100 |
| LSRNJ12565GL151IMMY | NS 12565T 151MN | RoHS | 150 | $\pm 20\%$ | 0.173 | 1.84 | 1.54 | 100 |
| LSRNJ12565GL221IMMY | NS 12565T 221MN | RoHS | 220 | $\pm 20\%$ | 0.273 | 1.39 | 1.18 | 100 |

| ● 12575 type | | | | | | | | |
|---------------------|------------------------------------|------|----------------------------------|----------------------|---|----------------------------|----------------------------------|------------------------------|
| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | DC Resistance [Ω]($\pm 20\%$) | Rated current ※) [A] | | Measuring frequency [kHz] |
| | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSRNJ12575GL1R2NMY | NS 12575T 1R2NN | RoHS | 1.2 | $\pm 30\%$ | 0.0058 | 18.08 | 9.15 | 100 |
| LSRNJ12575GL2R7NMY | NS 12575T 2R7NN | RoHS | 2.7 | $\pm 30\%$ | 0.0085 | 13.91 | 7.69 | 100 |
| LSRNJ12575GL3R9NMY | NS 12575T 3R9NN | RoHS | 3.9 | $\pm 30\%$ | 0.0099 | 12.52 | 7.38 | 100 |
| LSRNJ12575GL5R6NMY | NS 12575T 5R6NN | RoHS | 5.6 | $\pm 30\%$ | 0.0116 | 10.85 | 6.36 | 100 |
| LSRNJ12575GL6R8NMY | NS 12575T 6R8NN | RoHS | 6.8 | $\pm 30\%$ | 0.0131 | 10.02 | 5.84 | 100 |
| LSRNJ12575GL100MMY | NS 12575T 100MN | RoHS | 10 | $\pm 20\%$ | 0.0156 | 7.65 | 5.55 | 100 |
| LSRNJ12575GL150MMY | NS 12575T 150MN | RoHS | 15 | $\pm 20\%$ | 0.0184 | 6.54 | 5.22 | 100 |
| LSRNJ12575GL220MMY | NS 12575T 220MN | RoHS | 22 | $\pm 20\%$ | 0.0260 | 5.56 | 4.05 | 100 |
| LSRNJ12575GL330MMY | NS 12575T 330MN | RoHS | 33 | $\pm 20\%$ | 0.0390 | 4.45 | 3.48 | 100 |
| LSRNJ12575GL470MMY | NS 12575T 470MN | RoHS | 47 | $\pm 20\%$ | 0.0515 | 3.76 | 2.95 | 100 |
| LSRNJ12575GL680MMY | NS 12575T 680MN | RoHS | 68 | $\pm 20\%$ | 0.0720 | 2.78 | 2.49 | 100 |
| LSRNJ12575GL101IMMY | NS 12575T 101MN | RoHS | 100 | $\pm 20\%$ | 0.110 | 2.64 | 2.01 | 100 |
| LSRNJ12575GL151IMMY | NS 12575T 151MN | RoHS | 150 | $\pm 20\%$ | 0.161 | 2.09 | 1.51 | 100 |
| LSRNJ12575GL221IMMY | NS 12575T 221MN | RoHS | 220 | $\pm 20\%$ | 0.245 | 1.81 | 1.35 | 100 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

Wire-wound Ferrite Power Inductors LSRN/LCRN/LBRN/LLRN/LMRN series


PACKAGING

① Packing Quantity

| Type | Standard Quantity (1reel) [pcs] | Minimum Quantity [pcs] |
|-------|---------------------------------|------------------------|
| | Embossed Tape | Embossed Tape |
| 10145 | 500 | 2000 |
| 10155 | 500 | 2000 |
| 10165 | 500 | 2000 |
| 12555 | 500 | 2000 |
| 12565 | 500 | 2000 |
| 12575 | 500 | 2000 |


② Tape Material

Embossed Tape

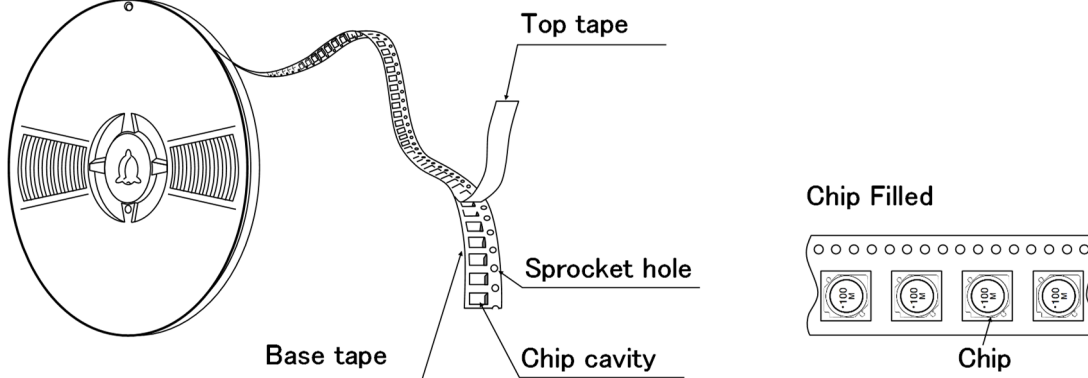

③ Taping dimensions

Embossed tape 24mm wide (0.945 inches wide)

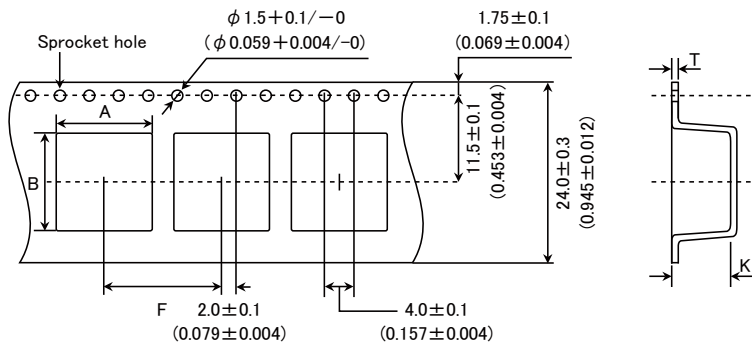


| Type | Chip cavity | | Insertion pitch | Tape thickness | |
|-------|---------------------------|---------------------------|---------------------------|--------------------------|--------------------------|
| | A | B | F | T | K |
| 10145 | 10.5±0.1 (0.413±0.004) | 10.5±0.1 (0.413±0.004) | 16.0±0.1 (0.630±0.004) | 0.4±0.1 (0.016±0.004) | 5.0±0.1 (0.197±0.004) |
| 10155 | 10.5±0.1 (0.413±0.004) | 10.5±0.1 (0.413±0.004) | 16.0±0.1 (0.630±0.004) | 0.4±0.1 (0.016±0.004) | 6.0±0.1 (0.236±0.004) |
| 10165 | 10.5±0.1 (0.413±0.004) | 10.5±0.1 (0.413±0.004) | 16.0±0.1 (0.630±0.004) | 0.4±0.1 (0.016±0.004) | 7.0±0.1 (0.276±0.004) |
| 12555 | 13.0±0.1 (0.512±0.004) | 13.0±0.1 (0.512±0.004) | 16.0±0.1 (0.630±0.004) | 0.4±0.1 (0.016±0.004) | 6.1±0.1 (0.240±0.004) |
| 12565 | 13.0±0.1 (0.512±0.004) | 13.0±0.1 (0.512±0.004) | 16.0±0.1 (0.630±0.004) | 0.4±0.1 (0.016±0.004) | 7.1±0.1 (0.280±0.004) |
| 12575 | 13.0±0.1 (0.512±0.004) | 13.0±0.1 (0.512±0.004) | 16.0±0.1 (0.630±0.004) | 0.4±0.1 (0.016±0.004) | 8.0±0.1 (0.315±0.004) |


Unit : mm (inch)

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

④ Leader and Blank portion

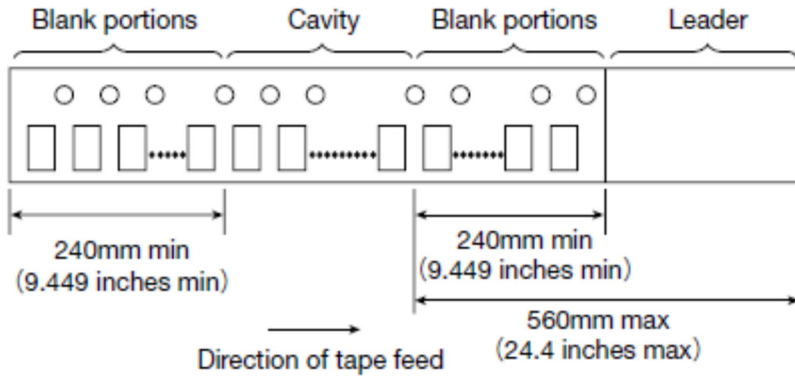

⑤ Reel size

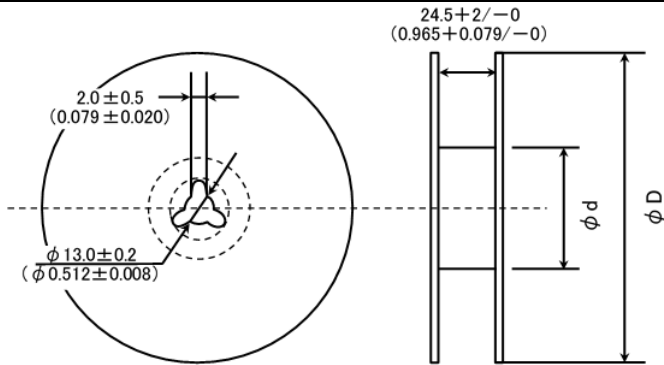


| Type | Reel size (Reference values) | |
|-------|--------------------------------------|--------------------------------------|
| | ϕD | ϕd |
| 10145 | 330 ± 2 (12.99 ± 0.079) | 100 ± 1 (3.937 ± 0.039) |
| 10155 | | |
| 10165 | | |
| 12555 | | |
| 12565 | | |
| 12575 | | |

Unit: mm (inch)

⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.3N in the direction of the arrow as illustrated below.

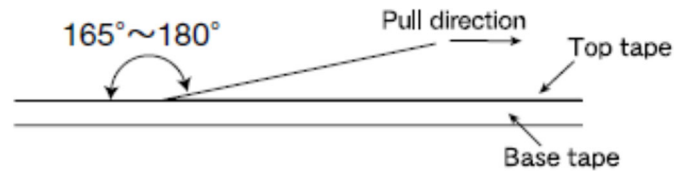



Wire-wound Ferrite Power Inductors LSRN series for General Electronic Equipment for Consumer
 Wire-wound Ferrite Power Inductors LLRN series
 for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

■ RELIABILITY DATA

| 1. Operating Temperature Range | | | | | | | | | | | | | |
|--------------------------------|---|------|------------------|---|----|---|-------------------------------|---|---------------------------|---|-------------------------------|---|----|
| Specified Value | -40~+125°C | | | | | | | | | | | | |
| Test Methods and Remarks | Including self-generated heat | | | | | | | | | | | | |
| 2. Storage Temperature Range | | | | | | | | | | | | | |
| Specified Value | -40~+85°C | | | | | | | | | | | | |
| Test Methods and Remarks | -5 to 40°C for the product with taping. | | | | | | | | | | | | |
| 3. Rated current | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| 4. Inductance | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : LCR Meter (HP 4285A or equivalent) Measuring frequency : 100kHz, 1V | | | | | | | | | | | | |
| 5. DC Resistance | | | | | | | | | | | | | |
| Specified Value | Within the specified tolerance | | | | | | | | | | | | |
| Test Methods and Remarks | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent) | | | | | | | | | | | | |
| 6. Self resonance frequency | | | | | | | | | | | | | |
| Specified Value | — | | | | | | | | | | | | |
| 7. Temperature characteristic | | | | | | | | | | | | | |
| Specified Value | Inductance change : Within $\pm 15\%$ | | | | | | | | | | | | |
| Test Methods and Remarks | Measurement of inductance shall be taken at temperature range within $-40^{\circ}\text{C}\sim +125^{\circ}\text{C}$. With reference to inductance value at $+20^{\circ}\text{C}$., change rate shall be calculated. Change of maximum inductance deviation in step 1 to 5 | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20</td> </tr> <tr> <td>2</td> <td>Minimum operating temperature</td> </tr> <tr> <td>3</td> <td>20 (Standard temperature)</td> </tr> <tr> <td>4</td> <td>Maximum operating temperature</td> </tr> <tr> <td>5</td> <td>20</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | 20 | 2 | Minimum operating temperature | 3 | 20 (Standard temperature) | 4 | Maximum operating temperature | 5 | 20 |
| Step | Temperature (°C) | | | | | | | | | | | | |
| 1 | 20 | | | | | | | | | | | | |
| 2 | Minimum operating temperature | | | | | | | | | | | | |
| 3 | 20 (Standard temperature) | | | | | | | | | | | | |
| 4 | Maximum operating temperature | | | | | | | | | | | | |
| 5 | 20 | | | | | | | | | | | | |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

8. Resistance to flexure of substrate
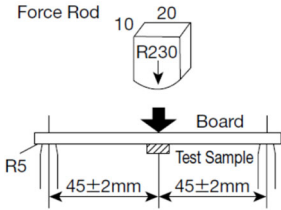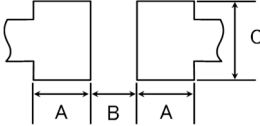
| Specified Value | No damage | | | | | | | | | | | | | | |
|---|--|---|-----|--|------|---|---|---|-----|-----|-----|-----|-----|-----|-----|
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. As illustrated below, apply force in the direction of the arrow indicating until deflection of the test board reaches to 2 mm. Test board size : 100 × 40 × 1.0 Test board material : Glass epoxy-resin Solder cream thickness : 0.15mm | | | | | | | | | | | | | | |
| |  | | | | | | | | | | | | | | |
| | Land dimension | <table border="1"> <thead> <tr> <th>Type</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>101</td> <td>2.5</td> <td>5.6</td> <td>3.2</td> </tr> <tr> <td>125</td> <td>2.5</td> <td>8.6</td> <td>3.2</td> </tr> </tbody> </table> | | | Type | A | B | C | 101 | 2.5 | 5.6 | 3.2 | 125 | 2.5 | 8.6 |
| Type | A | B | C | | | | | | | | | | | | |
| 101 | 2.5 | 5.6 | 3.2 | | | | | | | | | | | | |
| 125 | 2.5 | 8.6 | 3.2 | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | |

9. Insulation resistance : between wires

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|


10. Insulation resistance : between wire and core

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

11. Withstanding voltage : between wire and core

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

12. Adhesion of terminal electrode

| | | | |
|--------------------------|--|--|--|
| Specified Value | Shall not come off PC board | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. Applied force : 10N to X and Y directions. Duration : 5s. Solder cream thickness : 0.15mm | | |
| |  | | |

13. Resistance to vibration

| | | | | | | | | | | | | | | | | | |
|---|---|--|--|-----------------|---------|--|-----------------|--|--|-----------------|--------------------------------|--|------|---|---------------------------------------|---|---|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | | | | | | | | | | | | | | | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. Then it shall be submitted to below test conditions. | | | | | | | | | | | | | | | | |
| | <table border="1"> <tr> <td>Frequency Range</td> <td colspan="2">10~55Hz</td> </tr> <tr> <td>Total Amplitude</td> <td colspan="2">1.5mm (May not exceed acceleration 196m/s²)</td> </tr> <tr> <td>Sweeping Method</td> <td colspan="2">10Hz to 55Hz to 10Hz for 1min.</td> </tr> <tr> <td rowspan="3">Time</td> <td>X</td> <td rowspan="3">For 2 hours on each X, Y, and Z axis.</td> </tr> <tr> <td>Y</td> </tr> <tr> <td>Z</td> </tr> </table> | | | Frequency Range | 10~55Hz | | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | Time | X | For 2 hours on each X, Y, and Z axis. | Y | Z |
| | Frequency Range | 10~55Hz | | | | | | | | | | | | | | | |
| | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | | | | | | | | | | | | | | |
| Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | | | | | | | | | | | | | | | |
| Time | X | For 2 hours on each X, Y, and Z axis. | | | | | | | | | | | | | | | |
| | Y | | | | | | | | | | | | | | | | |
| | Z | | | | | | | | | | | | | | | | |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | | | | | | | | | | | | | | | |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

14. Solderability

| | | |
|--|--|------------|
| Specified Value | At least 90% of surface of terminal electrode is covered by new solder. | |
| Test Methods and Remarks | The test samples shall be dipped in flux, and then immersed in molten solder as shown in below table. Flux : Ethanol solution containing rosin 25%. | |
| | Solder Temperature | 245±5°C |
| | Time | 5±1.0 sec. |
| ※Immersion depth : All sides of mounting terminal shall be immersed. | | |

15. Resistance to soldering heat

| | | |
|--------------------------|---|---------------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test sample shall be exposed to reflow oven at 230±5°C for 40 seconds, with peak temperature at 260±5°C for 5 seconds, 2 times. | |
| | Test board material | : Glass epoxy-resin |
| | Test board thickness | : 1.0mm |

16. Thermal shock

| | | | |
|---|---|------------------|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown in below table in sequence. The temperature cycle shall be repeated 100 cycles. | | |
| | Conditions of 1 cycle | | |
| | Step | Temperature (°C) | Duration (min) |
| | 1 | -40±3 | 30±3 |
| | 2 | Room temperature | Within 3 |
| 3 | +85±2 | 30±3 | |
| 4 | Room temperature | Within 3 | |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | | |

17. Damp heat

| | | |
|---|---|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below table. | |
| | Temperature | 60±2°C |
| | Humidity | 90~95%RH |
| | Time | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | |

18. Loading under damp heat

| | | |
|---|--|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below table. | |
| | Temperature | 60±2°C |
| | Humidity | 90~95%RH |
| | Applied current | Rated current |
| | Time | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | |

19. Low temperature life test

| | | |
|---|--|----------------|
| Specified Value | Inductance change : Within ±10% No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow. After that, the test samples shall be placed at test conditions as shown in below table. | |
| | Temperature | -40±2°C |
| | Time | 500+24/-0 hour |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | | |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

20. High temperature life test

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

21. Loading at high temperature life test

| | | |
|--------------------------|---|--------------------------|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | |
| Test Methods and Remarks | The test samples shall be soldered to the test board by the reflow soldering. | |
| | Temperature | $85 \pm 2^\circ\text{C}$ |
| | Applied current | Rated current |
| | Time | $500 + 24 / - 0$ hour |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. | |

22. Standard condition

| | |
|-----------------|--|
| Specified Value | Standard test condition : Unless otherwise specified, temperature is $20 \pm 15^\circ\text{C}$ and $65 \pm 20\%$ of relative humidity. When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^\circ\text{C}$ of temperature, $65 \pm 5\%$ relative humidity. Inductance is in accordance with our measured value. |
|-----------------|--|

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

Wire-wound Ferrite Power Inductors LSXB/LSXN/LSXP series

for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSXBH10050 for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSRN series for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LLXB/LLXN/LLXP series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLXBH10050

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLRN series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)


PRECAUTIONS

1. Circuit Design

- | | |
|-------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Verification of operating environment, electrical rating and performance <ol style="list-style-type: none"> 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications. 2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions. ◆ Operating Current (Verification of Rated current) <ol style="list-style-type: none"> 1. The operating current including inrush current for inductors must always be lower than their rated values. 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect. ◆ Temperature rise <p>Temperature rise of power choke coil depends on the installation condition in end products.</p> <p>Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p> |
|-------------|--|


2. PCB Design

- | | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Land pattern design <ol style="list-style-type: none"> 1. Please refer to a recommended land pattern. 2. There is stress, which has been caused by distortion of a PCB, to the inductor. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) 3. Please consider the arrangement of parts on a PCB. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) |
| Technical considerations | <ul style="list-style-type: none"> ◆ Land pattern design <p>Surface Mounting</p> <ol style="list-style-type: none"> 1. Mounting and soldering conditions should be checked beforehand. 2. Applicable soldering process to this products is reflow soldering only. 3. Please use the recommended land pattern shown as below. Electrical characteristics and the mounting ability of the product are being considered in the recommended land pattern. If a PCB is designed with other dimensions, defective soldering and stress to a product may occur due to misalignment. The performance of the product may not be brought out. If an adopted land pattern is different from the recommended land pattern, stress to the product will increase. It may cause cracks or defective electrical characteristics of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) 4. As coefficients of thermal expansion between an inductor and a PCB differs, cracks may occur on a ferrite core when thermal stress is applied to them after mounting an inductor. (Please refer to the drawings below.) Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) |

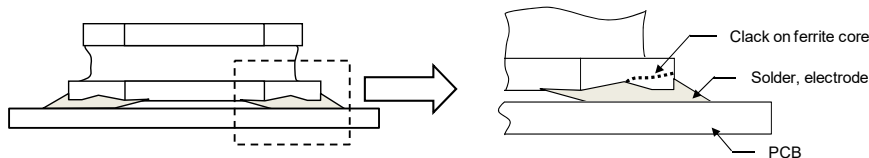

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

5. SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP)

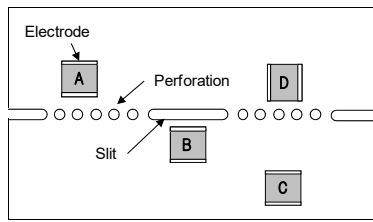

A product tends to undergo stress in order "A>C>B≡D". Please consider the layouts of a product to minimize any stresses.

3. Considerations for automatic placement

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine 1. When installing products, care should be taken not to apply distortion stress as it may deform the products. 2. Stress may be applied to a product with a warp or a twist in handling of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LSXB/LSXN/LSXP/LLXB/LLXN/LLXP) <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p><Wrap></p> </div> <div style="text-align: center;"> <p><Twist></p> </div> </div> |

4. Soldering

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Reflow soldering 1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. 2. The product shall be used reflow soldering only. 3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering. ◆ Lead free soldering 1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently. ◆ Recommended conditions for using a soldering iron (LSXBH10050/LLXBH10050) <ul style="list-style-type: none"> • Put the soldering iron on the land-pattern. • Soldering iron's temperature - Below 350°C • Duration - 3 seconds or less • The soldering iron should not directly touch the inductor. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Reflow soldering 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. <p style="text-align: center;">Recommended reflow condition (Pb free solder)</p> |

5. Cleaning

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Cleaning conditions 1. Washing by supersonic waves shall be avoided. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Cleaning conditions 1. If washed by supersonic waves, the products might be broken. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>)

6. Handling

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. Keep the product away from all magnets and magnetic objects. ◆ Breakaway PC boards (splitting along perforations) <ol style="list-style-type: none"> 1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. Please do not give the product any excessive mechanical shocks. 2. Please do not add any shock and power to a product in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part. ◆ Packing <ol style="list-style-type: none"> 1. Please avoid accumulation of a packing box as much as possible. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. There is a case that a characteristic varies with magnetic influence. ◆ Breakaway PC boards (splitting along perforations) <ol style="list-style-type: none"> 1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. There is a case to be damaged by a mechanical shock. 2. There is a case to be broken by the handling in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. Damage and a characteristic can vary with an excessive shock or stress. ◆ Packing <ol style="list-style-type: none"> 1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products. |

7. Storage conditions

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. <ul style="list-style-type: none"> ▪ Recommended conditions <ul style="list-style-type: none"> Ambient temperature : $-5\sim 40^{\circ}\text{C}$ Humidity : Below 70% RH ▪ The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. <p style="margin-left: 20px;">For this reason, product should be used within 6 months from the time of delivery.</p> <p style="margin-left: 20px;">In case of storage over 6 months, solderability shall be checked before actual usage.</p> |
| Technical considerations | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place. |

Wire-wound Ferrite Power Inductors LSQP series for General Electronic Equipment for Consumer

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

REFLOW

PART NUMBER

* Operating Temp.: -40~+105°C (Including self-generated heat)

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | S | Q | P | B | 2 | 5 | 1 | 8 | 1 | 2 | T | 2 | R | 2 | M | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | | | | | | | | | |

① Series

| Code (1)(2)(3)(4) | |
|----------------------|---|
| LSQP | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |

(1) Product Group

| Code | |
|------|-----------|
| L | Inductors |

(2) Category

| Code | Recommended equipment | Quality Grade |
|------|---|---------------|
| S | General Electronic Equipment for Consumer | 3 |

② Features

| Code | Feature |
|------|---|
| B | L-shape electrode (Ag-resin × Sn-plate) |

③ Dimensions (L × W)

| Code | Type (inch) | Dimensions (L × W) [mm] |
|------|-------------|----------------------------|
| 1608 | 1608 (0603) | 1.6 × 0.8 |
| 2012 | 2012 (0805) | 2.0 × 1.25 |
| 2016 | 2016 (0806) | 2.0 × 1.6 |
| 2518 | 2518 (1007) | 2.5 × 1.8 |
| 3225 | 3225 (1210) | 3.2 × 2.5 |

④ Dimensions (T)

| Code | Dimensions (T) [mm] |
|------|---------------------|
| 07 | 0.7 |
| 08 | 0.8 |
| 10 | 1.0 |
| 12 | 1.2 |
| 14 | 1.4 |
| 15 | 1.5 |
| 16 | 1.6 |
| 17 | 1.7 |
| 18 | 1.8 |

(3) Type

| Code | |
|------|--------------------------------------|
| Q | Ferrite Wire-wound (Horizontal type) |

(4) Features, Characteristics

| Code | |
|------|--------------------------|
| P | High current power choke |

⑤ Packaging

| Code | Packaging |
|------|-----------|
| T | Taping |

⑥ Nominal inductance


| Code (example) | Nominal inductance [μH] |
|-------------------|-------------------------|
| R20 | 0.2 |
| 1R0 | 1.0 |
| 100 | 10 |
| 101 | 100 |

※R=Decimal point


⑦ Inductance tolerance

| Code | Inductance tolerance |
|------|----------------------|
| K | ±10% |
| M | ±20% |

⑧ Internal code

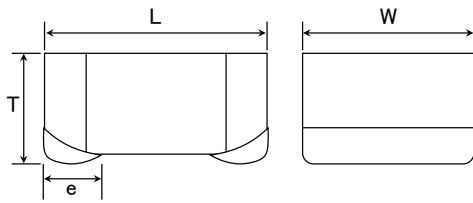STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY

Recommended Land Patterns
Surface Mounting

- Mounting and soldering conditions should be checked beforehand.
- Applicable soldering process to these products is reflow soldering only.



| Type | A | B | C |
|------|------|------|------|
| 1608 | 0.55 | 0.70 | 1.00 |
| 2012 | 0.60 | 1.00 | 1.45 |
| 2016 | 0.60 | 1.00 | 1.80 |
| 2518 | 0.60 | 1.50 | 2.00 |
| 3225 | 0.85 | 1.70 | 2.70 |

Unit : mm

| Type | L | W | T | e | Standard quantity [pcs] | |
|--------|--------------------------|---------------------------|--------------------------|----------------------------|-------------------------|---------------|
| | | | | | Paper tape | Embossed tape |
| 160807 | 1.6±0.2 (0.063±0.008) | 0.8±0.2 (0.031±0.008) | 0.7 max (0.028 max) | 0.45±0.15 (0.016±0.006) | — | 3000 |
| 160808 | 1.6±0.2 (0.063±0.008) | 0.8±0.2 (0.031±0.008) | 0.8±0.2 (0.031±0.008) | 0.45±0.15 (0.016±0.006) | — | 3000 |
| 201210 | 2.0±0.2 (0.079±0.008) | 1.25±0.2 (0.049±0.008) | 1.0 max (0.040 max) | 0.5±0.2 (0.020±0.008) | — | 3000 |
| 201214 | 2.0±0.2 (0.079±0.008) | 1.25±0.2 (0.049±0.008) | 1.4 max (0.056 max) | 0.5±0.2 (0.020±0.008) | — | 2000 |
| 201616 | 2.0±0.2 (0.079±0.008) | 1.6±0.2 (0.063±0.008) | 1.6±0.2 (0.063±0.008) | 0.5±0.2 (0.020±0.008) | — | 2000 |
| 251810 | 2.5±0.2 (0.098±0.008) | 1.8±0.2 (0.071±0.008) | 1.0 max (0.040 max) | 0.5±0.2 (0.020±0.008) | — | 3000 |
| 251812 | 2.5±0.2 (0.098±0.008) | 1.8±0.2 (0.071±0.008) | 1.2 max (0.048 max) | 0.5±0.2 (0.020±0.008) | — | 3000 |
| 251815 | 2.5±0.2 (0.098±0.008) | 1.8±0.2 (0.071±0.008) | 1.5 max (0.060 max) | 0.5±0.2 (0.020±0.008) | — | 2000 |
| 251818 | 2.5±0.2 (0.098±0.008) | 1.8±0.2 (0.071±0.008) | 1.8±0.2 (0.071±0.008) | 0.5±0.2 (0.020±0.008) | — | 2000 |
| 322517 | 3.2±0.2 (0.126±0.008) | 2.5±0.2 (0.098±0.008) | 1.7 max (0.068 max) | 0.75±0.2 (0.03±0.008) | — | 2000 |

Unit : mm (inch)

PART NUMBER

● 1608 (0603) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB160807T1R0M | BR L1608T1R0M | RoHS | 1.0 | $\pm 20\%$ | 700 | 0.230 | 510 | 650 | 1.0 |
| LSQPB160807T1R5M | BR L1608T1R5M | RoHS | 1.5 | $\pm 20\%$ | 600 | 0.280 | 440 | 590 | 1.0 |
| LSQPB160807T2R2M | BR L1608T2R2M | RoHS | 2.2 | $\pm 20\%$ | 400 | 0.400 | 360 | 500 | 1.0 |
| LSQPB160807T3R3M | BR L1608T3R3M | RoHS | 3.3 | $\pm 20\%$ | 300 | 0.650 | 290 | 390 | 1.0 |
| LSQPB160807T4R7M | BR L1608T4R7M | RoHS | 4.7 | $\pm 20\%$ | 150 | 1.00 | 240 | 310 | 1.0 |
| LSQPB160807T6R8M | BR L1608T6R8M | RoHS | 6.8 | $\pm 20\%$ | 100 | 1.64 | 200 | 250 | 1.0 |
| LSQPB160807T100M | BR L1608T100M | RoHS | 10 | $\pm 20\%$ | 45 | 2.00 | 170 | 220 | 1.0 |
| LSQPB160807T150M | BR L1608T150M | RoHS | 15 | $\pm 20\%$ | 32 | 2.56 | 150 | 200 | 1.0 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB160808TR43M06 | BR C1608TR43M 6 | RoHS | 0.43 | $\pm 20\%$ | 740 | 0.082 | 1,400 | 1,100 | 6.0 |
| LSQPB160808TR50M06 | BR C1608TR50M 6 | RoHS | 0.50 | $\pm 20\%$ | 710 | 0.090 | 1,200 | 1,050 | 6.0 |
| LSQPB160808TR60M06 | BR C1608TR60M 6 | RoHS | 0.60 | $\pm 20\%$ | 630 | 0.099 | 1,100 | 940 | 6.0 |
| LSQPB160808TR72M06 | BR C1608TR72M 6 | RoHS | 0.72 | $\pm 20\%$ | 600 | 0.144 | 1,000 | 810 | 6.0 |
| LSQPB160808TR82M06 | BR C1608TR82M 6 | RoHS | 0.82 | $\pm 20\%$ | 560 | 0.176 | 950 | 730 | 6.0 |
| LSQPB160808T1R0M06 | BR C1608T1R0M 6 | RoHS | 1.0 | $\pm 20\%$ | 550 | 0.188 | 890 | 680 | 6.0 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB160808TR20M | BR C1608TR20M | RoHS | 0.20 | $\pm 20\%$ | 400 | 0.060 | 1,750 | 980 | 7.96 |
| LSQPB160808TR35M | BR C1608TR35M | RoHS | 0.35 | $\pm 20\%$ | 300 | 0.080 | 1,400 | 810 | 7.96 |
| LSQPB160808TR45M | BR C1608TR45M | RoHS | 0.45 | $\pm 20\%$ | 200 | 0.090 | 1,250 | 800 | 7.96 |
| LSQPB160808TR56M | BR C1608TR56M | RoHS | 0.56 | $\pm 20\%$ | 170 | 0.095 | 1,150 | 760 | 7.96 |
| LSQPB160808TR77M | BR C1608TR77M | RoHS | 0.77 | $\pm 20\%$ | 150 | 0.110 | 1,000 | 660 | 7.96 |
| LSQPB160808T1R0M | BR C1608T1R0M | RoHS | 1.0 | $\pm 20\%$ | 140 | 0.180 | 850 | 520 | 7.96 |
| LSQPB160808T1R5M | BR C1608T1R5M | RoHS | 1.5 | $\pm 20\%$ | 120 | 0.300 | 700 | 410 | 7.96 |
| LSQPB160808T2R2M | BR C1608T2R2M | RoHS | 2.2 | $\pm 20\%$ | 100 | 0.550 | 550 | 280 | 7.96 |

● 2012 (0805) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|--------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB201210TR47M06 | BR L2012TR47M 6 | RoHS | 0.47 | $\pm 20\%$ | 500 | 0.048 | 1,500 | 1,900 | 6.0 |
| LSQPB201210T1R0M06 | BR L2012T1R0M 6 | RoHS | 1.0 | $\pm 20\%$ | 400 | 0.108 | 1,050 | 1,230 | 6.0 |
| LSQPB201210T2R2MD6 | BR L2012T2R2MD6 | RoHS | 2.2 | $\pm 20\%$ | 250 | 0.184 | 680 | 950 | 6.0 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB201210TR47M | BR L2012TR47M | RoHS | 0.47 | $\pm 20\%$ | 350 | 0.090 | 1,100 | 1,050 | 7.96 |
| LSQPB201210T1R0M | BR L2012T1R0M | RoHS | 1.0 | $\pm 20\%$ | 300 | 0.135 | 850 | 850 | 7.96 |
| LSQPB201210T1R5M | BR L2012T1R5M | RoHS | 1.5 | $\pm 20\%$ | 250 | 0.180 | 700 | 750 | 7.96 |
| LSQPB201210T2R2M | BR L2012T2R2M | RoHS | 2.2 | $\pm 20\%$ | 200 | 0.300 | 600 | 550 | 7.96 |
| LSQPB201210T3R3M | BR L2012T3R3M | RoHS | 3.3 | $\pm 20\%$ | 190 | 0.500 | 490 | 440 | 7.96 |
| LSQPB201210T4R7M | BR L2012T4R7M | RoHS | 4.7 | $\pm 20\%$ | 150 | 0.550 | 340 | 400 | 7.96 |
| LSQPB201210T6R8M | BR L2012T6R8M | RoHS | 6.8 | $\pm 20\%$ | 60 | 0.750 | 290 | 350 | 7.96 |
| LSQPB201210T100M | BR L2012T100M | RoHS | 10 | $\pm 20\%$ | 30 | 0.850 | 270 | 330 | 2.52 |
| LSQPB201210T150M | BR L2012T150M | RoHS | 15 | $\pm 20\%$ | 15 | 1.00 | 220 | 300 | 2.52 |
| LSQPB201210T220M | BR L2012T220M | RoHS | 22 | $\pm 20\%$ | 13 | 1.30 | 190 | 270 | 2.52 |
| LSQPB201210T330M | BR L2012T330M | RoHS | 33 | $\pm 20\%$ | 8.0 | 2.00 | 150 | 220 | 2.52 |
| LSQPB201210T470M | BR L2012T470M | RoHS | 47 | $\pm 20\%$ | 7.0 | 3.50 | 125 | 160 | 2.52 |
| LSQPB201210T680M | BR L2012T680M | RoHS | 68 | $\pm 20\%$ | 6.5 | 5.80 | 100 | 110 | 2.52 |
| LSQPB201210T101M | BR L2012T101M | RoHS | 100 | $\pm 20\%$ | 6.0 | 7.70 | 85 | 85 | 0.796 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|-------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB201214T1R0M | BR C2012T1R0M | RoHS | 1.0 | $\pm 20\%$ | 490 | 0.060 | 1,500 | 1,400 | 1.0 |
| LSQPB201214T1R5MD | BR C2012T1R5MD | RoHS | 1.5 | $\pm 20\%$ | 390 | 0.090 | 1,200 | 1,100 | 1.0 |
| LSQPB201214T2R2MD | BR C2012T2R2MD | RoHS | 2.2 | $\pm 20\%$ | 350 | 0.110 | 1,100 | 1,000 | 1.0 |
| LSQPB201214T3R3MD | BR C2012T3R3MD | RoHS | 3.3 | $\pm 20\%$ | 300 | 0.170 | 800 | 870 | 1.0 |
| LSQPB201214T4R7MD | BR C2012T4R7MD | RoHS | 4.7 | $\pm 20\%$ | 250 | 0.265 | 700 | 600 | 1.0 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

■ PART NUMBER

● 2016 (0806) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB201616T1R0M | BR C2016T1R0M | RoHS | 1.0 | ±20% | 450 | 0.085 | 1,350 | 1,100 | 0.10 |
| LSQPB201616T1R5M | BR C2016T1R5M | RoHS | 1.5 | ±20% | 370 | 0.150 | 1,100 | 820 | 0.10 |
| LSQPB201616T2R2M | BR C2016T2R2M | RoHS | 2.2 | ±20% | 250 | 0.180 | 910 | 760 | 0.10 |
| LSQPB201616T3R3M | BR C2016T3R3M | RoHS | 3.3 | ±20% | 140 | 0.220 | 740 | 680 | 0.10 |
| LSQPB201616T4R7M | BR C2016T4R7M | RoHS | 4.7 | ±20% | 78 | 0.270 | 660 | 610 | 0.10 |
| LSQPB201616T6R8M | BR C2016T6R8M | RoHS | 6.8 | ±20% | 39 | 0.330 | 550 | 560 | 0.10 |
| LSQPB201616T100K | BR C2016T100K | RoHS | 10 | ±10% | 35 | 0.400 | 450 | 520 | 0.10 |
| LSQPB201616T100M | BR C2016T100M | RoHS | 10 | ±20% | 35 | 0.400 | 450 | 520 | 0.10 |
| LSQPB201616T150K | BR C2016T150K | RoHS | 15 | ±10% | 28 | 0.600 | 400 | 410 | 0.10 |
| LSQPB201616T150M | BR C2016T150M | RoHS | 15 | ±20% | 28 | 0.600 | 400 | 410 | 0.10 |
| LSQPB201616T220K | BR C2016T220K | RoHS | 22 | ±10% | 24 | 1.00 | 310 | 310 | 0.10 |
| LSQPB201616T220M | BR C2016T220M | RoHS | 22 | ±20% | 24 | 1.00 | 310 | 310 | 0.10 |
| LSQPB201616T330K | BR C2016T330K | RoHS | 33 | ±10% | 13 | 1.70 | 270 | 240 | 0.10 |
| LSQPB201616T330M | BR C2016T330M | RoHS | 33 | ±20% | 13 | 1.70 | 270 | 240 | 0.10 |
| LSQPB201616T470K | BR C2016T470K | RoHS | 47 | ±10% | 11 | 2.20 | 210 | 210 | 0.10 |
| LSQPB201616T470M | BR C2016T470M | RoHS | 47 | ±20% | 11 | 2.20 | 210 | 210 | 0.10 |
| LSQPB201616T680K | BR C2016T680K | RoHS | 68 | ±10% | 8 | 2.80 | 200 | 190 | 0.10 |
| LSQPB201616T680M | BR C2016T680M | RoHS | 68 | ±20% | 8 | 2.80 | 200 | 190 | 0.10 |
| LSQPB201616T101K | BR C2016T101K | RoHS | 100 | ±10% | 7 | 3.40 | 140 | 170 | 0.10 |
| LSQPB201616T101M | BR C2016T101M | RoHS | 100 | ±20% | 7 | 3.40 | 140 | 170 | 0.10 |

● 2518 (1007) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB251810T1R0M | BRFL2518T1R0M | RoHS | 1.0 | ±20% | 130 | 0.090 | 1,200 | 1,200 | 1.0 |
| LSQPB251810T1R5M | BRFL2518T1R5M | RoHS | 1.5 | ±20% | 100 | 0.110 | 1,100 | 1,000 | 1.0 |
| LSQPB251810T2R2M | BRFL2518T2R2M | RoHS | 2.2 | ±20% | 80 | 0.130 | 850 | 950 | 1.0 |
| LSQPB251810T3R3M | BRFL2518T3R3M | RoHS | 3.3 | ±20% | 70 | 0.220 | 700 | 700 | 1.0 |
| LSQPB251810T4R7M | BRFL2518T4R7M | RoHS | 4.7 | ±20% | 60 | 0.330 | 650 | 650 | 1.0 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB251812T1R0M | BR L2518T1R0M | RoHS | 1.0 | ±20% | 130 | 0.080 | 1,600 | 1,000 | 7.96 |
| LSQPB251812T1R5M | BR L2518T1R5M | RoHS | 1.5 | ±20% | 100 | 0.100 | 1,200 | 920 | 7.96 |
| LSQPB251812T2R2M | BR L2518T2R2M | RoHS | 2.2 | ±20% | 80 | 0.135 | 1,000 | 850 | 7.96 |
| LSQPB251812T3R3M | BR L2518T3R3M | RoHS | 3.3 | ±20% | 70 | 0.300 | 800 | 580 | 7.96 |
| LSQPB251812T4R7M | BR L2518T4R7M | RoHS | 4.7 | ±20% | 60 | 0.400 | 700 | 470 | 7.96 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|-------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB251815T1R0M | BRHL2518T1R0M | RoHS | 1.0 | ±20% | 400 | 0.055 | 2,000 | 1,400 | 1.0 |
| LSQPB251815T1R5M | BRHL2518T1R5M | RoHS | 1.5 | ±20% | 350 | 0.085 | 1,700 | 1,100 | 1.0 |
| LSQPB251815T2R2M | BRHL2518T2R2M | RoHS | 2.2 | ±20% | 300 | 0.115 | 1,500 | 1,000 | 1.0 |
| LSQPB251815T3R3MD | BRHL2518T3R3MD | RoHS | 3.3 | ±20% | 200 | 0.165 | 1,200 | 800 | 1.0 |
| LSQPB251815T4R7MD | BRHL2518T4R7MD | RoHS | 4.7 | ±20% | 150 | 0.245 | 1,100 | 750 | 1.0 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μH] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (±30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------|----------------------|--|-----------------------------|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB251818T1R0M | BR C2518T1R0M | RoHS | 1.0 | ±20% | 280 | 0.050 | 2,550 | 1,650 | 1.0 |
| LSQPB251818T1R5M | BR C2518T1R5M | RoHS | 1.5 | ±20% | 230 | 0.080 | 2,100 | 1,300 | 1.0 |
| LSQPB251818T2R2M | BR C2518T2R2M | RoHS | 2.2 | ±20% | 200 | 0.120 | 1,800 | 1,000 | 1.0 |
| LSQPB251818T3R3M | BR C2518T3R3M | RoHS | 3.3 | ±20% | 150 | 0.175 | 1,450 | 860 | 1.0 |
| LSQPB251818T4R7M | BR C2518T4R7M | RoHS | 4.7 | ±20% | 100 | 0.230 | 1,250 | 750 | 1.0 |
| LSQPB251818T6R8M | BR C2518T6R8M | RoHS | 6.8 | ±20% | 45 | 0.280 | 1,050 | 680 | 1.0 |
| LSQPB251818T100K | BR C2518T100K | RoHS | 10 | ±10% | 20 | 0.350 | 890 | 610 | 1.0 |
| LSQPB251818T100M | BR C2518T100M | RoHS | 10 | ±20% | 20 | 0.350 | 890 | 610 | 1.0 |
| LSQPB251818T150K | BR C2518T150K | RoHS | 15 | ±10% | 13 | 0.430 | 760 | 550 | 1.0 |
| LSQPB251818T150M | BR C2518T150M | RoHS | 15 | ±20% | 13 | 0.430 | 760 | 550 | 1.0 |
| LSQPB251818T220K | BR C2518T220K | RoHS | 22 | ±10% | 10 | 0.560 | 640 | 490 | 1.0 |
| LSQPB251818T220M | BR C2518T220M | RoHS | 22 | ±20% | 10 | 0.560 | 640 | 490 | 1.0 |
| LSQPB251818T330K | BR C2518T330K | RoHS | 33 | ±10% | 8 | 0.850 | 560 | 390 | 1.0 |
| LSQPB251818T330M | BR C2518T330M | RoHS | 33 | ±20% | 8 | 0.850 | 560 | 390 | 1.0 |
| LSQPB251818T470K | BR C2518T470K | RoHS | 47 | ±10% | 6.5 | 1.45 | 410 | 300 | 1.0 |
| LSQPB251818T470M | BR C2518T470M | RoHS | 47 | ±20% | 6.5 | 1.45 | 410 | 300 | 1.0 |
| LSQPB251818T680K | BR C2518T680K | RoHS | 68 | ±10% | 5.5 | 2.40 | 340 | 230 | 1.0 |
| LSQPB251818T680M | BR C2518T680M | RoHS | 68 | ±20% | 5.5 | 2.40 | 340 | 230 | 1.0 |
| LSQPB251818T101K | BR C2518T101K | RoHS | 100 | ±10% | 4.5 | 3.60 | 300 | 190 | 1.0 |
| LSQPB251818T101M | BR C2518T101M | RoHS | 100 | ±20% | 4.5 | 3.60 | 300 | 190 | 1.0 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

PART NUMBER

3225(1210) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB322517TR27M | BR L3225TR27M | RoHS | 0.27 | $\pm 20\%$ | 390 | 0.022 | 4,500 | 2,850 | 7.96 |
| LSQPB322517TR36M | BR L3225TR36M | RoHS | 0.36 | $\pm 20\%$ | 350 | 0.025 | 4,300 | 2,750 | 7.96 |
| LSQPB322517TR51M | BR L3225TR51M | RoHS | 0.51 | $\pm 20\%$ | 270 | 0.029 | 3,600 | 2,550 | 7.96 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 20\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPB322517T1R0M | BR L3225T1R0M | RoHS | 1.0 | $\pm 20\%$ | 220 | 0.043 | 2,400 | 2,200 | 0.1 |
| LSQPB322517T1R5M | BR L3225T1R5M | RoHS | 1.5 | $\pm 20\%$ | 170 | 0.045 | 2,200 | 1,750 | 0.1 |
| LSQPB322517T2R2M | BR L3225T2R2M | RoHS | 2.2 | $\pm 20\%$ | 150 | 0.065 | 1,850 | 1,600 | 0.1 |
| LSQPB322517T3R3M | BR L3225T3R3M | RoHS | 3.3 | $\pm 20\%$ | 140 | 0.120 | 1,450 | 1,200 | 0.1 |
| LSQPB322517T4R7M | BR L3225T4R7M | RoHS | 4.7 | $\pm 20\%$ | 120 | 0.180 | 1,300 | 1,000 | 0.1 |
| LSQPB322517T6R8M | BR L3225T6R8M | RoHS | 6.8 | $\pm 20\%$ | 90 | 0.270 | 1,050 | 770 | 0.1 |
| LSQPB322517T100K | BR L3225T100K | RoHS | 10 | $\pm 10\%$ | 70 | 0.350 | 900 | 700 | 0.1 |
| LSQPB322517T100M | BR L3225T100M | RoHS | 10 | $\pm 20\%$ | 70 | 0.350 | 900 | 700 | 0.1 |
| LSQPB322517T150K | BR L3225T150K | RoHS | 15 | $\pm 10\%$ | 20 | 0.570 | 700 | 530 | 0.1 |
| LSQPB322517T150M | BR L3225T150M | RoHS | 15 | $\pm 20\%$ | 20 | 0.570 | 700 | 530 | 0.1 |
| LSQPB322517T220K | BR L3225T220K | RoHS | 22 | $\pm 10\%$ | 13 | 0.690 | 550 | 470 | 0.1 |
| LSQPB322517T220M | BR L3225T220M | RoHS | 22 | $\pm 20\%$ | 13 | 0.690 | 550 | 470 | 0.1 |
| LSQPB322517T330K | BR L3225T330K | RoHS | 33 | $\pm 10\%$ | 9 | 0.840 | 470 | 420 | 0.1 |
| LSQPB322517T330M | BR L3225T330M | RoHS | 33 | $\pm 20\%$ | 9 | 0.840 | 470 | 420 | 0.1 |
| LSQPB322517T470K | BR L3225T470K | RoHS | 47 | $\pm 10\%$ | 7 | 1.00 | 420 | 390 | 0.1 |
| LSQPB322517T470M | BR L3225T470M | RoHS | 47 | $\pm 20\%$ | 7 | 1.00 | 420 | 390 | 0.1 |
| LSQPB322517T680K | BR L3225T680K | RoHS | 68 | $\pm 10\%$ | 6 | 1.40 | 330 | 300 | 0.1 |
| LSQPB322517T680M | BR L3225T680M | RoHS | 68 | $\pm 20\%$ | 6 | 1.40 | 330 | 300 | 0.1 |
| LSQPB322517T101K | BR L3225T101K | RoHS | 100 | $\pm 10\%$ | 5 | 2.50 | 270 | 250 | 0.1 |
| LSQPB322517T101M | BR L3225T101M | RoHS | 100 | $\pm 20\%$ | 5 | 2.50 | 270 | 250 | 0.1 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

Wire-wound Ferrite Power Inductors LSQPB/LLQPB series


PACKAGING

① Minimum Quantity

| Type | Standard Quantity [pcs] | |
|--------|-------------------------|---------------|
| | Paper Tape | Embossed Tape |
| 160807 | — | 3,000 |
| 160808 | — | 3,000 |
| 201210 | — | 3,000 |
| 201214 | — | 2,000 |
| 201616 | — | 2,000 |
| 251810 | — | 3,000 |
| 251812 | — | 3,000 |
| 251815 | — | 2,000 |
| 251818 | — | 2,000 |
| 322517 | — | 2,000 |


② Tape Material

● Embossed tape

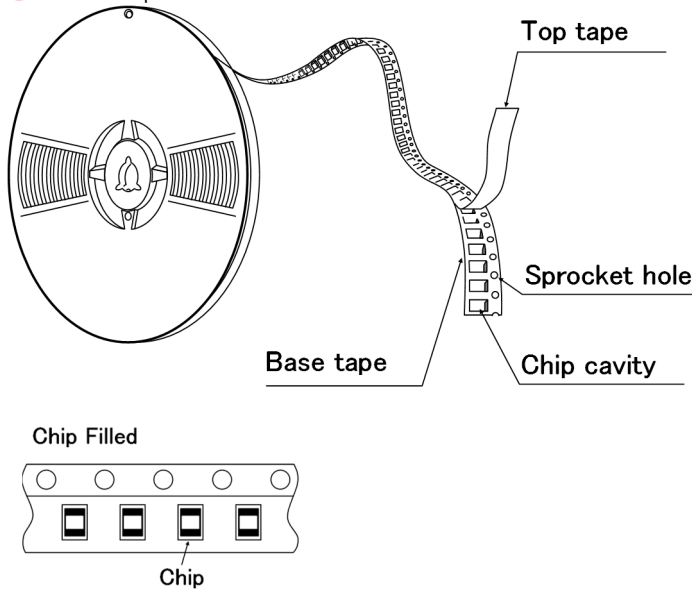

③ Taping dimensions

● Embossed Tape 8mm wide (0.315 inches wide)

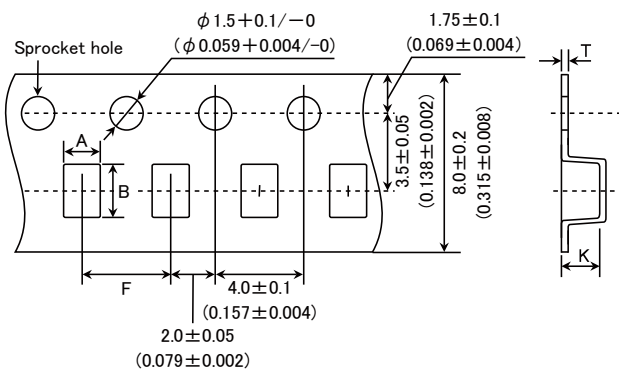


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


| Type | Chip cavity | | Insertion pitch | Tape thickness | |
|--------|---------------------------|---------------------------|--------------------------|----------------------------|-------------------------|
| | A | B | | T | K |
| 160807 | 1.1±0.1 (0.043±0.004) | 1.9±0.1 (0.075±0.004) | 4.0±0.1 (0.157±0.004) | 0.2±0.05 (0.008±0.002) | 0.9 max (0.035 max) |
| 160808 | 1.1±0.1 (0.043±0.004) | 1.9±0.1 (0.075±0.004) | 4.0±0.1 (0.157±0.004) | 0.25±0.05 (0.010±0.002) | 1.2 max (0.047 max) |
| 201210 | 1.45±0.1 (0.057±0.004) | 2.2±0.1 (0.087±0.004) | 4.0±0.1 (0.157±0.004) | 0.25±0.05 (0.010±0.002) | 1.2 max (0.047 max) |
| 201214 | 1.45±0.1 (0.057±0.004) | 2.37±0.1 (0.093±0.004) | 4.0±0.1 (0.157±0.004) | 0.25±0.05 (0.010±0.002) | 1.59 max (0.063 max) |
| 201616 | 1.75±0.1 (0.069±0.004) | 2.1±0.1 (0.083±0.004) | 4.0±0.1 (0.157±0.004) | 0.3±0.05 (0.012±0.002) | 1.9 max (0.075 max) |
| 251810 | 2.3±0.1 (0.091±0.004) | 2.8±0.1 (0.110±0.004) | 4.0±0.1 (0.157±0.004) | 0.25±0.05 (0.010±0.002) | 1.3 max (0.051 max) |
| 251812 | 2.3±0.1 (0.091±0.004) | 2.8±0.1 (0.110±0.004) | 4.0±0.1 (0.157±0.004) | 0.3±0.05 (0.012±0.002) | 1.45 max (0.057 max) |
| 251815 | 2.1±0.1 (0.083±0.004) | 2.8±0.1 (0.110±0.004) | 4.0±0.1 (0.157±0.004) | 0.3±0.05 (0.012±0.002) | 1.7 max (0.067 max) |
| 251818 | 2.15±0.1 (0.085±0.004) | 2.7±0.1 (0.106±0.004) | 4.0±0.1 (0.157±0.004) | 0.3±0.05 (0.012±0.002) | 2.2 max (0.087 max) |
| 322517 | 2.8±0.1 (0.110±0.004) | 3.5±0.1 (0.138±0.004) | 4.0±0.1 (0.157±0.004) | 0.25±0.05 (0.010±0.002) | 1.9 max (0.075 max) |

Unit : mm (inch)

④ Leader and Blank portion

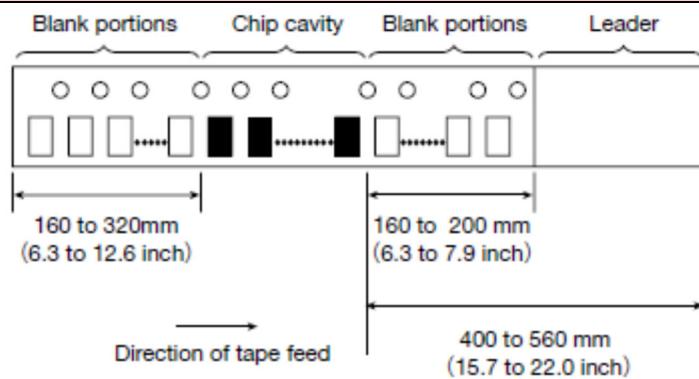


⑤ Reel size

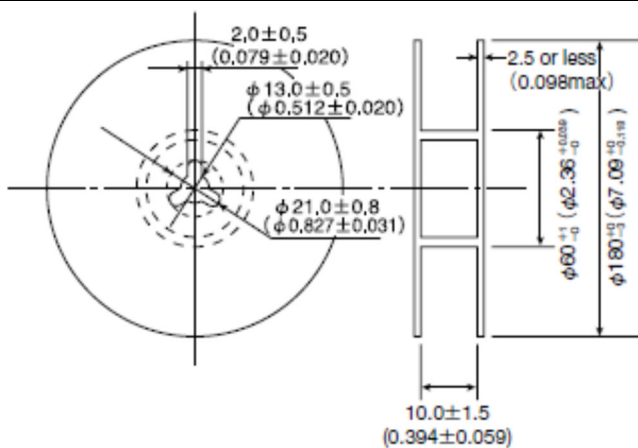


⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.0N in the direction of the arrow as illustrated below.

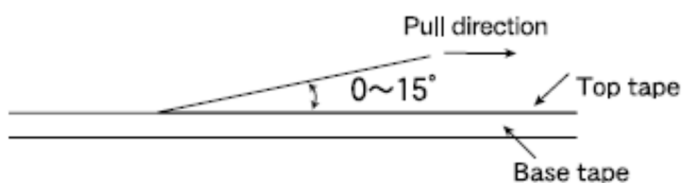

Wire-wound Ferrite Power Inductors LSQPB series for General Electronic Equipment for Consumer
Wire-wound Ferrite Power Inductors LLQPB series
for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

■ RELIABILITY DATA

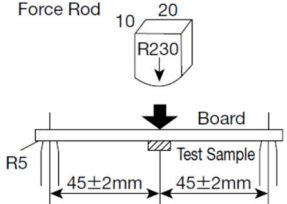
| 1. Operating Temperature Range | |
|--|--|
| Specified Value | -40~+105°C |
| Test Methods and Remarks | Including self-generated heat |
| 2. Storage Temperature Range (after soldering) | |
| Specified Value | -40~+85°C |
| Test Methods and Remarks | Please refer the term of "7.Storage conditions" in Precautions. |
| 3. Rated current | |
| Specified Value | Within the specified tolerance |
| 4. Inductance | |
| Specified Value | Within the specified tolerance |
| Test Methods and Remarks | Measuring equipment : LCR Meter (HP 4285A or equivalent) Measuring frequency : Specified frequency |
| 5. DC Resistance | |
| Specified Value | Within the specified tolerance |
| Test Methods and Remarks | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent) |
| 6. Self resonance frequency | |
| Specified Value | Within the specified tolerance |
| Test Methods and Remarks | Measuring equipment : Impedance analyzer/material analyzer (HP4291A or equivalent HP4191A, 4192A or equivalent) |
| 7. Temperature characteristic | |
| Specified Value | Inductance change : Within $\pm 15\%$ |
| Test Methods and Remarks | Based on the inductance at 20°C and Measured at the ambient of -40°C~+85°C. |
| 8. Resistance to the bendability | |
| Specified Value | No damage. |
| Test Methods and Remarks | The given sample is soldered on the board and then the back side of the board is pushed until it bends 2mm like the figure. Dimension of the board : 100 × 40 × 1.0mm (0.8mm thickness for 1608(0603) inductors) Material of the board : Glass epoxy-resin Thickness of soldering paste : 0.12mm  |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

9. Body strength

| | |
|--------------------------|--|
| Specified Value | No damage. |
| Test Methods and Remarks | 2012~ Applied orce : 10N Duration : 10sec. 1608 size Applied force : 5N Duration : 10sec. |

10. Adhesion of terminal electrodes

| | |
|--------------------------|--|
| Specified Value | Not to removed from the board. |
| Test Methods and Remarks | The given sample is soldered to the board and then it is kept for 5sec with 10N stress (5N for 1608(0603) inductors) like the figure.  |

11. Resistance to vibration

| | | | | | | | | | | | | | | | |
|--------------------------|--|---------------------------------------|---------|--|-----------------|--|--|-----------------|--------------------------------|--|------|---|---------------------------------------|---|---|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | |
| Test Methods and Remarks | The given sample is soldered to the board and then it is tested depending on the conditions of the following table. <table border="1" data-bbox="295 772 1173 952"> <tr> <td>Vibration Frequency</td> <td colspan="2">10~55Hz</td> </tr> <tr> <td>Total Amplitude</td> <td colspan="2">1.5mm (May not exceed acceleration 196m/s²)</td> </tr> <tr> <td>Sweeping Method</td> <td colspan="2">10Hz to 55Hz to 10Hz for 1min.</td> </tr> <tr> <td rowspan="3">Time</td> <td>X</td> <td rowspan="3">For 2 hours on each X, Y, and Z axis.</td> </tr> <tr> <td>Y</td> </tr> <tr> <td>Z</td> </tr> </table> <p>Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs.</p> | Vibration Frequency | 10~55Hz | | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | Time | X | For 2 hours on each X, Y, and Z axis. | Y | Z |
| Vibration Frequency | 10~55Hz | | | | | | | | | | | | | | |
| Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | | | | | | | | | | | | | |
| Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | | | | | | | | | | | | | |
| Time | X | For 2 hours on each X, Y, and Z axis. | | | | | | | | | | | | | |
| | Y | | | | | | | | | | | | | | |
| | Z | | | | | | | | | | | | | | |

12. Solderability

| | | | | | |
|--------------------------|---|--------------------|--------------------------|------|------------------|
| Specified Value | At least 90% area of the electrodes is covered by new solder. | | | | |
| Test Methods and Remarks | Test Method and Remarks】 The given sample is dipped into the flux and then it is tested depending on the conditions of the following table. Flux : Ethanol solution containing rosin 25%. <table border="1" data-bbox="295 1176 710 1232"> <tr> <td>Solder Temperature</td> <td>245\pm5$^{\circ}$C</td> </tr> <tr> <td>Time</td> <td>5\pm0.5 sec.</td> </tr> </table> | Solder Temperature | 245 \pm 5 $^{\circ}$ C | Time | 5 \pm 0.5 sec. |
| Solder Temperature | 245 \pm 5 $^{\circ}$ C | | | | |
| Time | 5 \pm 0.5 sec. | | | | |

13. Resistance to soldering heat

| | |
|--------------------------|---|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | 3 times reflow having the temperature profile of 5sec of 260 \pm 0/ -5° C and 40sec of more than 230 $^{\circ}$ C. Test board thickness : 1.0mm Test board material : Glass epoxy-resin Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |

14. Thermal shock

| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | | | | | |
|--------------------------|--|-----------------------|--|--|------|-----------------------------|----------------|---|-------------|------------|---|------------------|----------|---|-------------|------------|---|------------------|----------|
| Test Methods and Remarks | The given sample is soldered to the board and then its Inductance is measured after 100cycles of the following conditions. <table border="1" data-bbox="295 1668 901 1836"> <thead> <tr> <th colspan="3">Conditions of 1 cycle</th> </tr> <tr> <th>Step</th> <th>Temperature ($^{\circ}$C)</th> <th>Duration (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40\pm3</td> <td>30\pm3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>+85\pm2</td> <td>30\pm3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>Within 3</td> </tr> </tbody> </table> <p>Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.</p> | Conditions of 1 cycle | | | Step | Temperature ($^{\circ}$ C) | Duration (min) | 1 | -40 \pm 3 | 30 \pm 3 | 2 | Room temperature | Within 3 | 3 | +85 \pm 2 | 30 \pm 3 | 4 | Room temperature | Within 3 |
| Conditions of 1 cycle | | | | | | | | | | | | | | | | | | | |
| Step | Temperature ($^{\circ}$ C) | Duration (min) | | | | | | | | | | | | | | | | | |
| 1 | -40 \pm 3 | 30 \pm 3 | | | | | | | | | | | | | | | | | |
| 2 | Room temperature | Within 3 | | | | | | | | | | | | | | | | | |
| 3 | +85 \pm 2 | 30 \pm 3 | | | | | | | | | | | | | | | | | |
| 4 | Room temperature | Within 3 | | | | | | | | | | | | | | | | | |

15. Damp heat

| | |
|--|--|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | The given sample is soldered to the board and then it is kept at the following conditions. |
| | Temperature $60 \pm 2^\circ\text{C}$ |
| | Humidity 90~95%RH |
| | Time 1000 hours. |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. | |

16. Loading under damp heat

| | |
|--|--|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | The given sample is soldered to the board and then it is kept at the following conditions. |
| | Temperature $60 \pm 2^\circ\text{C}$ |
| | Humidity 90~95%RH |
| | Applied current Rated current |
| | Time 1000hours. |
| Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. | |

17. Low temperature life test

| | |
|--------------------------|--|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | The given sample is soldered to the board and then it is kept at the following conditions. |
| | Temperature $-40 \pm 2^\circ\text{C}$ |
| | Duration 1000hours |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |

18. High temperature life test

| | |
|--------------------------|--|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | The given sample is soldered to the board and then it is kept at the following conditions. |
| | Temperature $85 \pm 2^\circ\text{C}$ |
| | Duration 1000hours |
| | Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |

19. Standard conditions

| | |
|-----------------|--|
| Specified Value | Standard test condition : Unless otherwise specified, temperature is $20 \pm 15^\circ\text{C}$ and $65 \pm 20\%$ of relative humidity. When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^\circ\text{C}$ of temperature, $65 \pm 5\%$ relative humidity. Inductance is in accordance with our measured value. |
|-----------------|--|

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

Wire-wound Ferrite Power Inductors LSQPB/LLQPB series

■ PRECAUTIONS

1. Circuit Design

| | |
|-------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Verification of operating environment, electrical rating and performance <ol style="list-style-type: none"> 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications. 2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions. ◆ Operating Current (Verification of Rated current) <ol style="list-style-type: none"> 1. The operating current including inrush current for inductors must always be lower than their rated values. 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect. ◆ Temperature rise <p>Temperature rise of power choke coil depends on the installation condition in end products. Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p> |
|-------------|---|

2. PCB Design

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Land pattern design <ol style="list-style-type: none"> 1. Please refer to a recommended land pattern. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Land pattern design Surface Mounting <ol style="list-style-type: none"> 1. The conditions of the picking and placing should be checked in advance. 2. The products are only for reflow soldering. |

3. Considerations for automatic placement

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine <ol style="list-style-type: none"> 1. Excessive physical impact should not be imposed on the products for picking and placing onto the PC boards. 2. Mounting and soldering conditions should be checked in advance. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine <p>The products might be broken if too much stress is given for the picking and placing.</p> |

4. Soldering

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Reflow soldering <ol style="list-style-type: none"> 1. Please apply our recommended soldering conditions on the specification as much as possible. 2. The products are only for reflow soldering. 3. Please do not give any stress to a product until it returns in room temperature after reflow soldering. ◆ Recommended conditions for using a soldering iron. (Excluding 1608 type) <p>Touch a soldering iron to the land pattern not to the product directly. The temperature of a soldering iron is less than 350degC. The soldering is for 3 seconds or less.</p> |
| Technical considerations | <ul style="list-style-type: none"> ◆ Reflow soldering <ol style="list-style-type: none"> 1. The product might break or might make the tombstoning, if the soldering conditions are too far from our recommended conditions. <p style="text-align: center;">Temperature [°C]</p> <p style="text-align: center;">Heating Time [sec]</p> |

5. Cleaning

| | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆ Cleaning conditions <ol style="list-style-type: none"> 1. Please don't wash by the ultra-sonic waves. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Cleaning conditions <ol style="list-style-type: none"> 1. Washing by the ultra-sonic waves might break the product. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

6. Handling

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. Keep the product away from any magnets. ◆ Cutting the PC boards <ol style="list-style-type: none"> 1. Please don't give any stress of the bending or the twisting for the cutting process of PC boards. 2. Please don't give any shock and stress to the products in transportation. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. Please don't give too much shock to the product. 2. Please don't give any shock and stress to the products in transportation. ◆ The stress for picking and placing <ol style="list-style-type: none"> 1. Please don't give any shock into an exposed ferrite core. ◆ Packing <ol style="list-style-type: none"> 1. Please don't pile the packing boxes up as much as possible. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Handling <ol style="list-style-type: none"> 1. There is a case that a characteristic varies with magnetic influence. ◆ Cutting the PC boards <ol style="list-style-type: none"> 1. Please don't give the bending stress or the twisting stress to the products because they might break in such cases. ◆ Mechanical considerations <ol style="list-style-type: none"> 1. The mechanical shock might break the products. 2. The products might break depending on the handling in transportation. ◆ Pick-up pressure <ol style="list-style-type: none"> 1. The electrical characteristics of the products might be shifted by too much physical shock and stress. ◆ Packing <ol style="list-style-type: none"> 1. The products and the tape might break, if the packing boxes are piled up. |

7. Storage conditions

| | |
|--------------------------|--|
| Precautions | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. <ul style="list-style-type: none"> ▪ Recommended conditions <ul style="list-style-type: none"> Ambient temperature : 0~40°C Humidity : Below 70% RH ▪ The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. <ul style="list-style-type: none"> For this reason, product should be used within 6 months from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Storage <ol style="list-style-type: none"> 1. The ambient of high temperature or high humidity might accelerate to make the solderability and the tape worse. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

Wire-wound Ferrite Power Inductors LSQN/LSQPA series for General Electronic Equipment for Consumer

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

REFLOW

PART NUMBER

* Operating Temp.: -40~+105°C (Including self-generated heat)

| | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| L | S | Q | N | A | 2 | 0 | 1 | 2 | 1 | 2 | T | 1 | 0 | 0 | M | | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | | | | | | | | | |

① Series

| Code (1)(2)(3)(4) | |
|----------------------|---|
| LSQN | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |
| LSQP | Wire-wound Ferrite Power Inductor for General Electronic Equipment for Consumer |

(1) Product Group

| Code | |
|------|-----------|
| L | Inductors |

(2) Category

| Code | Recommended equipment | Quality Grade |
|------|---|---------------|
| S | General Electronic Equipment for Consumer | 3 |

② Features

| Code | Feature |
|------|---|
| A | 5-surface electrode (Ag-resin × Sn-plate) |
| B | L-shape electrode (Ag-resin × Sn-plate) |

③ Dimensions (L × W)

| Code | Type (inch) | Dimensions (L × W) [mm] |
|------|-------------|----------------------------|
| 1608 | 1608 (0603) | 1.6 × 0.8 |
| 2012 | 2012 (0805) | 2.0 × 1.25 |
| 2016 | 2016 (0806) | 2.0 × 1.6 |
| 2518 | 2518 (1007) | 2.5 × 1.8 |
| 3225 | 3225 (1210) | 3.2 × 2.5 |

④ Dimensions (T)

| Code | Dimensions (T) [mm] |
|------|---------------------|
| 08 | 0.8 |
| 09 | 0.9 |
| 12 | 1.25 |
| 16 | 1.6 |
| 18 | 1.8 |
| 25 | 2.5 |

(3) Type

| Code | |
|------|--------------------------------------|
| Q | Ferrite Wire-wound (Horizontal type) |

(4) Features, Characteristics

| Code | |
|------|--------------------------|
| N | Standard Power choke |
| P | High current power choke |

⑤ Packaging

| Code | Packaging |
|------|-----------|
| T | Taping |

⑥ Nominal inductance

| Code (example) | Nominal inductance [μH] |
|-------------------|-------------------------|
| 1R0 | 1.0 |
| 100 | 10 |
| 101 | 100 |

※R=Decimal point

⑦ Inductance tolerance

| Code | Inductance tolerance |
|------|----------------------|
| K | ±10% |
| M | ±20% |


⑧ Special code

| Code | Special code |
|------|--------------|
| R | Low Rdc type |


⑨ Internal code

STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY

5-surface electrode




L-shape electrode



Recommended Land Patterns

Surface Mounting

- Mounting and soldering conditions should be checked beforehand.
- Applicable soldering process to these products is reflow soldering only.



| Type | A | B | C |
|-------|------|-----|------|
| B1608 | 0.55 | 0.7 | 1.0 |
| A2012 | 0.60 | 1.0 | 1.45 |
| A2016 | 0.60 | 1.0 | 1.8 |
| A2518 | 0.60 | 1.5 | 2.0 |
| A3225 | 0.85 | 1.7 | 2.7 |

Unit : mm

| Type | L | W | T | e | Standard quantity [pcs] | |
|---------|--------------------------|---------------------------|---------------------------|----------------------------|-------------------------|---------------|
| | | | | | Paper tape | Embossed tape |
| B160808 | 1.6±0.2 (0.063±0.008) | 0.8±0.2 (0.031±0.008) | 0.8±0.2 (0.031±0.008) | 0.45±0.15 (0.016±0.006) | — | 3000 |
| A201209 | 2.0±0.2 (0.079±0.008) | 1.25±0.2 (0.049±0.008) | 0.9±0.1 (0.035±0.004) | 0.5±0.2 (0.020±0.008) | 4000 | — |
| A201212 | 2.0±0.2 (0.079±0.008) | 1.25±0.2 (0.049±0.008) | 1.25±0.2 (0.049±0.008) | 0.5±0.2 (0.020±0.008) | — | 3000 |
| A201616 | 2.0±0.2 (0.079±0.008) | 1.6±0.2 (0.063±0.008) | 1.6±0.2 (0.063±0.008) | 0.5±0.2 (0.020±0.008) | — | 2000 |
| A251818 | 2.5±0.2 (0.098±0.008) | 1.8±0.2 (0.071±0.008) | 1.8±0.2 (0.071±0.008) | 0.5±0.2 (0.020±0.008) | — | 2000 |
| A322525 | 3.2±0.2 (0.126±0.008) | 2.5±0.2 (0.098±0.008) | 2.5±0.2 (0.098±0.008) | 0.6±0.3 (0.024±0.012) | — | 1000 |

Unit : mm (inch)

■ PART NUMBER

● 1608 (0603) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (\pm 30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQNB160808T1R0M | CBMF1608T1R0M | RoHS | 1.0 | \pm 20% | 100 | 0.09 | 290 | 770 | 7.96 |
| LSQNB160808T2R2M | CBMF1608T2R2M | RoHS | 2.2 | \pm 20% | 80 | 0.17 | 190 | 560 | 7.96 |
| LSQNB160808T3R3M | CBMF1608T3R3M | RoHS | 3.3 | \pm 20% | 60 | 0.22 | 170 | 500 | 7.96 |
| LSQNB160808T4R7M | CBMF1608T4R7M | RoHS | 4.7 | \pm 20% | 45 | 0.24 | 145 | 470 | 7.96 |
| LSQNB160808T100K | CBMF1608T100K | RoHS | 10 | \pm 10% | 32 | 0.36 | 115 | 380 | 2.52 |
| LSQNB160808T100M | CBMF1608T100M | RoHS | 10 | \pm 20% | 32 | 0.36 | 115 | 380 | 2.52 |
| LSQNB160808T220K | CBMF1608T220K | RoHS | 22 | \pm 10% | 16 | 1.0 | 70 | 230 | 2.52 |
| LSQNB160808T220M | CBMF1608T220M | RoHS | 22 | \pm 20% | 16 | 1.0 | 70 | 230 | 2.52 |
| LSQNB160808T470K | CBMF1608T470K | RoHS | 47 | \pm 10% | 11 | 2.5 | 50 | 140 | 2.52 |
| LSQNB160808T470M | CBMF1608T470M | RoHS | 47 | \pm 20% | 11 | 2.5 | 50 | 140 | 2.52 |

● 2012 (0805) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (\pm 30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|-------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|----------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQNA201212T1R0M | CB 2012T1R0M | RoHS | 1.0 | \pm 20% | 100 | 0.15 | 500 | 900 | 7.96 |
| LSQNA201212T2R2M | CB 2012T2R2M | RoHS | 2.2 | \pm 20% | 80 | 0.23 | 410 | 770 | 7.96 |
| LSQNA201212T3R3M | CB 2012T3R3M | RoHS | 3.3 | \pm 20% | 55 | 0.30 | 330 | 650 | 7.96 |
| LSQNA201212T4R7M | CB 2012T4R7M | RoHS | 4.7 | \pm 20% | 45 | 0.40 | 300 | 580 | 7.96 |
| LSQNA201212T6R8M | CB 2012T6R8M | RoHS | 6.8 | \pm 20% | 38 | 0.47 | 250 | 540 | 7.96 |
| LSQNA201212T100K | CB 2012T100K | RoHS | 10 | \pm 10% | 32 | 0.70 | 190 | 440 | 2.52 |
| LSQNA201212T100M | CB 2012T100M | RoHS | 10 | \pm 20% | 32 | 0.70 | 190 | 440 | 2.52 |
| LSQNA201212T100KR | CB 2012T100KR | RoHS | 10 | \pm 10% | 32 | 0.50 | 200 | 520 | 2.52 |
| LSQNA201212T100MR | CB 2012T100MR | RoHS | 10 | \pm 20% | 32 | 0.50 | 200 | 520 | 2.52 |
| LSQNA201212T150K | CB 2012T150K | RoHS | 15 | \pm 10% | 28 | 1.3 | 170 | 320 | 2.52 |
| LSQNA201212T150M | CB 2012T150M | RoHS | 15 | \pm 20% | 28 | 1.3 | 170 | 320 | 2.52 |
| LSQNA201212T220K | CB 2012T220K | RoHS | 22 | \pm 10% | 16 | 1.7 | 135 | 280 | 2.52 |
| LSQNA201212T220M | CB 2012T220M | RoHS | 22 | \pm 20% | 16 | 1.7 | 135 | 280 | 2.52 |
| LSQNA201212T470K | CB 2012T470K | RoHS | 47 | \pm 10% | 11 | 3.7 | 90 | 190 | 2.52 |
| LSQNA201212T470M | CB 2012T470M | RoHS | 47 | \pm 20% | 11 | 3.7 | 90 | 190 | 2.52 |
| LSQNA201212T680K | CB 2012T680K | RoHS | 68 | \pm 10% | 10 | 6.0 | 70 | 140 | 2.52 |
| LSQNA201212T680M | CB 2012T680M | RoHS | 68 | \pm 20% | 10 | 6.0 | 70 | 140 | 2.52 |
| LSQNA201212T101K | CB 2012T101K | RoHS | 100 | \pm 10% | 8 | 7.0 | 60 | 130 | 0.796 |
| LSQNA201212T101M | CB 2012T101M | RoHS | 100 | \pm 20% | 8 | 7.0 | 60 | 130 | 0.796 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (\pm 30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPA201212T1R0M | CB C2012T1R0M | RoHS | 1.0 | \pm 20% | 100 | 0.19 | 700 | 840 | 7.96 |
| LSQPA201212T2R2M | CB C2012T2R2M | RoHS | 2.2 | \pm 20% | 70 | 0.33 | 530 | 640 | 7.96 |
| LSQPA201212T4R7M | CB C2012T4R7M | RoHS | 4.7 | \pm 20% | 45 | 0.50 | 360 | 520 | 7.96 |
| LSQPA201212T100K | CB C2012T100K | RoHS | 10 | \pm 10% | 40 | 1.2 | 240 | 340 | 2.52 |
| LSQPA201212T100M | CB C2012T100M | RoHS | 10 | \pm 20% | 40 | 1.2 | 240 | 340 | 2.52 |
| LSQPA201212T220K | CB C2012T220K | RoHS | 22 | \pm 10% | 16 | 3.7 | 170 | 190 | 2.52 |
| LSQPA201212T220M | CB C2012T220M | RoHS | 22 | \pm 20% | 16 | 3.7 | 170 | 190 | 2.52 |
| LSQPA201212T470K | CB C2012T470K | RoHS | 47 | \pm 10% | 11 | 5.8 | 120 | 150 | 2.52 |
| LSQPA201212T470M | CB C2012T470M | RoHS | 47 | \pm 20% | 11 | 5.8 | 120 | 150 | 2.52 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] (\pm 30%) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQNA201209T1R0M | CB L2012T1R0M | RoHS | 1.0 | \pm 20% | 100 | 0.15 | 620 | 950 | 0.1 |
| LSQNA201209T2R2M | CB L2012T2R2M | RoHS | 2.2 | \pm 20% | 80 | 0.39 | 440 | 590 | 0.1 |
| LSQNA201209T4R7M | CB L2012T4R7M | RoHS | 4.7 | \pm 20% | 45 | 0.66 | 275 | 490 | 0.1 |
| LSQNA201209T100M | CB L2012T100M | RoHS | 10 | \pm 20% | 32 | 1.0 | 205 | 370 | 0.1 |
| LSQNA201209T220M | CB L2012T220M | RoHS | 22 | \pm 20% | 23 | 2.1 | 150 | 250 | 0.1 |
| LSQNA201209T470M | CB L2012T470M | RoHS | 47 | \pm 20% | 11 | 4.2 | 100 | 140 | 0.1 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

PART NUMBER

2016 (0806) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQNA201616T1R0M | CB 2016T1R0M | RoHS | 1.0 | $\pm 20\%$ | 100 | 0.09 | 600 | 1,100 | 7.96 |
| LSQNA201616T1R5M | CB 2016T1R5M | RoHS | 1.5 | $\pm 20\%$ | 80 | 0.11 | 550 | 1,000 | 7.96 |
| LSQNA201616T2R2M | CB 2016T2R2M | RoHS | 2.2 | $\pm 20\%$ | 70 | 0.13 | 510 | 1,000 | 7.96 |
| LSQNA201616T3R3M | CB 2016T3R3M | RoHS | 3.3 | $\pm 20\%$ | 55 | 0.20 | 400 | 800 | 7.96 |
| LSQNA201616T4R7M | CB 2016T4R7M | RoHS | 4.7 | $\pm 20\%$ | 45 | 0.25 | 340 | 740 | 7.96 |
| LSQNA201616T6R8M | CB 2016T6R8M | RoHS | 6.8 | $\pm 20\%$ | 38 | 0.35 | 300 | 600 | 7.96 |
| LSQNA201616T100K | CB 2016T100K | RoHS | 10 | $\pm 10\%$ | 32 | 0.50 | 250 | 520 | 2.52 |
| LSQNA201616T100M | CB 2016T100M | RoHS | 10 | $\pm 20\%$ | 32 | 0.50 | 250 | 520 | 2.52 |
| LSQNA201616T150K | CB 2016T150K | RoHS | 15 | $\pm 10\%$ | 28 | 0.70 | 210 | 440 | 2.52 |
| LSQNA201616T150M | CB 2016T150M | RoHS | 15 | $\pm 20\%$ | 28 | 0.70 | 210 | 440 | 2.52 |
| LSQNA201616T220K | CB 2016T220K | RoHS | 22 | $\pm 10\%$ | 16 | 1.0 | 165 | 370 | 2.52 |
| LSQNA201616T220M | CB 2016T220M | RoHS | 22 | $\pm 20\%$ | 16 | 1.0 | 165 | 370 | 2.52 |
| LSQNA201616T330K | CB 2016T330K | RoHS | 33 | $\pm 10\%$ | 14 | 1.7 | 130 | 270 | 2.52 |
| LSQNA201616T330M | CB 2016T330M | RoHS | 33 | $\pm 20\%$ | 14 | 1.7 | 130 | 270 | 2.52 |
| LSQNA201616T470K | CB 2016T470K | RoHS | 47 | $\pm 10\%$ | 11 | 2.4 | 110 | 240 | 2.52 |
| LSQNA201616T470M | CB 2016T470M | RoHS | 47 | $\pm 20\%$ | 11 | 2.4 | 110 | 240 | 2.52 |
| LSQNA201616T680K | CB 2016T680K | RoHS | 68 | $\pm 10\%$ | 10 | 3.0 | 90 | 210 | 2.52 |
| LSQNA201616T680M | CB 2016T680M | RoHS | 68 | $\pm 20\%$ | 10 | 3.0 | 90 | 210 | 2.52 |
| LSQNA201616T101K | CB 2016T101K | RoHS | 100 | $\pm 10\%$ | 8 | 4.5 | 70 | 170 | 0.796 |
| LSQNA201616T101M | CB 2016T101M | RoHS | 100 | $\pm 20\%$ | 8 | 4.5 | 70 | 170 | 0.796 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPA201616T1R0M | CB C2016T1R0M | RoHS | 1.0 | $\pm 20\%$ | 100 | 0.10 | 1,100 | 1,100 | 7.96 |
| LSQPA201616T1R5M | CB C2016T1R5M | RoHS | 1.5 | $\pm 20\%$ | 80 | 0.15 | 1,000 | 1,000 | 7.96 |
| LSQPA201616T2R2M | CB C2016T2R2M | RoHS | 2.2 | $\pm 20\%$ | 70 | 0.20 | 750 | 720 | 7.96 |
| LSQPA201616T3R3M | CB C2016T3R3M | RoHS | 3.3 | $\pm 20\%$ | 55 | 0.27 | 600 | 610 | 7.96 |
| LSQPA201616T4R7M | CB C2016T4R7M | RoHS | 4.7 | $\pm 20\%$ | 45 | 0.37 | 550 | 530 | 7.96 |
| LSQPA201616T6R8M | CB C2016T6R8M | RoHS | 6.8 | $\pm 20\%$ | 38 | 0.59 | 450 | 450 | 7.96 |
| LSQPA201616T100K | CB C2016T100K | RoHS | 10 | $\pm 10\%$ | 32 | 0.82 | 380 | 350 | 2.52 |
| LSQPA201616T100M | CB C2016T100M | RoHS | 10 | $\pm 20\%$ | 32 | 0.82 | 380 | 350 | 2.52 |
| LSQPA201616T150K | CB C2016T150K | RoHS | 15 | $\pm 10\%$ | 28 | 1.2 | 300 | 300 | 2.52 |
| LSQPA201616T150M | CB C2016T150M | RoHS | 15 | $\pm 20\%$ | 28 | 1.2 | 300 | 300 | 2.52 |
| LSQPA201616T220K | CB C2016T220K | RoHS | 22 | $\pm 10\%$ | 16 | 1.8 | 250 | 240 | 2.52 |
| LSQPA201616T220M | CB C2016T220M | RoHS | 22 | $\pm 20\%$ | 16 | 1.8 | 250 | 240 | 2.52 |
| LSQPA201616T330K | CB C2016T330K | RoHS | 33 | $\pm 10\%$ | 14 | 2.8 | 220 | 220 | 2.52 |
| LSQPA201616T330M | CB C2016T330M | RoHS | 33 | $\pm 20\%$ | 14 | 2.8 | 220 | 220 | 2.52 |
| LSQPA201616T470K | CB C2016T470K | RoHS | 47 | $\pm 10\%$ | 11 | 4.3 | 150 | 150 | 2.52 |
| LSQPA201616T470M | CB C2016T470M | RoHS | 47 | $\pm 20\%$ | 11 | 4.3 | 150 | 150 | 2.52 |
| LSQPA201616T680K | CB C2016T680K | RoHS | 68 | $\pm 10\%$ | 10 | 7.0 | 130 | 130 | 2.52 |
| LSQPA201616T680M | CB C2016T680M | RoHS | 68 | $\pm 20\%$ | 10 | 7.0 | 130 | 130 | 2.52 |
| LSQPA201616T101K | CB C2016T101K | RoHS | 100 | $\pm 10\%$ | 8 | 8.0 | 110 | 110 | 0.796 |
| LSQPA201616T101M | CB C2016T101M | RoHS | 100 | $\pm 20\%$ | 8 | 8.0 | 110 | 110 | 0.796 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

PART NUMBER

●2518(1007) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|-------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQNA251818T1R0M | CB 2518T1R0M | RoHS | 1.0 | $\pm 20\%$ | 100 | 0.06 | 1,200 | 1,500 | 7.96 |
| LSQNA251818T1R5M | CB 2518T1R5M | RoHS | 1.5 | $\pm 20\%$ | 80 | 0.07 | 650 | 1,400 | 7.96 |
| LSQNA251818T2R2M | CB 2518T2R2M | RoHS | 2.2 | $\pm 20\%$ | 68 | 0.09 | 510 | 1,300 | 7.96 |
| LSQNA251818T3R3M | CB 2518T3R3M | RoHS | 3.3 | $\pm 20\%$ | 54 | 0.11 | 440 | 1,200 | 7.96 |
| LSQNA251818T4R7MR | CB 2518T4R7MR | RoHS | 4.7 | $\pm 20\%$ | 46 | 0.10 | 310 | 1,200 | 7.96 |
| LSQNA251818T4R7M | CB 2518T4R7M | RoHS | 4.7 | $\pm 20\%$ | 46 | 0.13 | 340 | 1,100 | 7.96 |
| LSQNA251818T6R8M | CB 2518T6R8M | RoHS | 6.8 | $\pm 20\%$ | 38 | 0.15 | 270 | 930 | 7.96 |
| LSQNA251818T100K | CB 2518T100K | RoHS | 10 | $\pm 10\%$ | 30 | 0.25 | 250 | 820 | 2.52 |
| LSQNA251818T100M | CB 2518T100M | RoHS | 10 | $\pm 20\%$ | 30 | 0.25 | 250 | 820 | 2.52 |
| LSQNA251818T150K | CB 2518T150K | RoHS | 15 | $\pm 10\%$ | 23 | 0.32 | 180 | 650 | 2.52 |
| LSQNA251818T150M | CB 2518T150M | RoHS | 15 | $\pm 20\%$ | 23 | 0.32 | 180 | 650 | 2.52 |
| LSQNA251818T220K | CB 2518T220K | RoHS | 22 | $\pm 10\%$ | 19 | 0.50 | 165 | 580 | 2.52 |
| LSQNA251818T220M | CB 2518T220M | RoHS | 22 | $\pm 20\%$ | 19 | 0.50 | 165 | 580 | 2.52 |
| LSQNA251818T330K | CB 2518T330K | RoHS | 33 | $\pm 10\%$ | 15 | 0.70 | 130 | 460 | 2.52 |
| LSQNA251818T330M | CB 2518T330M | RoHS | 33 | $\pm 20\%$ | 15 | 0.70 | 130 | 460 | 2.52 |
| LSQNA251818T470K | CB 2518T470K | RoHS | 47 | $\pm 10\%$ | 12 | 0.95 | 110 | 420 | 2.52 |
| LSQNA251818T470M | CB 2518T470M | RoHS | 47 | $\pm 20\%$ | 12 | 0.95 | 110 | 420 | 2.52 |
| LSQNA251818T680K | CB 2518T680K | RoHS | 68 | $\pm 10\%$ | 9.5 | 1.5 | 70 | 310 | 2.52 |
| LSQNA251818T680M | CB 2518T680M | RoHS | 68 | $\pm 20\%$ | 9.5 | 1.5 | 70 | 310 | 2.52 |
| LSQNA251818T101K | CB 2518T101K | RoHS | 100 | $\pm 10\%$ | 9.0 | 2.1 | 60 | 260 | 0.796 |
| LSQNA251818T101M | CB 2518T101M | RoHS | 100 | $\pm 20\%$ | 9.0 | 2.1 | 60 | 260 | 0.796 |
| LSQNA251818T151K | CB 2518T151K | RoHS | 150 | $\pm 10\%$ | 7.0 | 3.2 | 55 | 210 | 0.796 |
| LSQNA251818T151M | CB 2518T151M | RoHS | 150 | $\pm 20\%$ | 7.0 | 3.2 | 55 | 210 | 0.796 |
| LSQNA251818T221K | CB 2518T221K | RoHS | 220 | $\pm 10\%$ | 5.5 | 4.5 | 50 | 180 | 0.796 |
| LSQNA251818T221M | CB 2518T221M | RoHS | 220 | $\pm 20\%$ | 5.5 | 4.5 | 50 | 180 | 0.796 |
| LSQNA251818T331K | CB 2518T331K | RoHS | 330 | $\pm 10\%$ | 4.5 | 7.0 | 40 | 140 | 0.796 |
| LSQNA251818T331M | CB 2518T331M | RoHS | 330 | $\pm 20\%$ | 4.5 | 7.0 | 40 | 140 | 0.796 |
| LSQNA251818T471K | CB 2518T471K | RoHS | 470 | $\pm 10\%$ | 3.5 | 10 | 35 | 120 | 0.796 |
| LSQNA251818T471M | CB 2518T471M | RoHS | 470 | $\pm 20\%$ | 3.5 | 10 | 35 | 120 | 0.796 |
| LSQNA251818T681K | CB 2518T681K | RoHS | 680 | $\pm 10\%$ | 3.0 | 17 | 30 | 90 | 0.796 |
| LSQNA251818T681M | CB 2518T681M | RoHS | 680 | $\pm 20\%$ | 3.0 | 17 | 30 | 90 | 0.796 |
| LSQNA251818T102K | CB 2518T102K | RoHS | 1000 | $\pm 10\%$ | 2.4 | 24 | 25 | 75 | 0.252 |
| LSQNA251818T102M | CB 2518T102M | RoHS | 1000 | $\pm 20\%$ | 2.4 | 24 | 25 | 75 | 0.252 |

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPA251818T1R0M | CB C2518T1R0M | RoHS | 1.0 | $\pm 20\%$ | 100 | 0.08 | 1,000 | 1,200 | 7.96 |
| LSQPA251818T1R5M | CB C2518T1R5M | RoHS | 1.5 | $\pm 20\%$ | 80 | 0.11 | 950 | 1,190 | 7.96 |
| LSQPA251818T2R2M | CB C2518T2R2M | RoHS | 2.2 | $\pm 20\%$ | 68 | 0.13 | 890 | 1,100 | 7.96 |
| LSQPA251818T3R3M | CB C2518T3R3M | RoHS | 3.3 | $\pm 20\%$ | 54 | 0.16 | 730 | 1,020 | 7.96 |
| LSQPA251818T4R7M | CB C2518T4R7M | RoHS | 4.7 | $\pm 20\%$ | 41 | 0.20 | 680 | 920 | 7.96 |
| LSQPA251818T6R8M | CB C2518T6R8M | RoHS | 6.8 | $\pm 20\%$ | 38 | 0.30 | 550 | 740 | 7.96 |
| LSQPA251818T100K | CB C2518T100K | RoHS | 10 | $\pm 10\%$ | 30 | 0.36 | 480 | 680 | 2.52 |
| LSQPA251818T100M | CB C2518T100M | RoHS | 10 | $\pm 20\%$ | 30 | 0.36 | 480 | 680 | 2.52 |
| LSQPA251818T150K | CB C2518T150K | RoHS | 15 | $\pm 10\%$ | 23 | 0.65 | 350 | 500 | 2.52 |
| LSQPA251818T150M | CB C2518T150M | RoHS | 15 | $\pm 20\%$ | 23 | 0.65 | 350 | 500 | 2.52 |
| LSQPA251818T220K | CB C2518T220K | RoHS | 22 | $\pm 10\%$ | 19 | 0.77 | 320 | 460 | 2.52 |
| LSQPA251818T220M | CB C2518T220M | RoHS | 22 | $\pm 20\%$ | 19 | 0.77 | 320 | 460 | 2.52 |
| LSQPA251818T330K | CB C2518T330K | RoHS | 33 | $\pm 10\%$ | 15 | 1.5 | 270 | 320 | 2.52 |
| LSQPA251818T330M | CB C2518T330M | RoHS | 33 | $\pm 20\%$ | 15 | 1.5 | 270 | 320 | 2.52 |
| LSQPA251818T470K | CB C2518T470K | RoHS | 47 | $\pm 10\%$ | 12 | 1.9 | 240 | 290 | 2.52 |
| LSQPA251818T470M | CB C2518T470M | RoHS | 47 | $\pm 20\%$ | 12 | 1.9 | 240 | 290 | 2.52 |
| LSQPA251818T680K | CB C2518T680K | RoHS | 68 | $\pm 10\%$ | 9.5 | 2.8 | 200 | 200 | 2.52 |
| LSQPA251818T680M | CB C2518T680M | RoHS | 68 | $\pm 20\%$ | 9.5 | 2.8 | 200 | 200 | 2.52 |
| LSQPA251818T101K | CB C2518T101K | RoHS | 100 | $\pm 10\%$ | 9.0 | 3.7 | 160 | 170 | 0.796 |
| LSQPA251818T101M | CB C2518T101M | RoHS | 100 | $\pm 20\%$ | 9.0 | 3.7 | 160 | 170 | 0.796 |
| LSQPA251818T151K | CB C2518T151K | RoHS | 150 | $\pm 10\%$ | 7.0 | 6.1 | 140 | 130 | 0.796 |
| LSQPA251818T151M | CB C2518T151M | RoHS | 150 | $\pm 20\%$ | 7.0 | 6.1 | 140 | 130 | 0.796 |
| LSQPA251818T221K | CB C2518T221K | RoHS | 220 | $\pm 10\%$ | 5.5 | 8.4 | 115 | 110 | 0.796 |
| LSQPA251818T221M | CB C2518T221M | RoHS | 220 | $\pm 20\%$ | 5.5 | 8.4 | 115 | 110 | 0.796 |
| LSQPA251818T331K | CB C2518T331K | RoHS | 330 | $\pm 10\%$ | 4.5 | 12.3 | 100 | 90 | 0.796 |
| LSQPA251818T331M | CB C2518T331M | RoHS | 330 | $\pm 20\%$ | 4.5 | 12.3 | 100 | 90 | 0.796 |
| LSQPA251818T471K | CB C2518T471K | RoHS | 470 | $\pm 10\%$ | 3.5 | 22 | 80 | 70 | 0.796 |
| LSQPA251818T471M | CB C2518T471M | RoHS | 470 | $\pm 20\%$ | 3.5 | 22 | 80 | 70 | 0.796 |
| LSQPA251818T681K | CB C2518T681K | RoHS | 680 | $\pm 10\%$ | 3.0 | 28 | 65 | 60 | 0.796 |
| LSQPA251818T681M | CB C2518T681M | RoHS | 680 | $\pm 20\%$ | 3.0 | 28 | 65 | 60 | 0.796 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

PART NUMBER

●3225(1210) type

| New part number | Old part number (for reference) | EHS | Nominal inductance [μ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [Ω] ($\pm 30\%$) | Rated current ※) [mA] | | Measuring frequency [MHz] |
|-------------------|------------------------------------|------|----------------------------------|----------------------|--|--|----------------------------|-------------------------------------|------------------------------|
| | | | | | | | Saturation current Idc1 | Temperature rise current Idc2 | |
| LSQPA322525T1R0MR | CB C3225T1R0MR | RoHS | 1.0 | $\pm 20\%$ | 250 | 0.055 | 2,000 | 1,440 | 0.1 |
| LSQPA322525T1R5MR | CB C3225T1R5MR | RoHS | 1.5 | $\pm 20\%$ | 220 | 0.060 | 2,000 | 1,310 | 0.1 |
| LSQPA322525T2R2MR | CB C3225T2R2MR | RoHS | 2.2 | $\pm 20\%$ | 190 | 0.080 | 2,000 | 1,130 | 0.1 |
| LSQPA322525T3R3MR | CB C3225T3R3MR | RoHS | 3.3 | $\pm 20\%$ | 160 | 0.095 | 2,000 | 1,040 | 0.1 |
| LSQPA322525T4R7MR | CB C3225T4R7MR | RoHS | 4.7 | $\pm 20\%$ | 70 | 0.100 | 1,250 | 1,010 | 0.1 |
| LSQPA322525T6R8MR | CB C3225T6R8MR | RoHS | 6.8 | $\pm 20\%$ | 50 | 0.120 | 950 | 940 | 0.1 |
| LSQPA322525T100KR | CB C3225T100KR | RoHS | 10 | $\pm 10\%$ | 23 | 0.133 | 900 | 900 | 0.1 |
| LSQPA322525T100MR | CB C3225T100MR | RoHS | 10 | $\pm 20\%$ | 23 | 0.133 | 900 | 900 | 0.1 |
| LSQPA322525T150KR | CB C3225T150KR | RoHS | 15 | $\pm 10\%$ | 20 | 0.195 | 730 | 850 | 0.1 |
| LSQPA322525T150MR | CB C3225T150MR | RoHS | 15 | $\pm 20\%$ | 20 | 0.195 | 730 | 850 | 0.1 |
| LSQPA322525T220KR | CB C3225T220KR | RoHS | 22 | $\pm 10\%$ | 17 | 0.27 | 620 | 780 | 0.1 |
| LSQPA322525T220MR | CB C3225T220MR | RoHS | 22 | $\pm 20\%$ | 17 | 0.27 | 620 | 780 | 0.1 |
| LSQPA322525T330KR | CB C3225T330KR | RoHS | 33 | $\pm 10\%$ | 13 | 0.41 | 500 | 570 | 0.1 |
| LSQPA322525T330MR | CB C3225T330MR | RoHS | 33 | $\pm 20\%$ | 13 | 0.41 | 500 | 570 | 0.1 |
| LSQPA322525T470KR | CB C3225T470KR | RoHS | 47 | $\pm 10\%$ | 10 | 0.67 | 390 | 480 | 0.1 |
| LSQPA322525T470MR | CB C3225T470MR | RoHS | 47 | $\pm 20\%$ | 10 | 0.67 | 390 | 480 | 0.1 |
| LSQPA322525T680KR | CB C3225T680KR | RoHS | 68 | $\pm 10\%$ | 8.0 | 1.0 | 320 | 410 | 0.1 |
| LSQPA322525T680MR | CB C3225T680MR | RoHS | 68 | $\pm 20\%$ | 8.0 | 1.0 | 320 | 410 | 0.1 |
| LSQPA322525T101KR | CB C3225T101KR | RoHS | 100 | $\pm 10\%$ | 6.0 | 1.4 | 270 | 340 | 0.1 |
| LSQPA322525T101MR | CB C3225T101MR | RoHS | 100 | $\pm 20\%$ | 6.0 | 1.4 | 270 | 340 | 0.1 |
| LSQPA322525T221KR | CB C3225T221KR | RoHS | 220 | $\pm 10\%$ | 3.0 | 2.5 | 190 | 190 | 0.1 |
| LSQPA322525T221MR | CB C3225T221MR | RoHS | 220 | $\pm 20\%$ | 3.0 | 2.5 | 190 | 190 | 0.1 |
| LSQPA322525T821KR | CB C3225T821KR | RoHS | 820 | $\pm 10\%$ | 1.8 | 12 | 110 | 110 | 0.1 |
| LSQPA322525T821MR | CB C3225T821MR | RoHS | 820 | $\pm 20\%$ | 1.8 | 12 | 110 | 110 | 0.1 |
| LSQPA322525T102KR | CB C3225T102KR | RoHS | 1000 | $\pm 10\%$ | 1.6 | 13 | 100 | 100 | 0.1 |
| LSQPA322525T102MR | CB C3225T102MR | RoHS | 1000 | $\pm 20\%$ | 1.6 | 13 | 100 | 100 | 0.1 |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C. (at 20°C)

※) The rated current value is following either Idc1 or Idc2, which is the lower one.

Wire-wound Ferrite Inductors LSQB/LSQC/LSQE/LLQB/LLQC/LLQE/LMQB/LMQC/LMQE/
LBQB/LBQC/LBQE series

Wire-wound Ferrite Power Inductors LSQN/LSQPA/LLQN/LLQPA/LMQN/LMQPA/
LBQN/LBQPA series

Wire-wound Ferrite Inductors for Signal Lines LSQM/LLQM/LMQM/LBQM series


■ PACKAGING

① Minimum Quantity


| Type | Standard Quantity [pcs] | |
|---------|-------------------------|---------------|
| | Paper Tape | Embossed Tape |
| A322525 | — | 1000 |
| A321818 | — | 2000 |
| A251818 | — | 2000 |
| B201616 | — | 2000 |
| A201616 | — | 2000 |
| A201212 | — | 3000 |
| A201209 | 4000 | — |
| A160808 | 4000 | — |
| B160808 | — | 3000 |

② Tape material

● Embossed tape

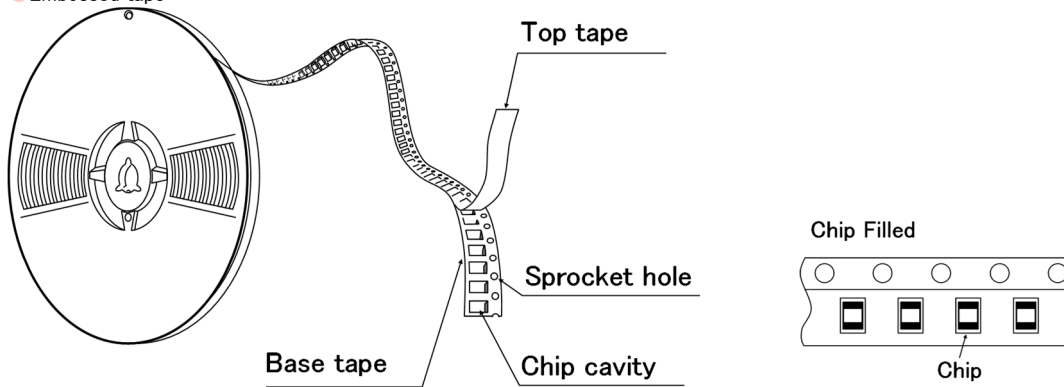


● Card board carrier tape

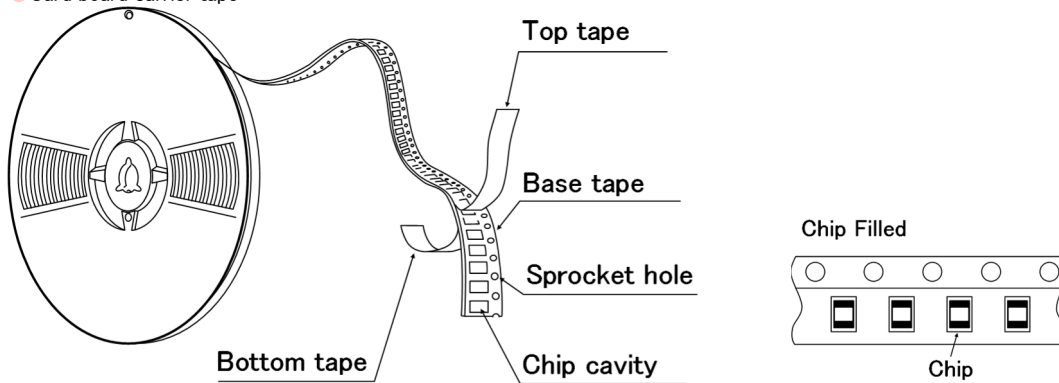

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

③ Taping Dimensions


● Embossed Tape (0.315 inches wide)

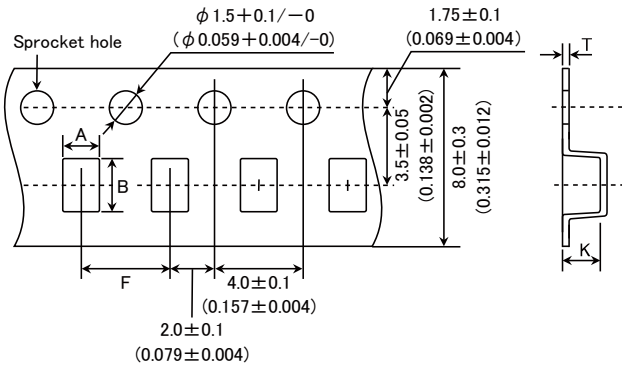

| Type | Chip cavity | | Insertion pitch F | Tape thickness | |
|---------|---------------------------------------|---------------------------------------|--------------------------------------|--|------------------------------------|
| | A | B | | T | K |
| B201616 | 1.75 ± 0.1 (0.069 ± 0.004) | 2.1 ± 0.1 (0.083 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.3 ± 0.05 (0.012 ± 0.002) | 1.9max. (0.075max.) |
| A322525 | 2.8 ± 0.1 (0.110 ± 0.004) | 3.5 ± 0.1 (0.138 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.3 ± 0.05 (0.012 ± 0.002) | 4.0max. (0.157max.) |
| A321818 | 2.1 ± 0.1 (0.083 ± 0.004) | 3.5 ± 0.1 (0.138 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.3 ± 0.05 (0.012 ± 0.002) | 2.2max. (0.087max.) |
| A251818 | 2.15 ± 0.1 (0.085 ± 0.004) | 2.7 ± 0.1 (0.106 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.3 ± 0.05 (0.012 ± 0.002) | 2.2max. (0.087max.) |
| A201616 | 1.75 ± 0.1 (0.069 ± 0.004) | 2.1 ± 0.1 (0.083 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.3 ± 0.05 (0.012 ± 0.002) | 1.9max. (0.075max.) |
| A201212 | 1.45 ± 0.1 (0.057 ± 0.004) | 2.25 ± 0.1 (0.089 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.25 ± 0.05 (0.010 ± 0.002) | 1.45max. (0.057max.) |
| B160808 | 1.1 ± 0.1 (0.043 ± 0.004) | 1.9 ± 0.1 (0.075 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 0.25 ± 0.05 (0.010 ± 0.002) | 1.2max. (0.047max.) |

Unit : mm (inch)


● Card board carrier tape (0.315 inches wide)

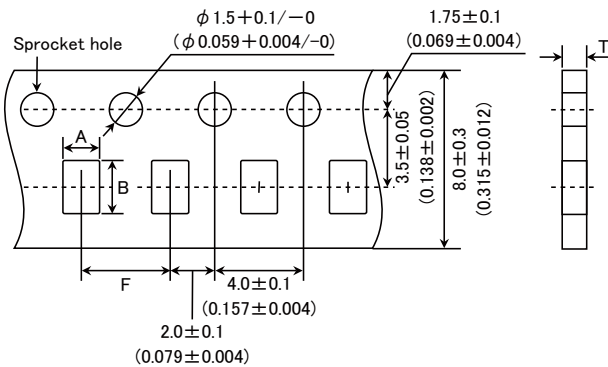


| Type | Chip cavity | | Insertion pitch F | Tape thickness |
|---------|---------------------------------------|--------------------------------------|--------------------------------------|-----------------------------------|
| | A | B | | T |
| A201209 | 1.55 ± 0.1 (0.061 ± 0.004) | 2.3 ± 0.1 (0.091 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 1.1max. (0.043max.) |
| A160808 | 1.0 ± 0.1 (0.039 ± 0.004) | 1.8 ± 0.1 (0.071 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) | 1.1max. (0.043max.) |

Unit : mm (inch)

④ Leader and Blank Portion

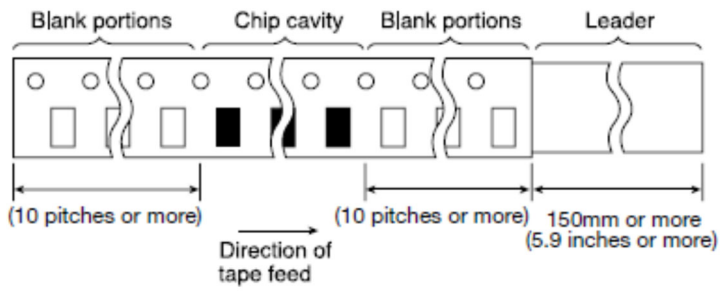


⑤ Reel Size

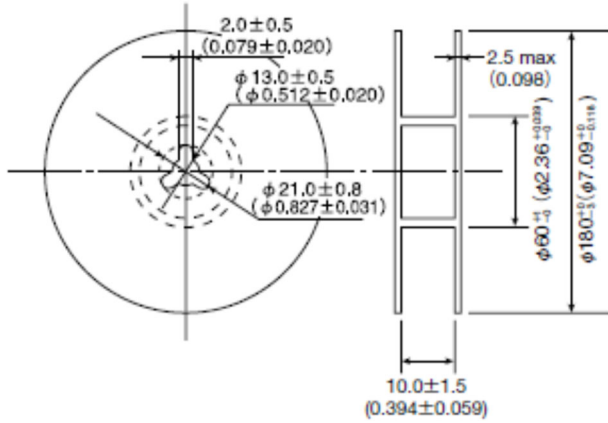

⑥ Top Tape Strength

The top tape requires a peel-off force 0.1 to 1.0N in the direction of the arrow as illustrated below.

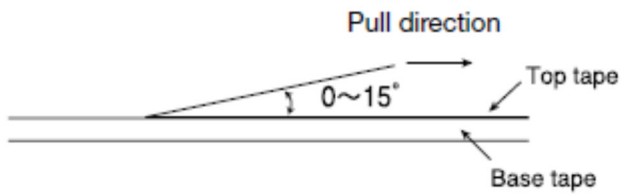

Wire-wound Ferrite Inductors LSQB/LSQC/LSQE series

for General Electronic Equipment for Consumer

Wire-wound Ferrite Power Inductors LSQN/LSQPA series

for General Electronic Equipment for Consumer

Wire-wound Ferrite Inductors for Signal Lines LSQM series

for General Electronic Equipment for Consumer

Wire-wound Ferrite Inductors LLQB/LLQC/LLQE series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Power Inductors LLQN/LLQPA series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

Wire-wound Ferrite Inductors for Signal Lines LLQM series

for Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)

■ RELIABILITY DATA

1. Operating temperature Range

Specified Value -40~+105°C (Including self-generated heat)

2. Storage Temperature Range (after soldering)

Specified Value -40~+85°C

Test Methods and Remarks Wire-wound Ferrite Inductors, Wire-wound Ferrite Power Inductors
Please refer the term of "7. storage conditions" in precautions.

3. Rated Current

Specified Value Within the specified tolerance

4. Inductance

Specified Value Within the specified tolerance

Test Methods and Remarks Measuring equipment : LCR Meter (HP4285A or its equivalent)
Measuring frequency : Specified frequency

5. Q

Specified Value Wire-wound Ferrite Inductors for Signal Lines:
Within the specified tolerance

Test Methods and Remarks Wire-wound Ferrite Inductors for Signal Lines:
Measuring equipment : LCR Meter (HP4285A or its equivalent)
Measuring frequency : Specified frequency

6. DC Resisittance

Specified Value Within the specified tolerance

Test Methods and Remarks Measuring equipment : DC Ohmmeter (HIOKI 3227 or its equivalent)


7. Self-Resonant Frequency

Specified Value Within the specified tolerance

Test Methods and Remarks Measuring equipment : Impedance analyzer (HP4291A or its equivalent)

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 8. Temperature Characteristic | | | | | |
|-------------------------------|---|-----------|--------------------------------------|---------------------------------------|---------------------------------------|
| Specified Value | LSQMB2016 | | Inductance change : Within $\pm 5\%$ | | |
| | LLQMB2016 | | | | |
| | LSQBA1608 | LSQBA2012 | LSQEA2012 | LSQNA2012 | Inductance change : Within $\pm 20\%$ |
| | LSQNA2012 | LSQBA2016 | LSQNA2016 | LSQBA2518 | |
| | LSQEA2518 | LSQNA2518 | LSQCA3225 | LSQPA3225 | |
| | LLQBA2016 | LLQBA2012 | LLQEA2012 | LLQNA2012 | |
| | LLQNA2012 | LLQBA2016 | LLQNA2016 | LLQBA2518 | Inductance change : Within $\pm 25\%$ |
| | LLQEA2518 | LLQNA2518 | LLQCA3225 | LLQPA3225 | |
| | LSQBB1608 | LSQNB1608 | LSQCA2016 | LSQPA2016 | |
| | LSQCA2518 | LSQPA2518 | LSQBA3218 | | |
| LLQBB1608 | LLQNB1608 | LLQCA2016 | LLQPA2016 | Inductance change : Within $\pm 35\%$ | |
| LLQCA2518 | LLQPA2518 | LLQBA3218 | | | |
| LSQCA2012 | LSQPA2012 | | | | |
| | LLQCA2012 | LLQPA2012 | | | |
| Test Methods and Remarks | Based on the inductance at 20°C and Measured at the ambient of $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$. | | | | |
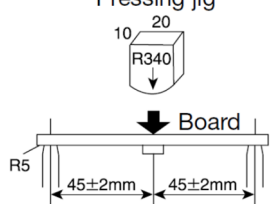
| 9. Resistance to Flexure of Substrate | |
|---------------------------------------|---|
| Specified Value | No damage. |
| Test Methods and Remarks | <p>Warp : 2mm Test substrate : Glass epoxy-resin substrate Thickness : 1.0mm (1608 type:0.8mm)</p> <p>Pressing jig</p>  <p>Board</p> <p>45±2mm 45±2mm</p> |

| 10. Body Strength | |
|--------------------------|--|
| Specified Value | No damage. |
| Test Methods and Remarks | <p>Applied force : 10N (1608 type:5N) Duration : 10sec.</p> |

| 11. Adhesion of terminal electrode | | |
|------------------------------------|--|-----------------|
| Specified Value | LB, LBC, LBR, LBMF Series | No abnormality. |
| | CB, CBC, CBL, CBMF Series | |
| | LBM Series | |
| Test Methods and Remarks | <p>Applied force : 10N to X and Y directions (1608 type:5N to X and Y directions) Duration : 5 sec. Test substrate : Printed board</p> | |

12. Resistance to vibration

| | | | | | | | | | | | | | | | |
|--------------------------|---|---------------------------------------|---------|--|-----------------|--|--|-----------------|--------------------------------|--|------|---|---------------------------------------|---|---|
| Specified Value | Wire-wound Ferrite Inductors, Wire-wound Ferrite Power Inductors Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. Wire-wound Ferrite Inductors for Signal Lines Inductance change : Within $\pm 5\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | |
| Test Methods and Remarks | The given sample is soldered to the board and then it is tested depending on the conditions of the following table. <table border="1"> <tr> <td>Vibration Frequency</td> <td colspan="2">10~55Hz</td> </tr> <tr> <td>Total Amplitude</td> <td colspan="2">1.5mm (May not exceed acceleration 196m/s²)</td> </tr> <tr> <td>Sweeping Method</td> <td colspan="2">10Hz to 55Hz to 10Hz for 1min.</td> </tr> <tr> <td rowspan="3">Time</td> <td>X</td> <td rowspan="3">For 2 hours on each X, Y, and Z axis.</td> </tr> <tr> <td>Y</td> </tr> <tr> <td>Z</td> </tr> </table> Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. | Vibration Frequency | 10~55Hz | | Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | Time | X | For 2 hours on each X, Y, and Z axis. | Y | Z |
| Vibration Frequency | 10~55Hz | | | | | | | | | | | | | | |
| Total Amplitude | 1.5mm (May not exceed acceleration 196m/s ²) | | | | | | | | | | | | | | |
| Sweeping Method | 10Hz to 55Hz to 10Hz for 1min. | | | | | | | | | | | | | | |
| Time | X | For 2 hours on each X, Y, and Z axis. | | | | | | | | | | | | | |
| | Y | | | | | | | | | | | | | | |
| | Z | | | | | | | | | | | | | | |

13. Drop test

| | |
|-----------------|---|
| Specified Value | — |
|-----------------|---|

14. Solderability

| | |
|--------------------------|---|
| Specified Value | At least 90% of surface of terminal electrode is covered by new |
| Test Methods and Remarks | Solder temperature : $245 \pm 5^\circ\text{C}$ Duration : $5 \pm 0.5\text{sec}$ Flux : Ethanol solution with 25% of colophony |

15. Resistance to soldering

| | |
|--------------------------|--|
| Specified Value | Wire-wound Ferrite Inductors, Wire-wound Ferrite Power Inductors Inductance change : Within $\pm 10\%$ Wire-wound Ferrite Inductors for Signal Lines Inductance change : Within $\pm 5\%$ |
| Test Methods and Remarks | 3 times of reflow oven at 230°C MIN for 40sec. with peak temperature at 260°C for 5sec. Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |

16. Resistance to solvent

| | |
|--------------------------|---|
| Specified Value | — |
| Test Methods and Remarks | Solvent temperature : Room temperature Type of solvent : Isopropyl alcohol Cleaning conditions : 90s. Immersion and cleaning. |

17. Thermal shock

| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. | | | | | | | | | | | | | | | | | | |
|--------------------------|--|-----------------------|--|--|------|----------------------------------|----------------|---|-------------|------------|---|------------------|----------|---|-------------|------------|---|------------------|----------|
| Test Methods and Remarks | The given sample is soldered to the board and then its Inductance is measured after 100cycles of the following conditions. <table border="1"> <thead> <tr> <th colspan="3">Conditions of 1 cycle</th> </tr> <tr> <th>Step</th> <th>Temperature ($^\circ\text{C}$)</th> <th>Duration (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40 ± 3</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>$+85 \pm 2$</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>Within 3</td> </tr> </tbody> </table> Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. | Conditions of 1 cycle | | | Step | Temperature ($^\circ\text{C}$) | Duration (min) | 1 | -40 ± 3 | 30 ± 3 | 2 | Room temperature | Within 3 | 3 | $+85 \pm 2$ | 30 ± 3 | 4 | Room temperature | Within 3 |
| Conditions of 1 cycle | | | | | | | | | | | | | | | | | | | |
| Step | Temperature ($^\circ\text{C}$) | Duration (min) | | | | | | | | | | | | | | | | | |
| 1 | -40 ± 3 | 30 ± 3 | | | | | | | | | | | | | | | | | |
| 2 | Room temperature | Within 3 | | | | | | | | | | | | | | | | | |
| 3 | $+85 \pm 2$ | 30 ± 3 | | | | | | | | | | | | | | | | | |
| 4 | Room temperature | Within 3 | | | | | | | | | | | | | | | | | |

18. Damp heat life test

| | |
|--------------------------|---|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | Temperature : $60 \pm 2^\circ\text{C}$ Humidity : 90~95%RH Duration : 1000 hrs Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 19.Loading under damp heat life test | |
|--|---|
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | Temperature : $60 \pm 2^\circ\text{C}$ Humidity : $90 \sim 95\% \text{RH}$ Duration : 1000 hrs Applied current : Rated current Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |
| 20.High temperature life test | |
| Specified Value | Wire-wound Ferrite Power Inductors, Wire-wound Ferrite Inductors for Signal Lines : Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | Temperature : $85 \pm 2^\circ\text{C}$ Duration : 1000 hrs Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |
| 21.Loading at high temperature life test | |
| Specified Value | Wire-wound Ferrite Inductors : Inductance change : Within $\pm 10\%$ (3225 type : Within $\pm 20\%$) No significant abnormality in appearance. |
| Test Methods and Remarks | Temperature : $85 \pm 2^\circ\text{C}$ Duration : 1000 hrs Applied current : Rated current Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |
| 22.Low temperature life test | |
| Specified Value | Inductance change : Within $\pm 10\%$ No significant abnormality in appearance. |
| Test Methods and Remarks | Temperature : $-40 \pm 2^\circ\text{C}$ Duration : 1000 hrs Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs. |
| 23.Standard condition | |
| Specified Value | Standard test conditions Unless specified, Ambient temperature is $20 \pm 15^\circ\text{C}$ and the Relative humidity is $65 \pm 20\%$. If there is any doubt about the test results, further measurement shall be had within the following limits: Ambient Temperature: $20 \pm 2^\circ\text{C}$ Relative humidity: $65 \pm 5\%$ Inductance value is based on our standard measurement systems. |

**Wire-wound Ferrite Inductors LSQB/LSQC/LSQE/LLQB/LLQC/LLQE/LMQB/LMQC/LMQE/
LBQB/LBQC/LBQE series**

**Wire-wound Ferrite Power Inductors LSQN/LSQPA/LLQN/LLQPA/LMQN/LMQPA/
LBQN/LBQPA series**

Wire-wound Ferrite Inductors for Signal Lines LSQM/LLQM/LMQM/LBQM series

■ PRECAUTIONS

| 1. Circuit Design | |
|---|--|
| Precautions | <ul style="list-style-type: none"> ◆ Verification of operating environment, electrical rating and performance <ol style="list-style-type: none"> 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications. 2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions. ◆ Operating Current (Verification of Rated current) <ol style="list-style-type: none"> 1. The operating current including inrush current for inductors must always be lower than their rated values. 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect. ◆ Temperature rise <p>Temperature rise of power choke coil depends on the installation condition in end products.</p> <p>Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p> |
| 2. PCB Design | |
| Precautions | <ul style="list-style-type: none"> ◆ Land pattern design <ol style="list-style-type: none"> 1. Please contact any of our offices for a land pattern, and refer to a recommended land pattern of a right figure or specifications. |
| Technical considerations | <p>PRECAUTIONS 【Recommended Land Patterns】</p> <p>Surface Mounting</p> <ul style="list-style-type: none"> • Mounting and soldering conditions should be checked beforehand. • Applicable soldering process to those products is reflow soldering only. |
| 3. Considerations for automatic placement | |
| Precautions | <ul style="list-style-type: none"> ◆ Adjustment of mounting machine <ol style="list-style-type: none"> 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand. |
| Technical considerations | <ol style="list-style-type: none"> 1. When installing products, care should be taken not to apply distortion stress as it may deform the products. |
| 4. Soldering | |
| Precautions | <ul style="list-style-type: none"> ◆ Reflow soldering (Wire-wound Ferrite Inductors, Wire-wound Ferrite Power Inductors) <ol style="list-style-type: none"> 1. For reflow soldering with either leaded or lead-free solder, the profile specified in "point for controlling" is recommended. ◆ Recommended conditions for using a soldering iron <ol style="list-style-type: none"> 1. Put the soldering iron on the land-pattern. Soldering iron's temperature - Below 350°C Duration-3 seconds or less. The soldering iron should not come in contact with inductor directly. |
| Technical considerations | <ul style="list-style-type: none"> ◆ Reflow soldering (Wire-wound Ferrite Inductors, Wire-wound Ferrite Power Inductors) <ol style="list-style-type: none"> 1. Reflow profile <div style="text-align: center;"> <p>The graph shows a reflow profile with the following parameters: - Heating to 150~180°C: 90±30sec - Heating to peak: 30±10sec (230°C min) - Peak temperature: 260+0/-5°C - Cooling time: 5sec max</p> </div> ◆ Recommended conditions for using a soldering iron <ol style="list-style-type: none"> 1. Components can be damaged by excessive heat where soldering conditions exceed the specified range. |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 5. Cleaning | |
|--------------------------|---|
| Precautions | <ul style="list-style-type: none"> ◆Cleaning conditions Washing by supersonic waves shall be avoided. |
| Technical considerations | <ul style="list-style-type: none"> ◆Cleaning conditions If washed by supersonic waves, the products might be broken. |
| 6. Handling | |
| Precautions | <ul style="list-style-type: none"> ◆Handling 1. Keep the inductors away from all magnets and magnetic objects. ◆Breakaway PC boards (splitting along perforations) 1. When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆Mechanical considerations 1. Please do not give the inductors any excessive mechanical shocks. |
| Technical considerations | <ul style="list-style-type: none"> ◆Handling 1. There is a case that a characteristic varies with magnetic influence. ◆Breakaway PC boards (splitting along perforations) 1. Planning pattern configurations and the position of products should be carefully performed to minimize stress. ◆Mechanical considerations 1. There is a case to be damaged by a mechanical shock. |
| 7. Storage conditions | |
| Precautions | <ul style="list-style-type: none"> ◆Storage 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. <ul style="list-style-type: none"> • Recommended conditions Ambient temperature : 0~40°C Humidity : Below 70% RH • The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, product should be used within 6 months from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage. |
| Technical considerations | <ul style="list-style-type: none"> ◆Storage 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place. |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Taiyo Yuden\(太阳诱电\)](#)