

## GV

## General purpose Series

■ Endurance:85°C, 2000 hours

■ Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Communication


■ Corresponding product to RoHS




## ■ Specifications

Item	Characteristics															
Category Temperature Range	-55 ~ +85°C															
Rated Voltage Range	4 ~ 100VDC															
Rated Capacitance Range	1 ~ 1500 μF															
Capacitance Tolerance	± 20 % at 120Hz , 20°C															
Leakage Current (20°C)	I≤0.01CV or 3 μ A ,whichever is greater. (After rated voltage applied for 2 minutes) I : Max. leakage current (μ A), C : Nominal capacitance (μ F), V : Rated voltage (V)															
Dissipation Factor(MAX) (tan δ ) (120Hz ,20°C)	Shown in the table of standard rating															
Low Temperature Stability Impedance Ratio (MAX)	WV Z(120HZ)	4	6.3	10	16	25	35	50	63	100						
	Z(-25°C) / Z(20°C)	7	4	3	2	2	2	2	2	2						
	Z(-40°C) / Z(20°C)	15	8	6	4	4	3	3	3	3						
Endurance	After applying rated voltage for 2000hrs at 85°C, Stay back to 20 °C temperature measurement, the capacitors shall meet the following requirements. <table border="1"><tr><td>Capacitance Change</td><td>Within ±20% of the initial value</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200% of the specified value</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value</td></tr></table>										Capacitance Change	Within ±20% of the initial value	Dissipation Factor	Not more than 200% of the specified value	Leakage Current	Not more than the specified value
Capacitance Change	Within ±20% of the initial value															
Dissipation Factor	Not more than 200% of the specified value															
Leakage Current	Not more than the specified value															
Shelf Life	After placed at 85°C without voltage applied for 1000 hours, Stay back to 20 °C temperature measurement, the capacitor shall meet the same requirement as Endurance.															

## ■ MARKING

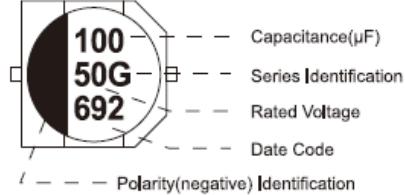

## ■ Dimensions [mm]

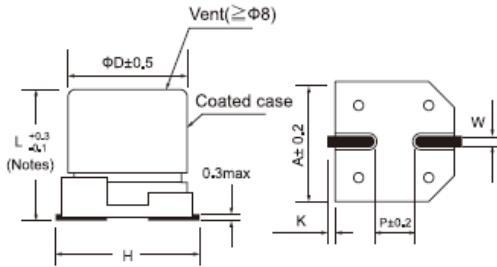

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	1.8	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	1.8	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

## ■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.80	1.00	1.15	1.25

GV

General purpose Series

## STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ DxL(mm)	$\tan \delta$	Ripple current (mA/rms 85°C) (120Hz)	Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ DxL(mm)	$\tan \delta$	Ripple current (mA/rms 85°C) (120Hz)
4(5)	33	4x5.4	0.35	26	25(32)	10	4x5.4	0.20	24
	47	4x5.4	0.35	34		10	5x5.4	0.14	28
	100	5x5.4	0.35	61		10	6.3x5.4	0.14	28
	220	6.3x5.4	0.35	82		22	5x5.4	0.20	35
	330	6.3x5.4	0.35	80		22	6.3x5.4	0.14	55
	470	6.3x7.7	0.35	200		33	5x5.4	0.20	42
6.3(8)	22	4x5.4	0.26	20		33	6.3x5.4	0.14	65
	33	4x5.4	0.26	22		33	6.3x5.4	0.20	70
	47	4x5.4	0.26	36		47	6.3x5.4	0.16	96
		5x5.4	0.26	46		47	6.3x7.7	0.16	63
		5x5.4	0.26	47		100	6.3x5.4	0.20	80
	100	6.3x5.4	0.26	71		100	6.3x7.7	0.16	143
		6.3X7.7	0.26	143		100	8x6.2	0.16	143
	220	6.3x5.4	0.35	74		180	8x10.2	0.16	180
		6.3x7.7	0.35	235		220	8x10.2	0.16	230
	330	6.3x7.7	0.35	280		220	10x10.2	0.16	310
		8x6.2	0.35	280		330	8x10.2	0.16	270
	470	8x6.2	0.35	312		330	10x10.2	0.16	340
		8x10.2	0.35	380		470	10x10.2	0.16	380
	1000	8x10.2	0.35	500		2.2	4x5.4	0.12	8
	1500	10x10.2	0.35	750		3.3	4x5.4	0.12	10
10(13)	10	4x5.4	0.30	20		4.7	5x5.4	0.12	11
	22	4x5.4	0.30	28		10	4x5.4	0.12	22
		5x5.4	0.30	40		22	5x5.4	0.16	36
	33	4x5.4	0.30	29		33	6.3x5.4	0.12	60
		5x5.4	0.20	43		33	6.3x5.4	0.16	60
	47	5x5.4	0.30	43		33	6.3x7.7	0.14	130
		6.3X5.4	0.30	66		47	6.3x5.4	0.16	70
	100	5X5.4	0.30	43		47	6.3x7.7	0.14	165
		6.3x5.4	0.26	70		8x6.2	0.14	165	
	150	6.3x5.4	0.26	86		100	6.3x7.7	0.14	140
		6.3x5.4	0.26	110		100	8x10.2	0.14	180
	220	6.3x7.7	0.26	250		220	10x10.2	0.14	210
		8x6.2	0.26	250		220	10x10.2	0.14	310
	330	8x10.2	0.26	330		150	8x10.2	0.14	180
		8x10.2	0.26	390		330	8x10.2	0.14	350
	470	10x10.2	0.26	400		10x10.2	0.14	350	
	680	8x10.2	0.26	420		10x10.2	0.14	350	
	1000	10x10.2	0.26	580		10x10.2	0.14	350	
16(20)	1	4x5.4	0.16	10	50(63)	1	4x5.4	0.12	10
	4.7	4x5.4	0.16	20		2.2	4x5.4	0.12	16
		4x5.4	0.16	28		3.3	4x5.4	0.12	16
	10	5x5.4	0.16	28		4.7	4x5.4	0.14	18
		4x5.4	0.26	28		5x5.4	0.12	23	
	22	5x5.4	0.16	39		10	5x5.4	0.14	27
		4x5.4	0.26	30		10	6.3x5.4	0.12	35
	33	5x5.4	0.26	45		22	6.3x5.4	0.14	40
		6.3x5.4	0.16	66		22	6.3x7.7	0.12	90
		5x5.4	0.16	45		33	6.3x7.7	0.12	90
	47	6.3x5.4	0.16	70		33	8x6.2	0.12	95
		8x6.2	0.16	85		33	8x10.2	0.12	120
		6.3x5.4	0.20	70		47	6.3x7.7	0.12	90
	100	6.3x7.7	0.20	85		47	8x6.2	0.12	100
		8x6.2	0.2	85		47	8x10.2	0.12	120
	220	6.3x7.7	0.20	162		56	8x10.2	0.12	130
		8x10.2	0.20	280		100	8x10.2	0.12	200
	330	8x10.2	0.20	320		100	10x10.2	0.12	250
		10x10.2	0.20	380		220	10x10.2	0.12	300
	470	8x10.2	0.20	350		4.7	5x5.4	0.18	20
		10x10.2	0.20	420		4.7	6.3x5.4	0.18	20
	680	10x10.2	0.20	500		10	6.3x5.4	0.18	20
25(32)	4.7	4x5.4	0.14	22		22	6.3x7.7	0.18	40

GV

General purpose Series

## ■ STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ DxL(mm)	$\tan \delta$ (%)	Ripple current (mA/rms 85°C) (120Hz)	Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ DxL(mm)	$\tan \delta$ (%)	Ripple current (mA/rms 85°C) (120Hz)
63(79)	22	8x6.2	0.18	40	100(125)	4.7	6.3x7.7	0.18	50
		8x10.2	0.18	40		8x10.2	0.18	50	
	33	8x10.2	0.18	45		10	6.3x7.7	0.18	50
		8x10.2	0.18	45		8X10.2	0.18	55	
	47	10x10.2	0.18	55		22	8X10.2	0.18	55
		10x10.2	0.18	60		33	10X10.2	0.18	85
	100	10x10.2	0.18	60		47	10X10.2	0.18	90
		6.3X7.7	0.18	50					95
	3.3	6.3x5.4	0.18	40					
	4.7								



电子元器件线上授权代理开拓者  
原厂授权 · 正品现货 · 一件即发

单击下面可查看定价，库存，交付和生命周期等信息

[>>Teapo \(智宝\)](#)