



5

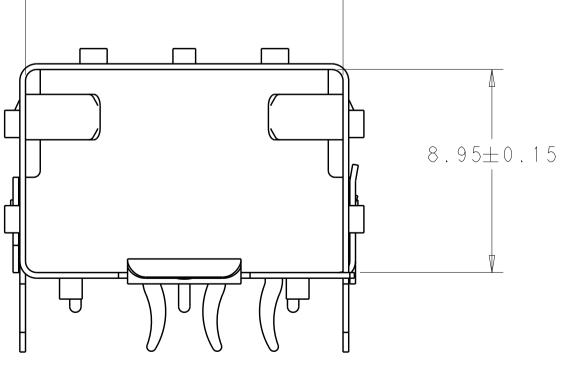

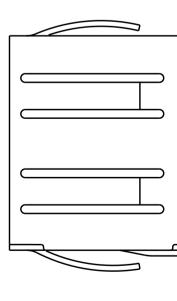

Downloaded From Oneyac.com

4805 (3/11)


MATERIAL: 0.25mm THICK STAINLESS STEEL.

4

- 🛆 FINISH: NICKEL, NON PLATED EDGES PERMISSIBLE.
- 3. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- A PADS AND VIAS CHASSIS GROUND.
- ⚠ → DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 6. MINIMUM PC BOARD THICKNESS: SINGLE SIDED = 1.50 mm DOUBLE SIDED = 3.00 mm
- A REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS(EXCEPT IMMERSION SILVER PLATING).


3


- REFERENCE APPLICATION SPEC. 114-13120, HOLE C, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS(EXCEPT IMMERSION SILVER PLATING).
- 9. THE RECOMMENDED DIMENSIONS FOR HOLES ON PAGE 2/2 ARE NOT COMPATIBLE WITH IMMERSION SILVER PLATING HOLES BECAUSE OF OVERLARGE INSERTION FORCE.
- TE ALWAYS SUGGEST CUSTOMER TO CHECK THE RISK OF INTERFERENCE BETWEEN CAGE LATCH AND BEZEL IN APPLICATION. WHEN DIM 'M' LESS THAN I.7mm IN APPLICATION, WE RECOMMEND OPTIONAL BEZEL DESIGN PROPOSAL WITH GROOVE TO MAKE SURE CAGE LATCH MOVE FREELY DURING INSERT AND EXTRACT MODULE PROCESS.

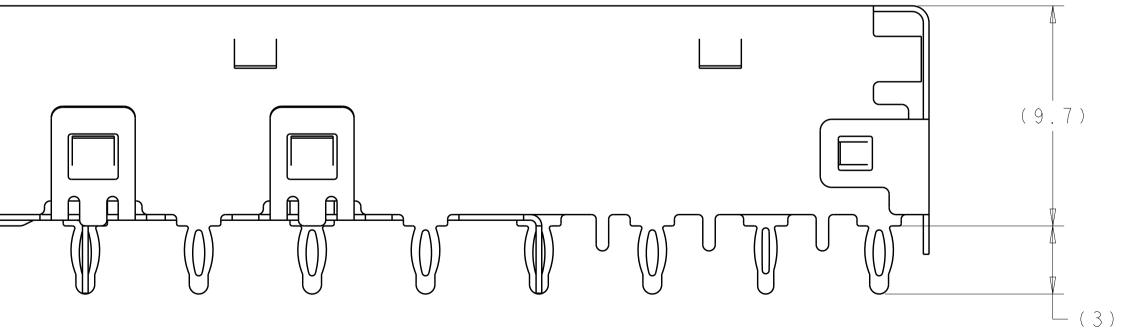


| | | | | 2227316-1 PART NUMBER |
|--------------------|--|---|---|--|
| DIMENSIONING A | Y14.5M-2009 TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.2 2 PLC ±0.1 | C. VALENTINE CHK 06NOV2012 | NAME SFP, 1X1 SINGLE 11 press fit, he - | |
| MATERIAL - - | 3 PLC ±0.1 4 PLC ±- ANGLES ±- FINISH - - - | APPLICATION SPEC 114-13120 WEIGHT – Customer Drawing | size cage code drawing no A 1 0 0 7 7 9 C - 2 2 2 7 3 1 6 scale 6 : | RESTRICTED TO - 1 SHEET 1 OF 2 REV B |

| | | 2 | | | 1 | | | |
|----|-----|------|-----------|-----|---------------------------|-----------|-----|------|
| Τ | LOC | DIST | REVISIONS | | | | | |
| GΡ | | 00 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| • | | | Τ | А | INITIAL RELEASE | 21MAY2014 | CW | SH |
| | | | | В | REVISED PER ECO-19-009018 | 12JUN2019 | ΙT | SH |
| | | | | | | | | |
| | | | | | | | | |

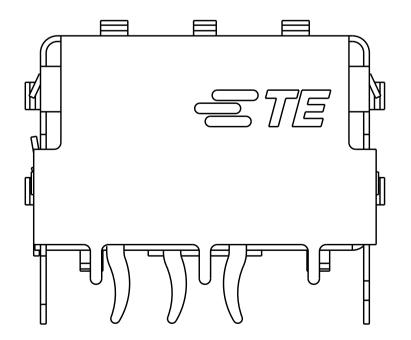

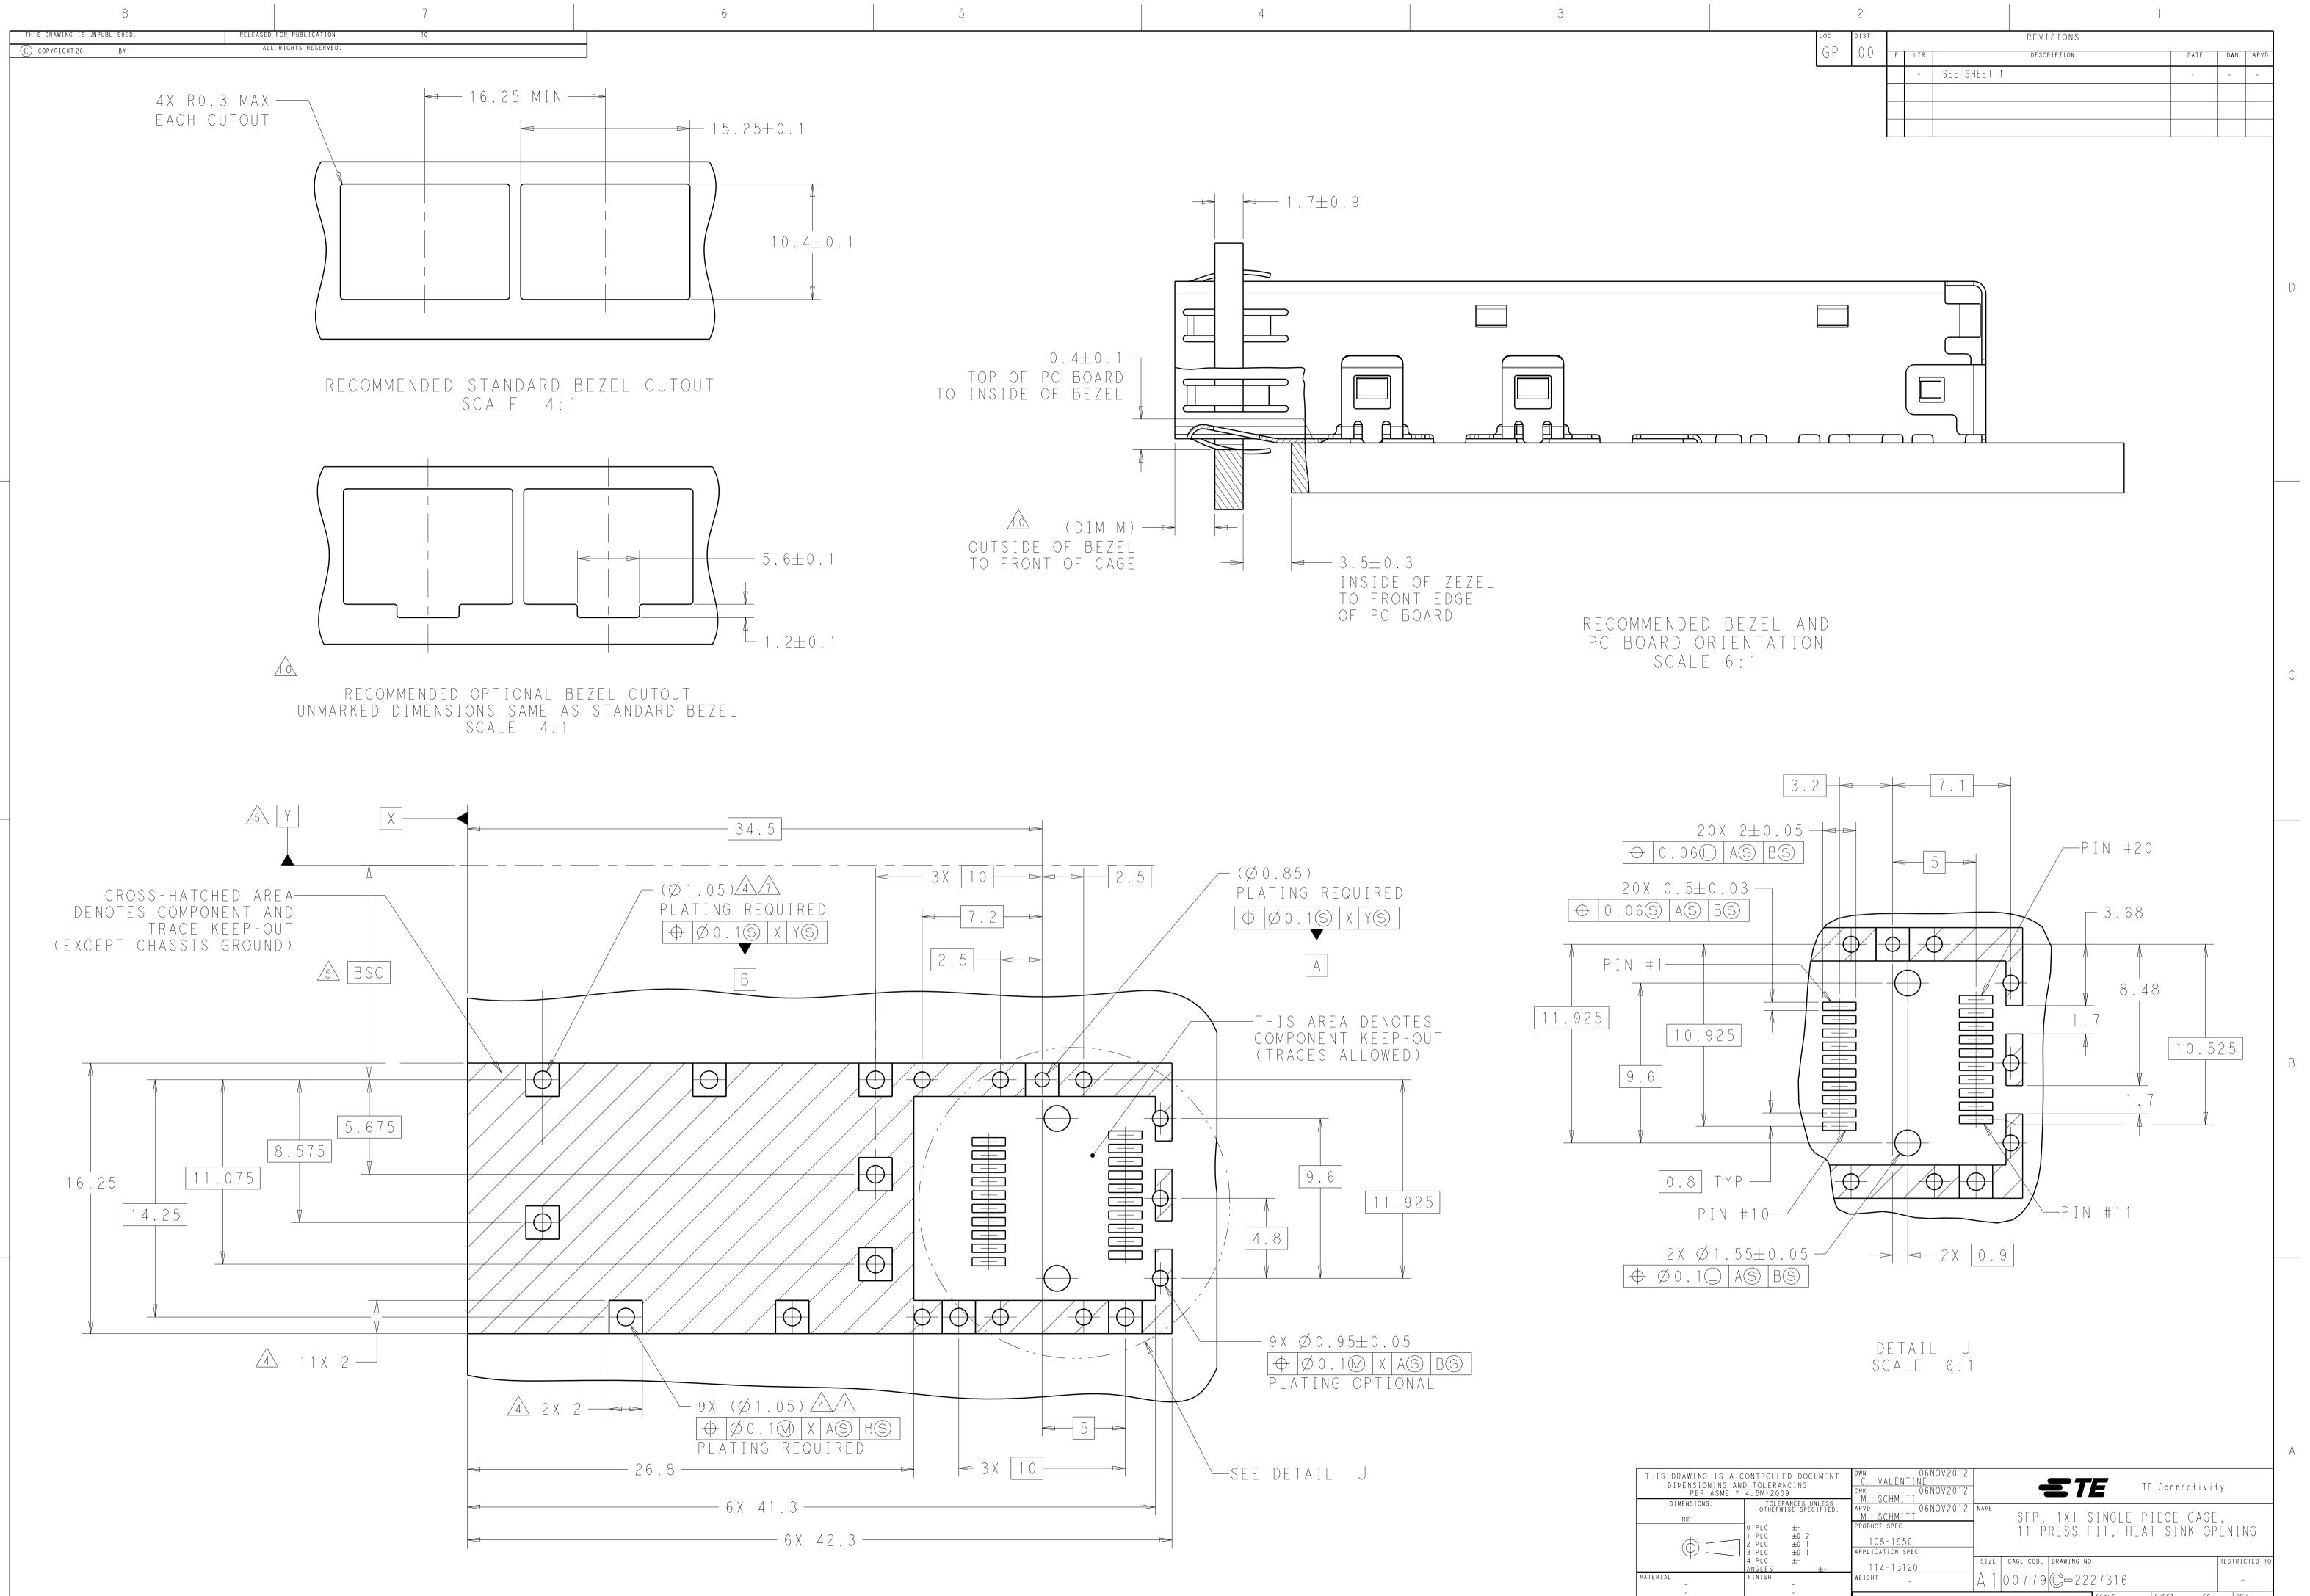

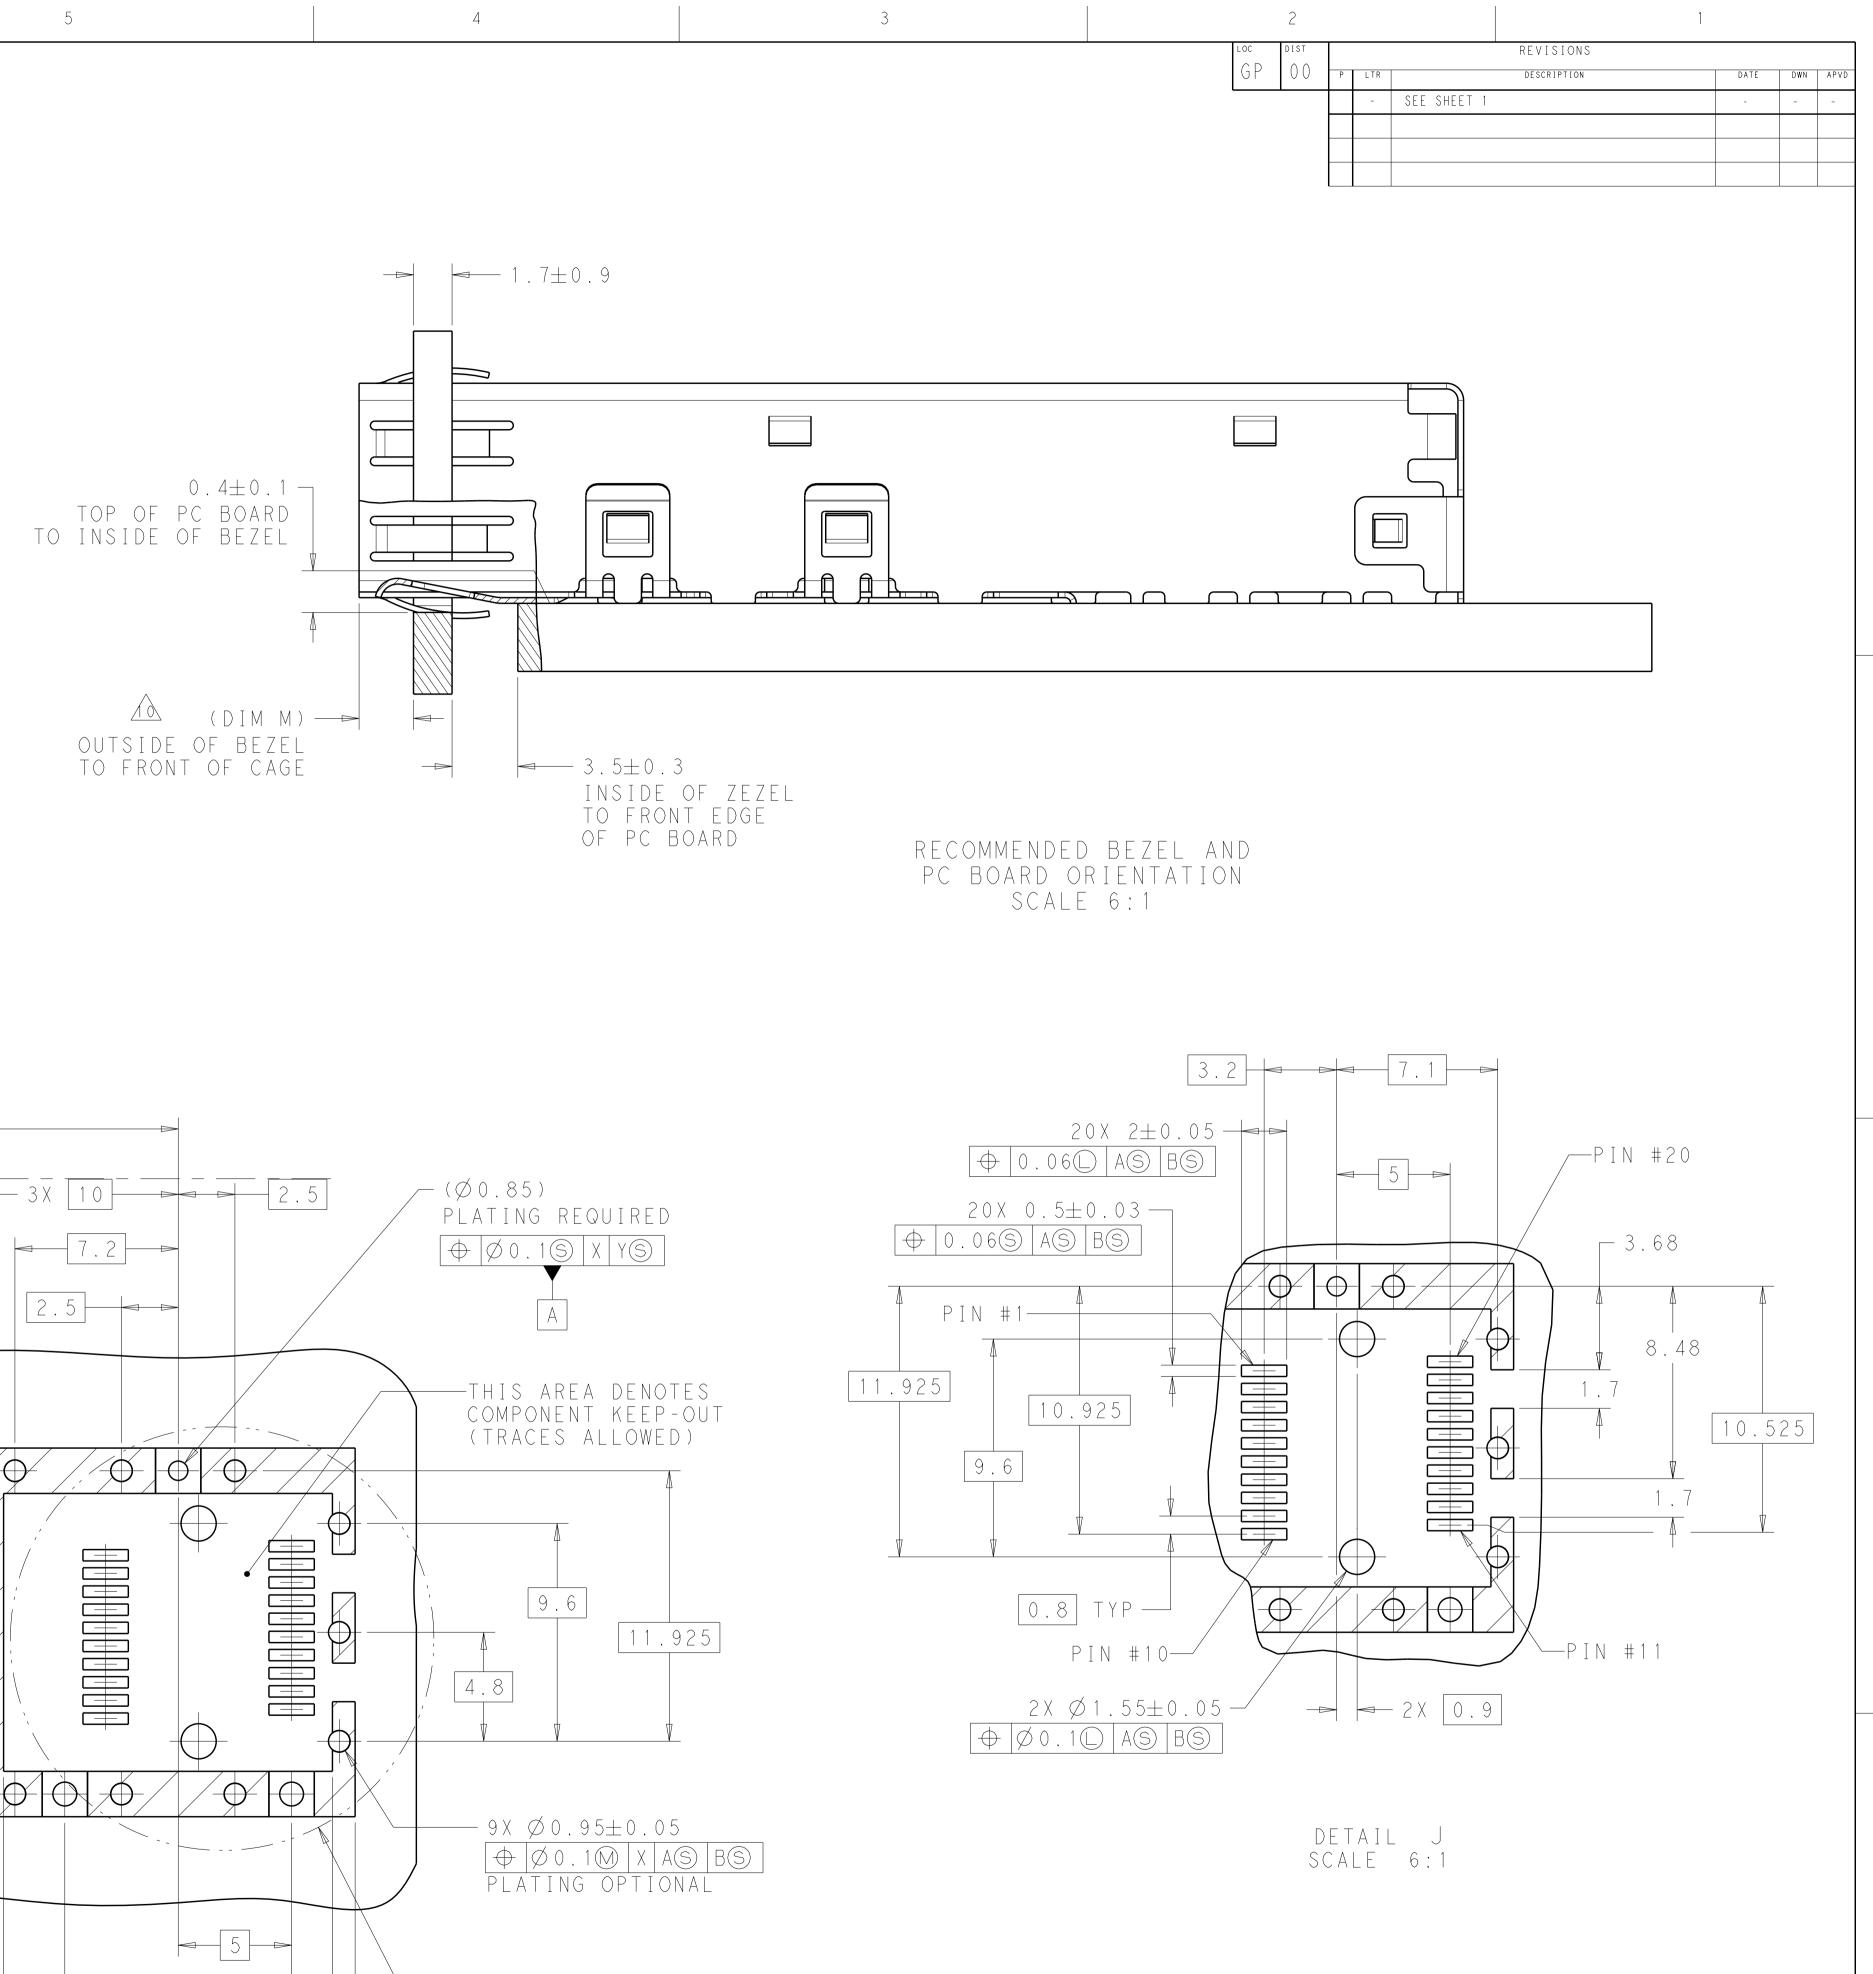

| . CONTROLLED DOCUMENT. AND TOLERANCING Y14.5M-2009 | | DWN 06NOV2012 C. VALENTINE снк 06NOV2012 M. SCHMITT | ETE TE Connectivity | | |
|--|---|--|---|--|--|
| | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.2 2 PLC ±0.1 3 PLC ±0.1 | | SFP, 1X1 SINGLE PIECE CAGE, 11 PRESS FIT, HEAT SINK OPENING - | | |
| | 4 PLC ±- ANGLES ±- FINISH - | ин 114 - 13120 weight | size cage code drawing no restricted to - | | |
| | - | Customer Drawing | SCALE 6:1 SHEET 2 F2 REV B | | |

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)