



Customer Modified Part

101A073-3-G03

a. Part as supplied.

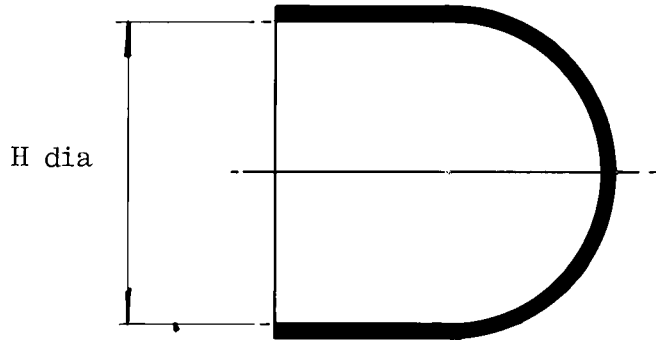

b. Part after unrestricted recovery.

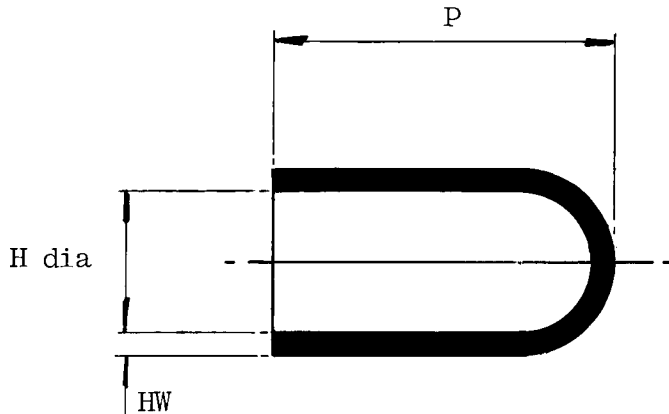

Dimensions (in millimetres)

Part No.	min a	H	max b	P ± 15% b	HW +20% b
101A073-3-G03	40		19,1	45	2,5

Drawn G. Evans Checked *W. Ellis* Issue 2 Date Aug '86


Approval

Design *GW*


MKTG *FD*

Q.C. *[Signature]*

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale



Ordering Information

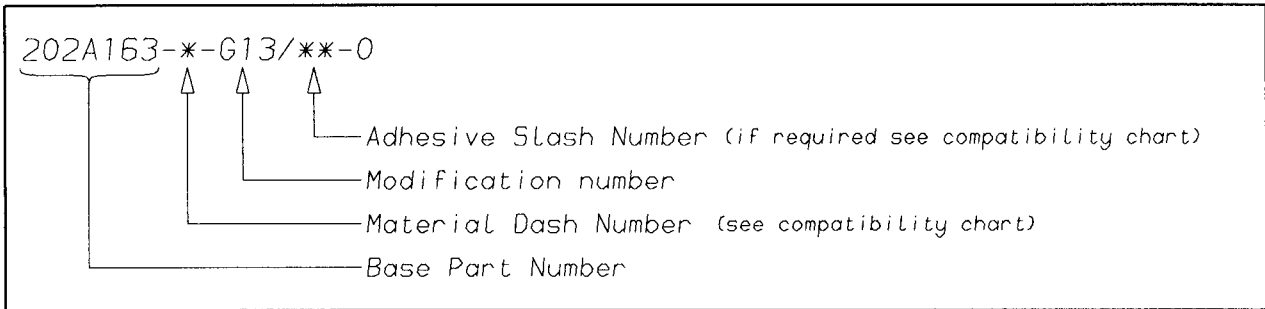

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)