

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm.
DIMENSIONS IN mm.

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)


NOTE (NOTES)

- 1 MATERIALI (MATERIALS) :
CONTATTO : LEGA DI RAME, NICHELATO E DORATO /STAGNATO
BLOCCETTO : RESINA POLIESTERE CARICATA VETRO UL94 V-0
COLORE NERO PER P/NS 281523 E 281524 ;
COLORE GRIGIO PER P/N 284709
- ESPULSORE : RESINA POLIAMMIDICA CARICATA VETRO UL94 V-0
COLORE NERO PER P/NS 281523 E 281524 ;
RESINA POLIESTERE CARICATA VETRO UL94 V-0
COLORE GRIGIO PER P/N 284709
- (POST : COPPER ALLOY, GOLD DUPLEX PLATED OVER NICKEL
- HOUSING : GLASS FIBER FILLED PBT F.R.
COLOUR BLACK FOR P/NS 281523 AND 281524 ;
COLOUR GREY FOR P/N 284709
- LATCH : GLASS FIBER FILLED POLYAMIDE F.R.
COLOUR BLACK FOR P/NS 281523 AND 281524 ;
GLASS FIBER FILLED PBT F.R.
COLOUR GREY FOR P/N 284709)

- 2 QUESTA POLARIZZAZIONE NON E' ESISTENTE NEI CONNETTORI A 10 E 14 POSIZIONI
(AT THIS SIDE OF CONNECTOR NO POLARIZATION ON 10 AND 14 POSITION VERSIONS)
- 3 AMMESSO IMBARCAMENTO $\pm 0,25/50$ PER 60 POSIZIONI
(ADMITTED WARPING $\pm 0,25/50$ FOR 60 POSITIONS)
- * P/NS OBSOLETI (OBSOLETED P/NS)

QUESTO CONNETTORE E' APPROVATO E CERTIFICATO
(THIS CONNECTOR IS APPROVED AND CERTIFIED)

OBSOLETE

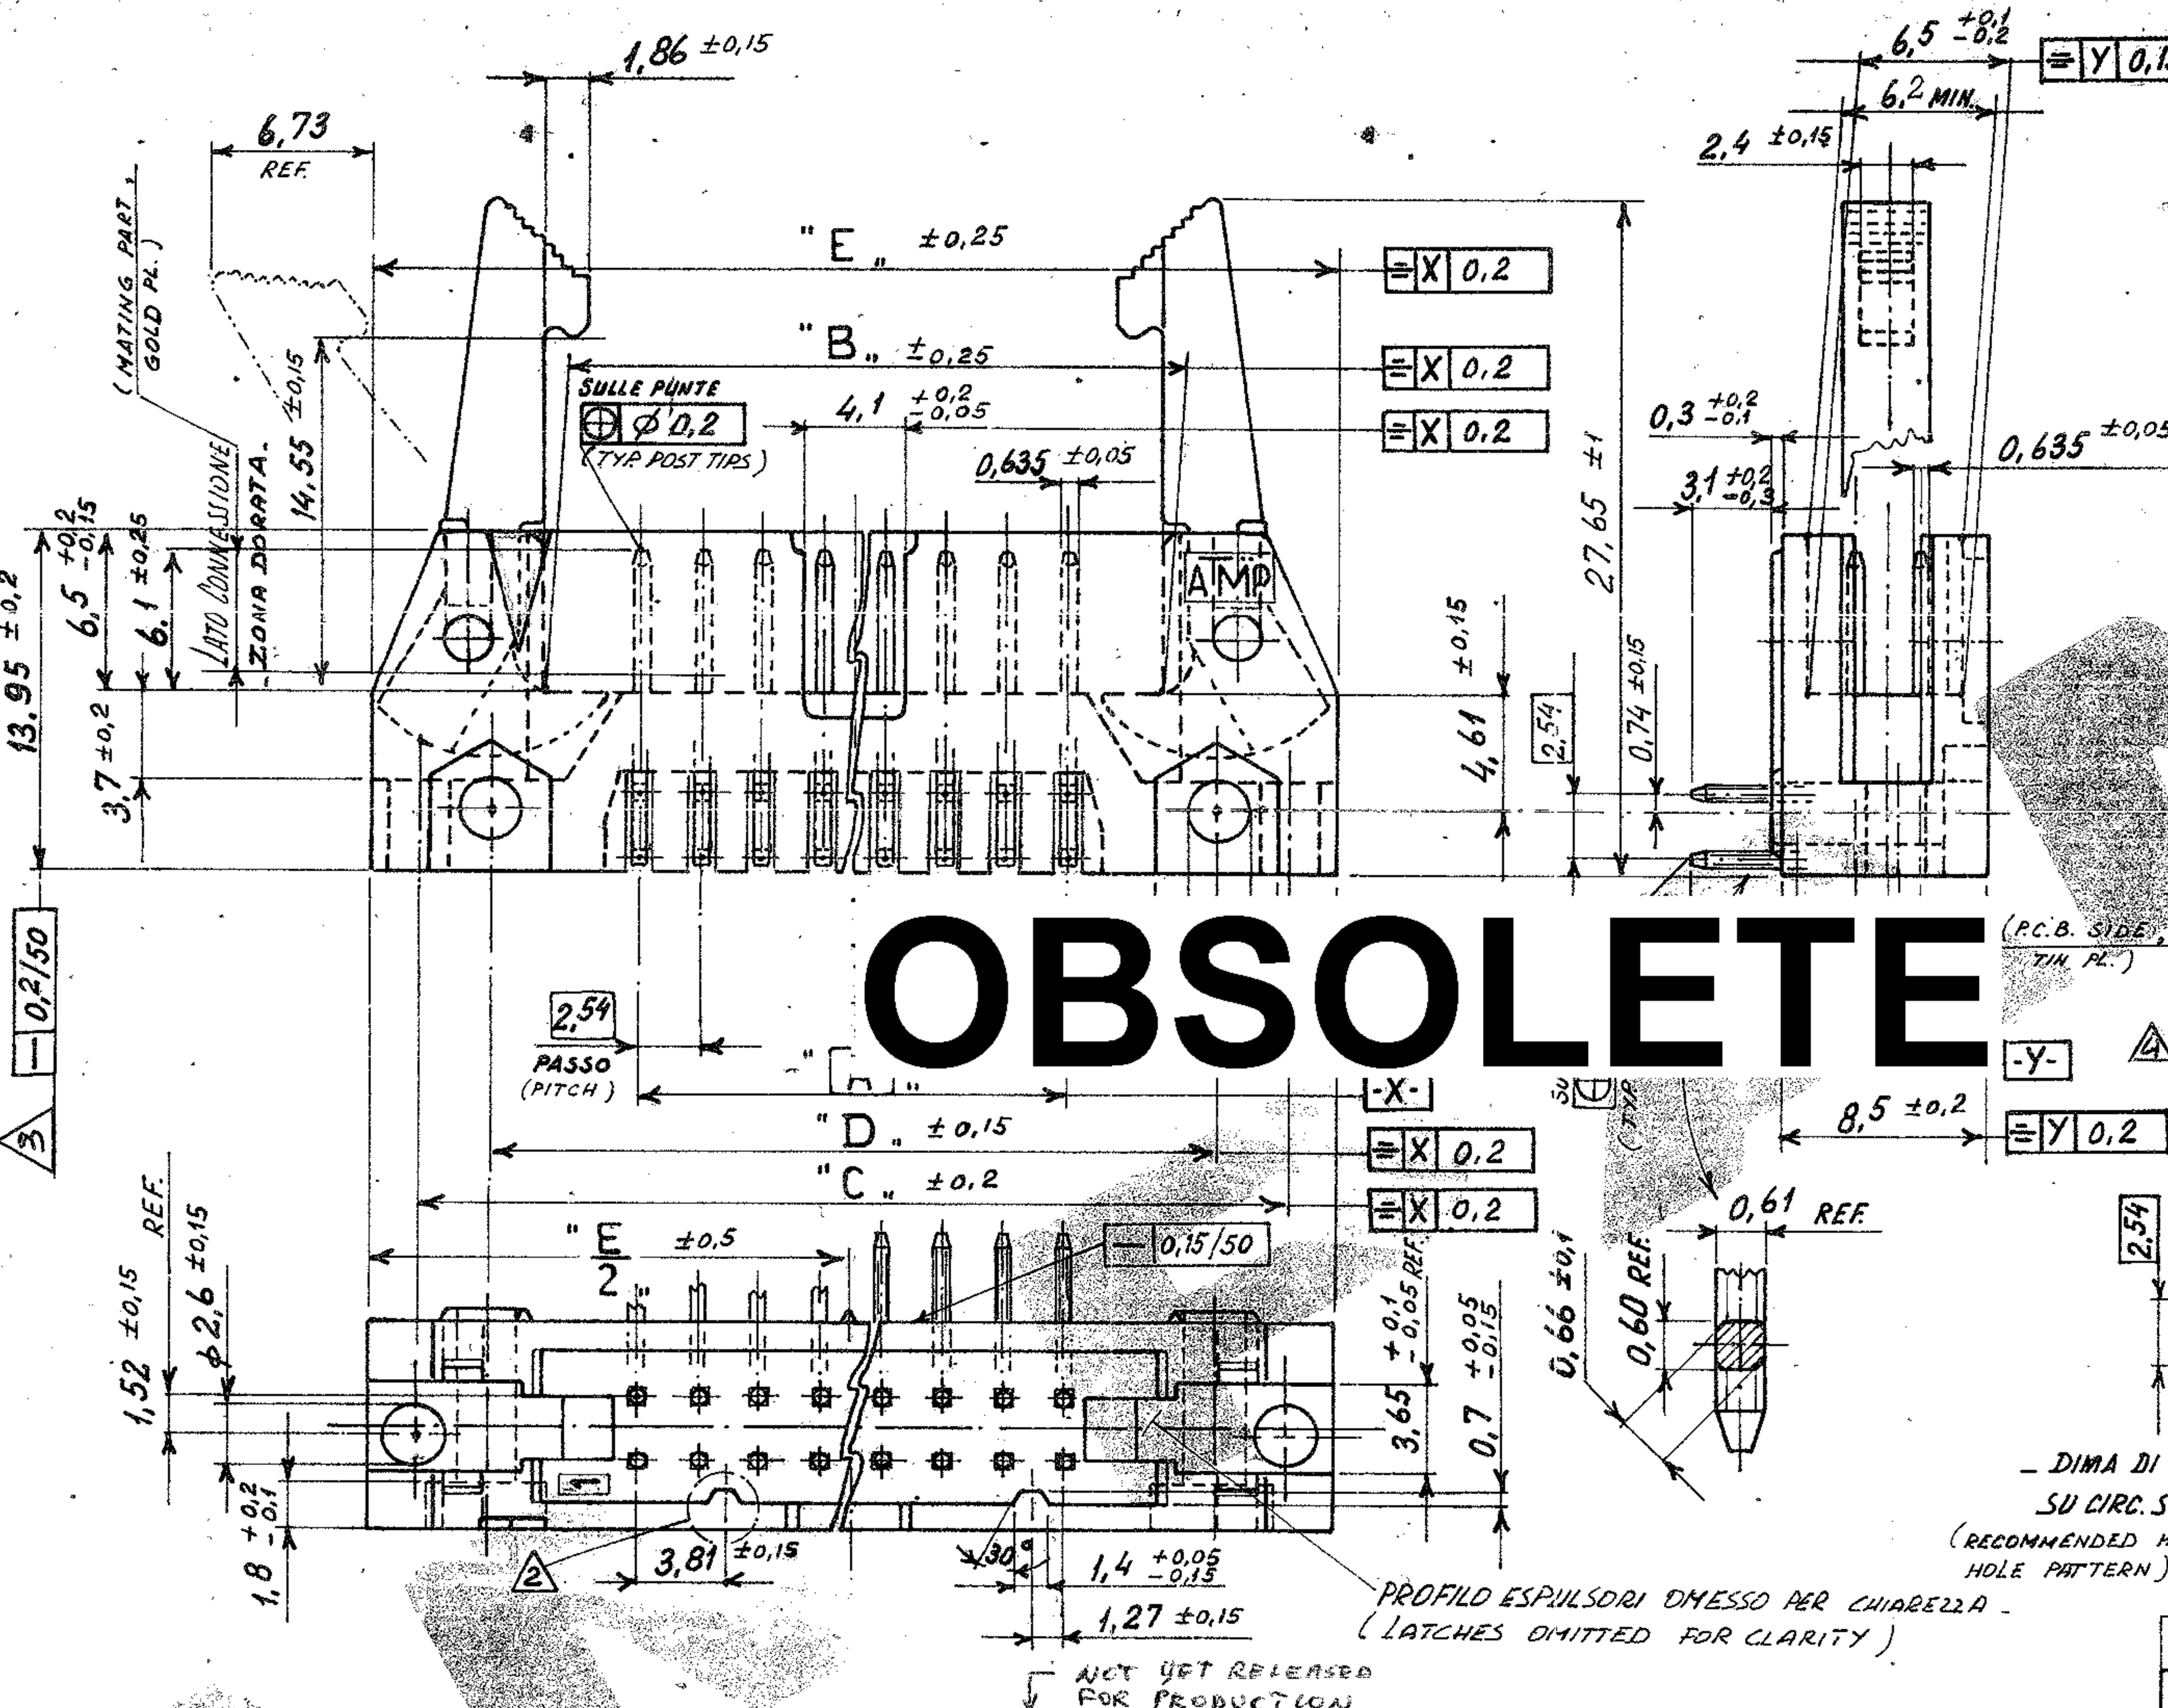

(P.C.B. SIDE, TYP. R.)

- DIMA DI FORATURA SU CIRC. STAMPATO -
(RECOMMENDED MOUNTING HOLE PATTERN)

60	73,66	81,28	91,44	85,34	95,50	6-	-0	6-	-0	6-	-0*
50	60,96	68,58	78,74	72,64	82,80	5-	-0	5-	-0	5-	-0*
44	53,34	60,96	71,12	65,02	75,18	4-	-4	4-	-4*	4-	-4
40	48,26	55,88	66,04	59,94	70,10	4-	-0	4-	-0	4-	-0*
34	40,64	48,26	58,42	52,32	62,48	3-	-4	3-	-4	3-	-4*
26	30,48	38,10	48,26	42,16	52,32	2-	-6	2-	-6	2-	-6*
20	22,86	30,48	40,64	34,54	44,70	2-	-0	2-	-0	2-	-0*
16	17,78	25,40	35,56	29,46	39,62	1-	-6	1-	-6	1-	-6
14	15,24	22,86	33,02	26,92	37,08	1-	-4	1-	-4	1-	-4
10	10,16	17,78	27,94	21,84	32,00	1-284709-0		1-281523-0		1-281524-0*	
No OF POS.	A	B	C	D	E	CONN. P/N (0,2mm Au DUPLEX) COL. GRIGIO		CONN. P/N (0,2mm Au DUPLEX) COL. NERO		CONN. P/N (0,76mm Au DUPLEX) COL. NERO	

G	OBSOLETED										
F	ADDED GREY VERSION'S P/N 284709 ETC - 0153-01										
E	REVISED PER ETOO-0325-97										
D	ADDED NOTE ETOO-0254-96										
C	per ECN I-3233										
B	Aggiunta Nota LL e CSA, VERS. 0,2mm Au 0,38mm										
A	III PRODUZIONE, ACCIUNTO 44 & 60 POS.										
REV.	REVISIONI (REVISION RECORD)										
DIS.	DATA (DATE)										

FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)
CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION 19
© COPYRIGHT 1988 BY AMP INCORPORATED, HARRISBURG, PA ALL INTERNATIONAL RIGHT RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING		
OCCORRENZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)
± 0,3		
ANGOLI (ANGLES) ± 2°	AMP AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGGNO (TORINO)	
DESCRIZIONE (DESCRIPTION) MIL TYPE, WITH STAMPED/ROUNDED POST - 2,54 x 2,54 GRID - (RIGHT ANGLE VERS. WITH LATCH 14,55)	DIS. (DR.) 10/10/83	
LOC. SIZE	NUMERO (DWG NO) 281523 - ...	REV. FOGLIO (SHEET) DI 1 (OF) 1
IA3	C - 281524 - ...	G

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)