

# SPECIFICATION CONTROL DRAWING


**55PC6178**

TITLE TWO CONDUCTOR CABLE, DOUBLE SHIELDED, JACKETED, 600 VOLT

Date 04-05-01

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

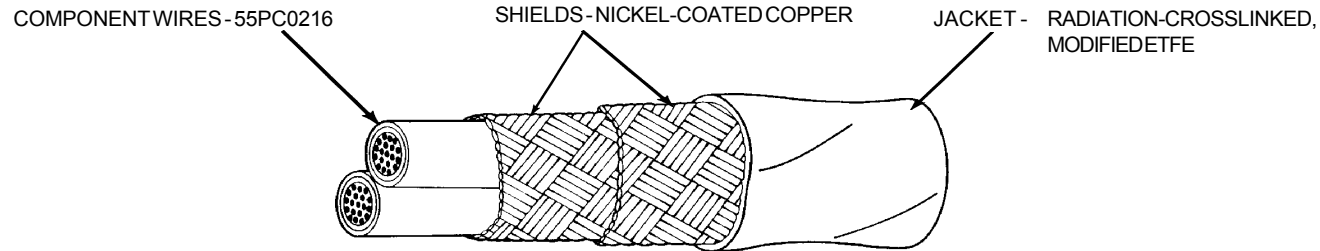

### CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	INNER SHIELD SIZE (AWG)	OUTER SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
				LOWERSPEC LIMIT	TARGET WALL	LOWERSPEC LIMIT	TARGET VALUE	UPPERSPEC LIMIT	TARGET VALUE	UPPERSPEC LIMIT
55PC6178-24-*	24	38	38	.0055	.0070	.123	.128	.133	14.48	15.03
55PC6178-22-*	22	38	38	.0055	.0070	.135	.140	.145	17.56	18.14
55PC6178-20-*	20	38	38	.0055	.0070	.152	.157	.162	22.27	22.92
55PC6178-18-*	18	38	38	.0060	.0075	.172	.177	.182	28.84	29.66
55PC6178-16-*	16	38	38	.0060	.0075	.187	.192	.197	33.97	34.86

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test  
 SHIELD COVERAGE: 85% (minimum) (each)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by a color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 22, red and blue component wires;  
 white jacket: 55PC6178-22-2/6-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)