
NOTES: UNLESS OTHERWISE SPECIFIED. 1. PART NUMBER CHANGES AND OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING. 2. MATERIALS: INSULATORS: THERMOPLASTIC, GLASS REINFORCED, COLOR BLACK. UL94V-0 FLAMMABILITY RATED. POWER CONTACTS: PHOSPHOR BRONZE ALLOY, GUIDE PIN: BRASS COPPER ALLOY. 3. FINISHES: CONTACTS: GOLD PLATE .000030" MIN, THK, DVER NICKEL .000040" MIN. THICK TERMINALS: TIN PLATE, MATTE FINISH 000040" MIN. THICK GUIDE PIN: NICKEL PLATE 4 ACTIVE GUDE PINS ACCEPT M3 SCREWS, (USER SUPPLIED). 5. ITEMS PROVIDED TO THIS SPECIFICATION TO BE PERMANENTLY IDENTIFIED PER THE FOLLOWING IDENTIFIER: TYCO PART NO. DATE CODE (e.g. 0626) XXXXXXX-X XXXX


		REVISIONS	
EC	REV	DESCRIPTION	DATE
CPR	Α	NEW RELEASE	1/26/06


6. MODULE INFORMATION

CONNECTOR	TYCO PART NUMBER	CATALOG MODULE #	QTY	SIZE ND.	CONTACT QTY	MATING PIN	MAX. CURRENT (PER CONTACT)	CONTACT SPACING	V□LTAGE RATING*
SOCKET	6646614-1	FP0200	3	8	3	1.25 X 7.00 [.049 X .276]	45 AMPERES	7.50 [.2953]	250 VOLTS
		FP0401	1	22	24	.64 [.025] SQ.	3 AMPERES	2.50 [.0984]	125 VOLTS
		FP0515	1	ACTIVE STRAIGHT GUIDE PIN					

*IAW IEC-950

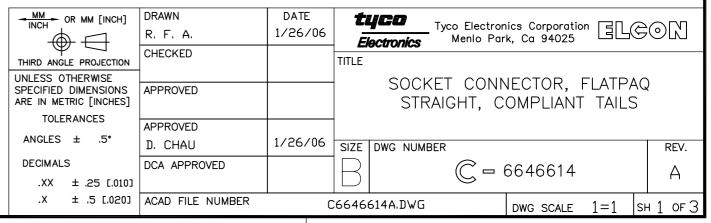

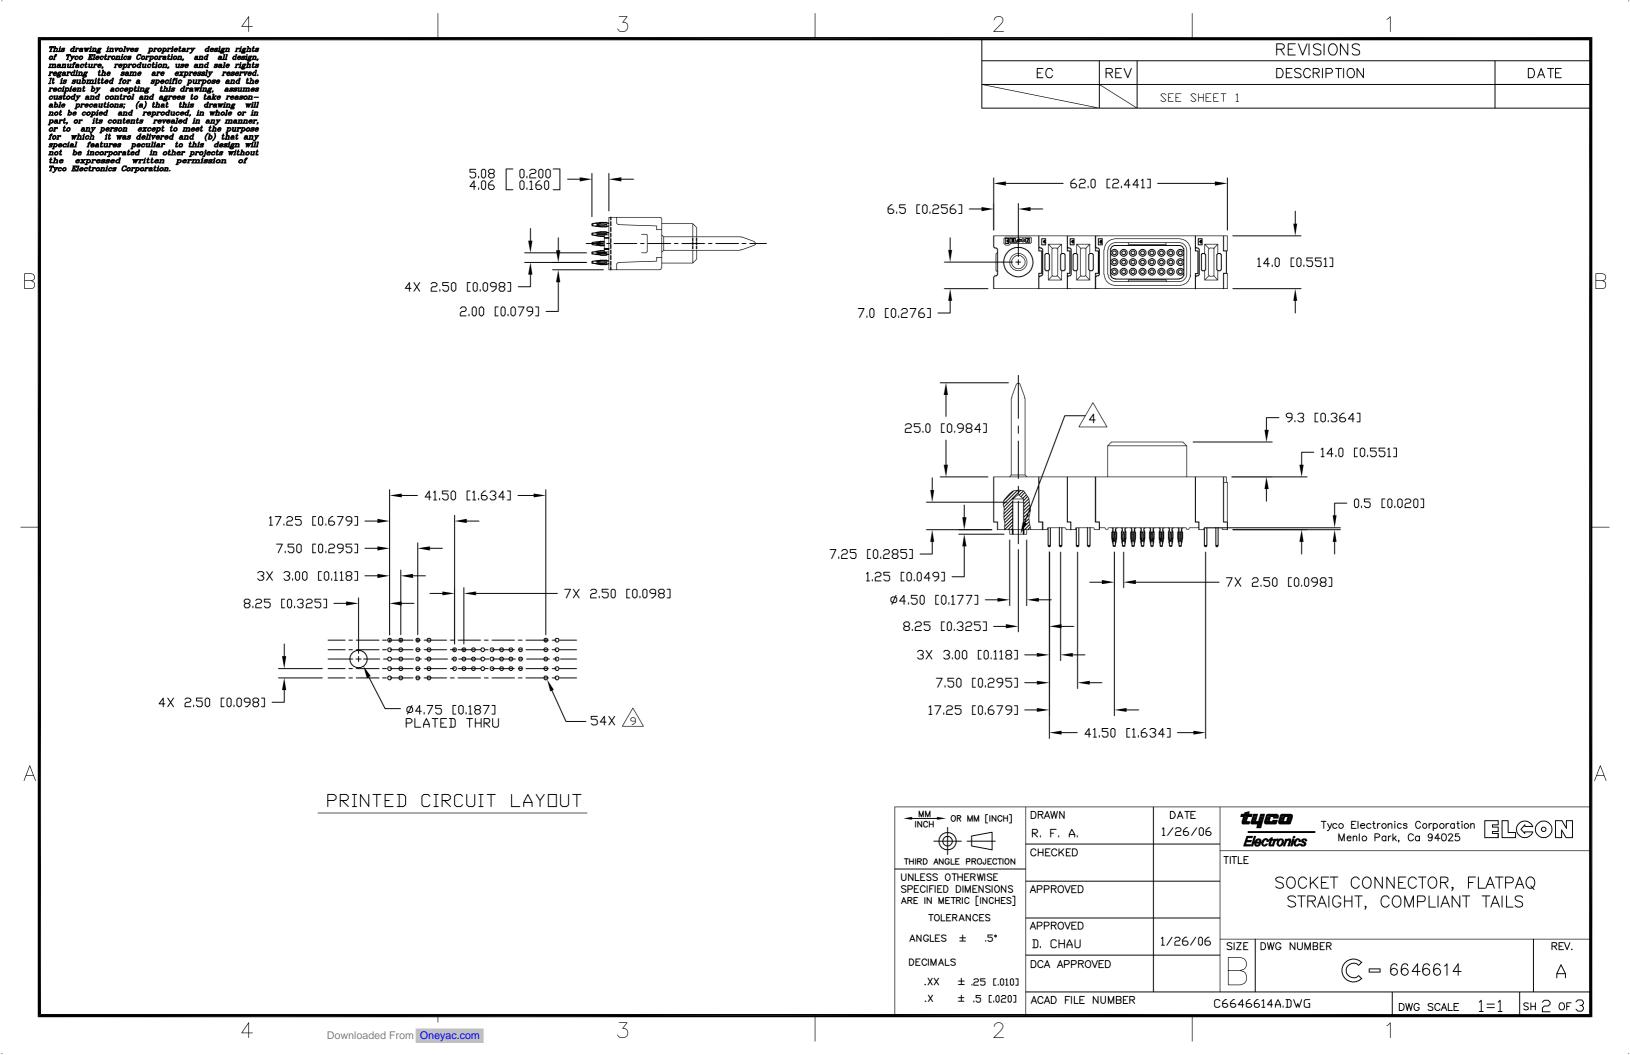

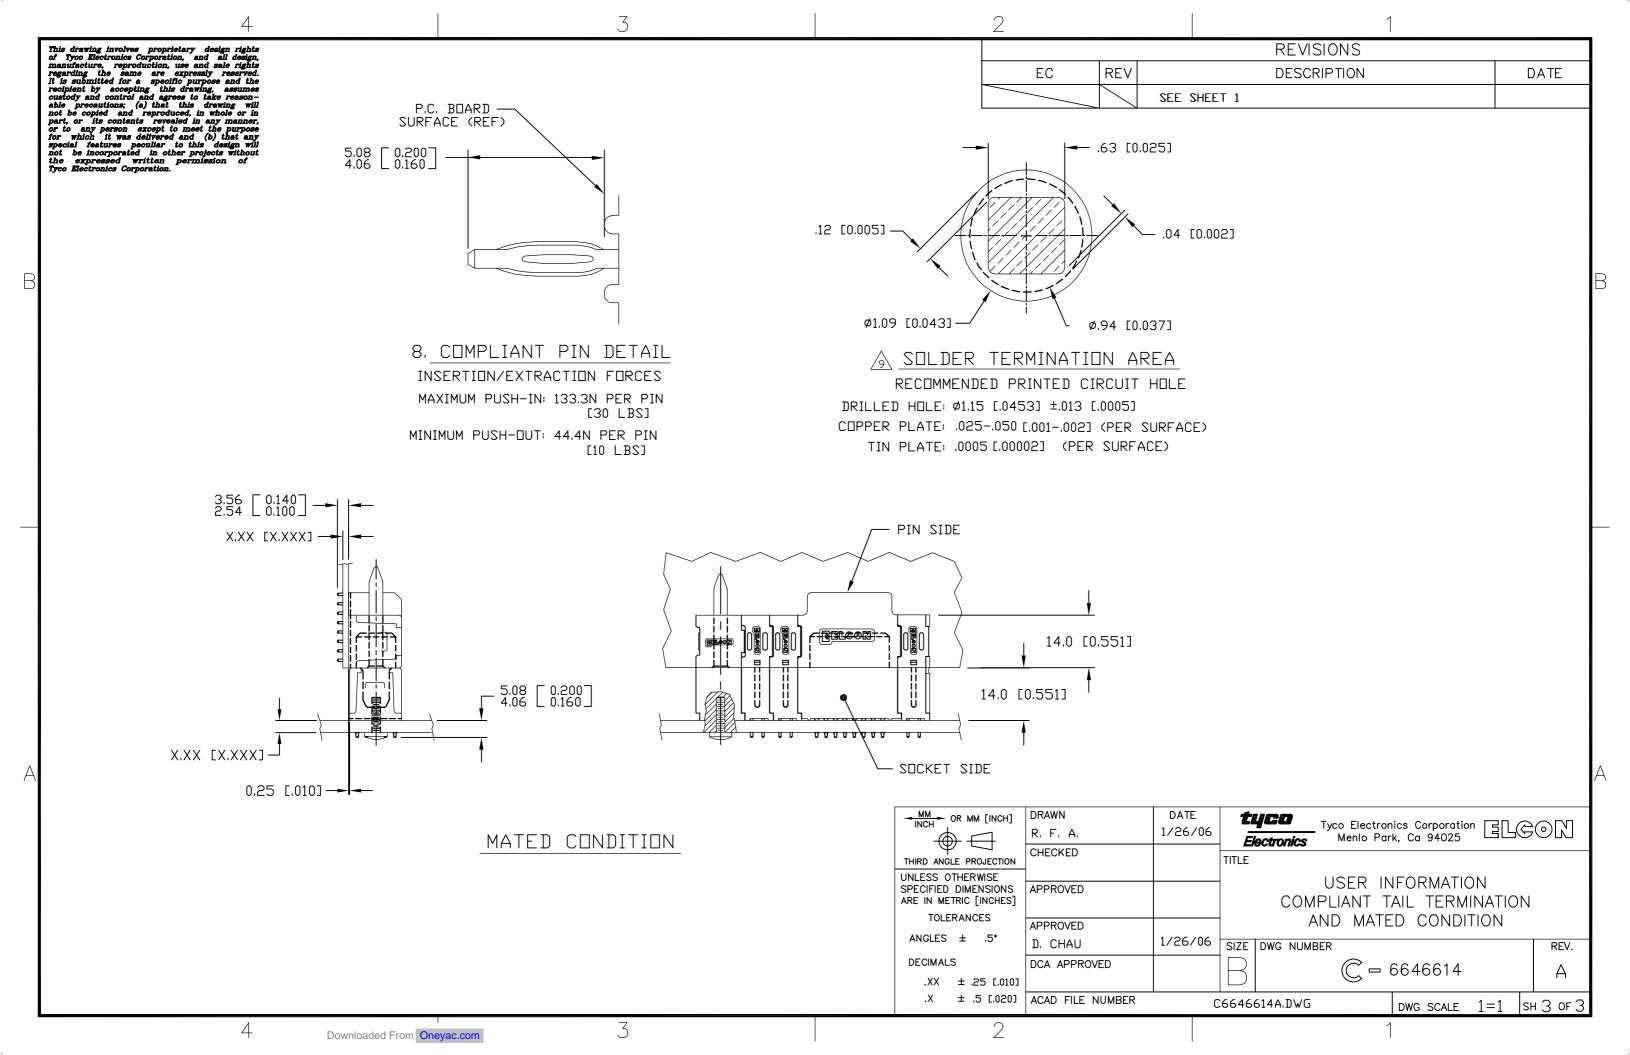

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)