


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	C	ECO-13-005473	4-17-13	CT	DE		

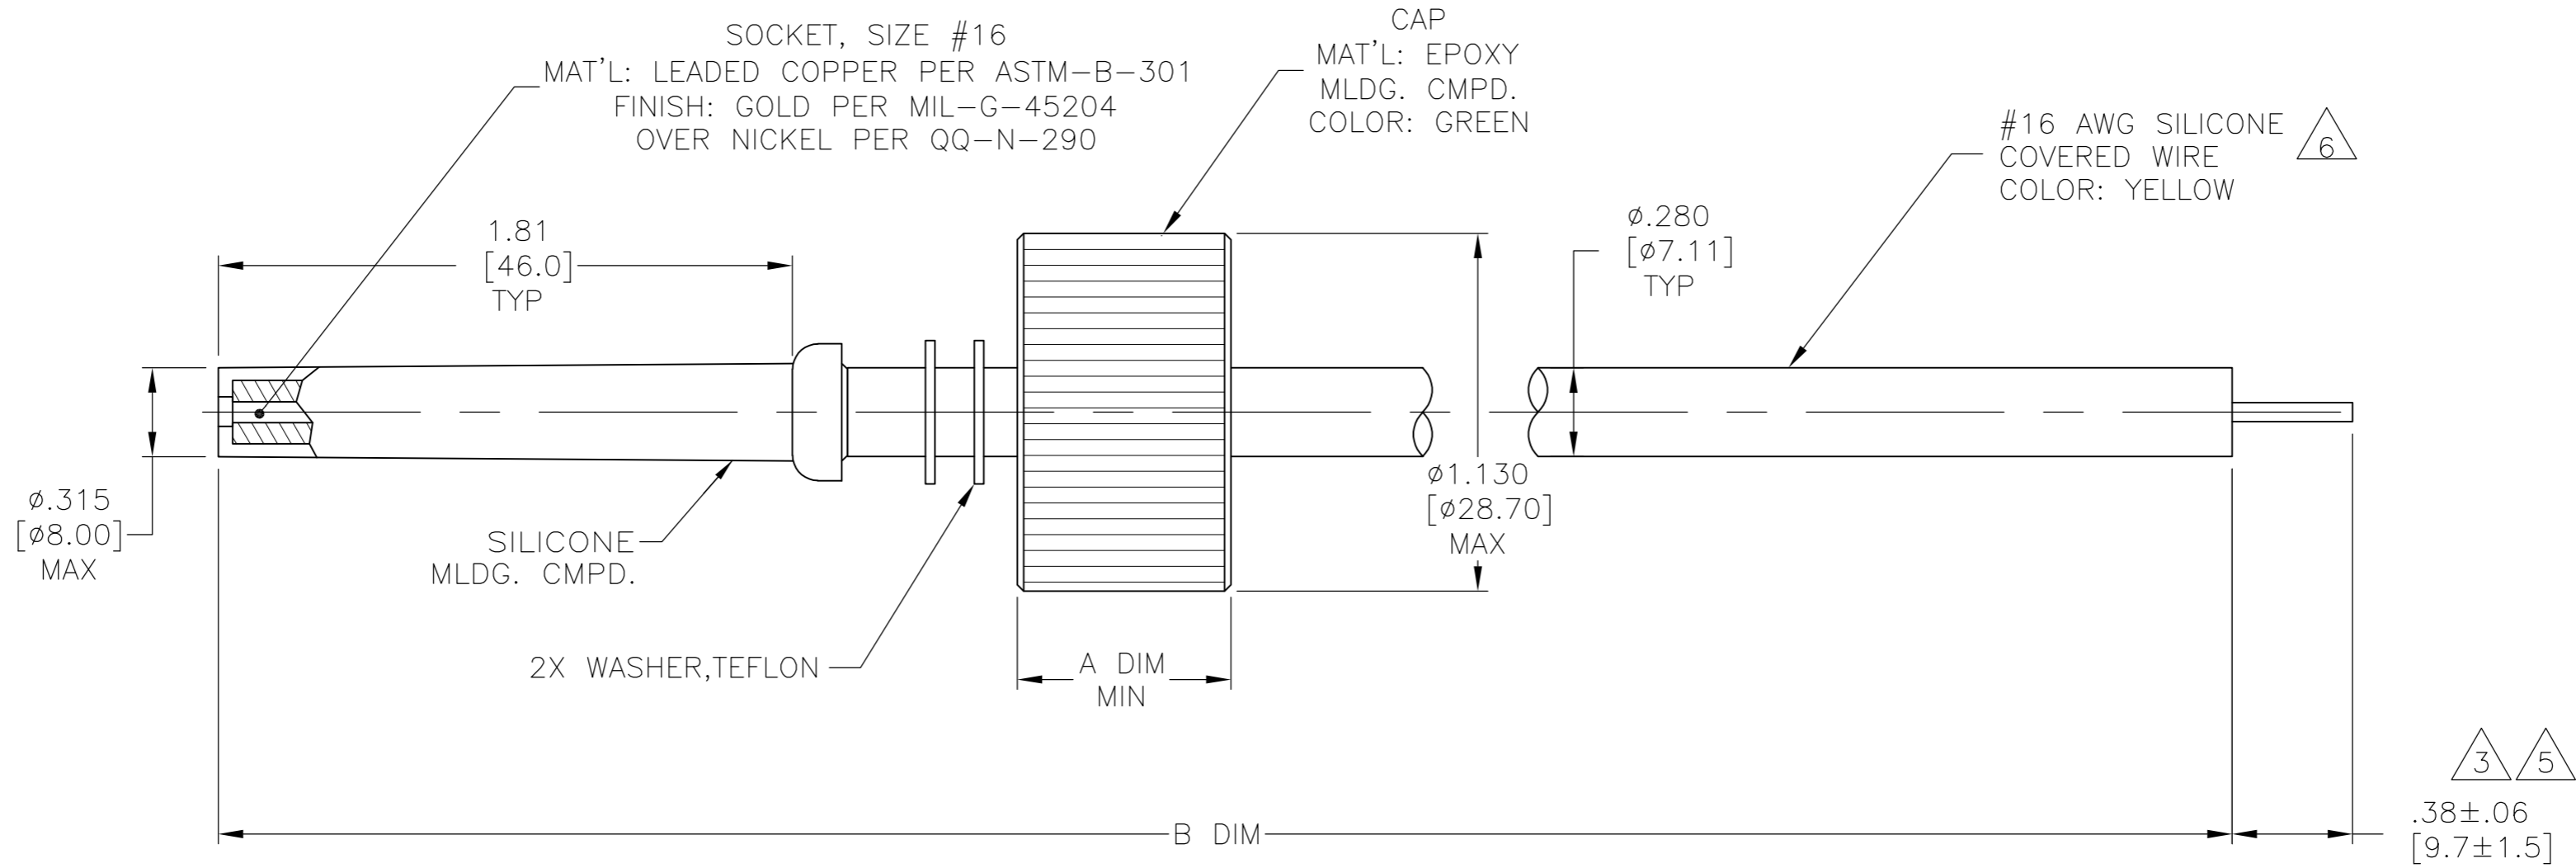

1. MARKED PER MIL-STD-130.
2. LEADS WILL MATE WITH AMP LGH-3 RECEPTACLE WITH 1.81 [46.0] BARREL DEPTH.
3. PIGTAIL IS SOLDER DIPPED.
4. OPERATING VOLTAGE: 40 KVDC AT 0 TO 70,000 FEET, -55° C TO 125° C.
5. INSULATION CUT, BUT NOT REMOVED
6. YELLOW WIRE DOES NOT HAVE A SOLID YELLOW INSULATION BUT IS A WHITE WIRE WITH A YELLOW STRIPE.

REMARKS	DIM B	DIM A MIN	PART NUMBER
5	60.00±1.00 [1524.0±25.4]	.67 [17.0]	5-868353-2
3	60.00±1.00 [1524.0±25.4]	.67 [17.0]	868353-2
3	18.00±.12 [457.2±3.0]	.55 [13.8]	868353-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.C.THOMAS	12-15-97	
		CHK	D.EABY	12/15/97	
		APVD	-	-	
		NAME			
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	LEAD ASSY, SGL END, LGH-3		
INCHES [mm]	0 PLC ± -	APPLICATION SPEC	WIRE COLOR: WHITE AND YELLOW STRIPED		
	1 PLC ± -		SIZE	CAGE CODE	DRAWING NO
	2 PLC ± .02 [0.5]		A2	00779	868353
	3 PLC ± -		SCALE	SHEET	REV
	4 PLC ± -		2:1	1 of 1	C
	ANGLES ± -		CUSTOMER DRAWING		
MATERIAL	FINISH	WEIGHT			
SEE CALLOUTS	SEE CALLOUTS	-			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)