


DO NOT SCALE
DIMENSIONS IN mm




METRIC

THIRD ANGLE
PROJECTION



NOTES:

- 1 FOR MINI-APPLICATOR CRIMPING.
- 2 FOR STANDARD-APPLICATOR CRIMPING.
- 3 FOR LOOSE-PIECE VERSIONS SEE DWG. 166297
- 4 UNDERCOATING: 1,3µm Ni.
SELECTIVE : 0,8µm Au.
ZONE I : BRIGHT TIN PLATED.

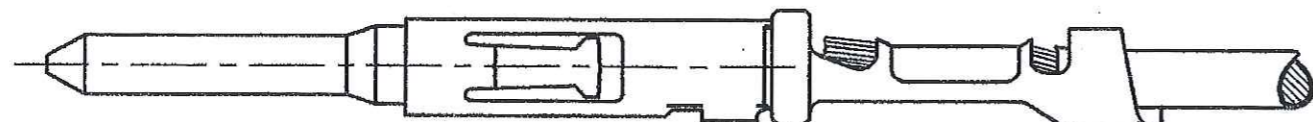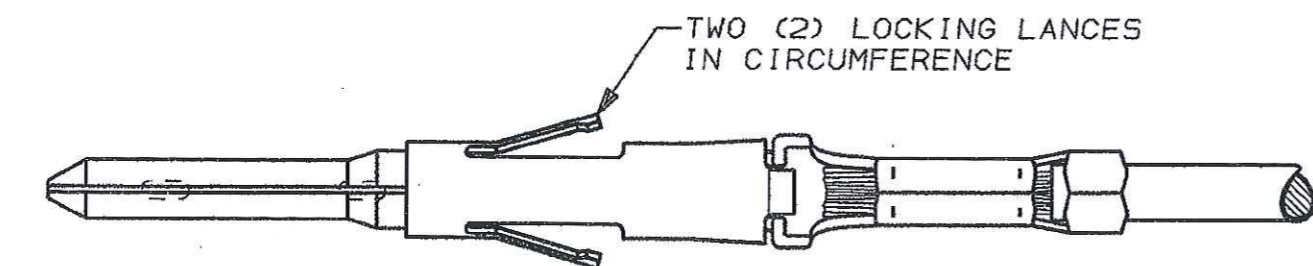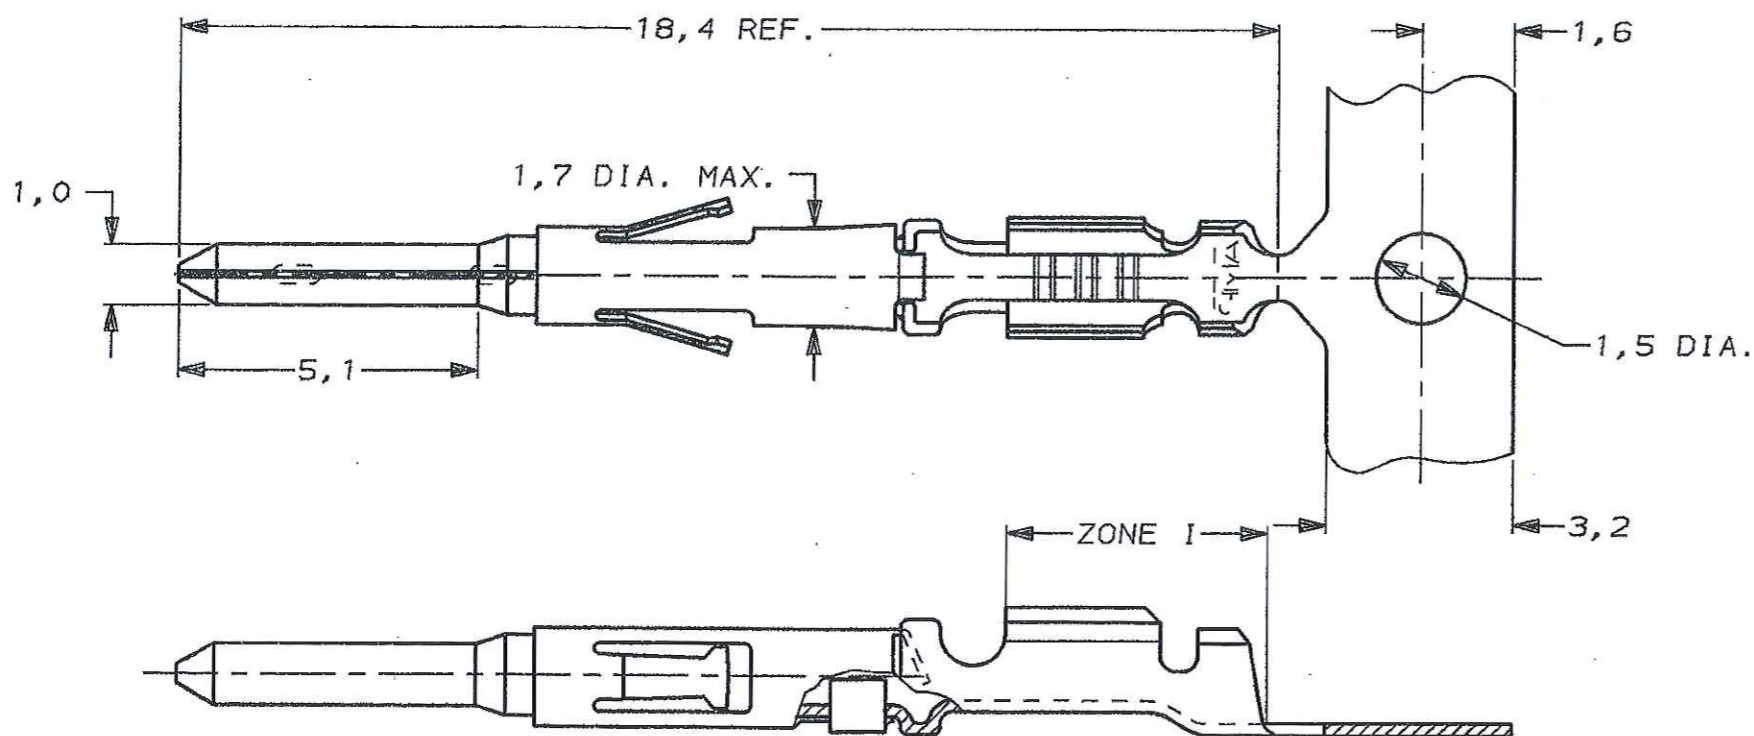

WIRE RANGE :
(0,05-0,14mm²) 26-30 AWG
INSULATION RANGE :
1,22 DIA. MAX.

SEE NOTE 4	STAINLESS STEEL	BRASS	166047-3
SEE NOTE 4			166047-1
PLATING OF BODY	MATERIAL OF SLEEVE	MATERIAL OF BODY	PARTNUMBER

CUSTOMER DRAWING				FOR REFERENCE ONLY WILL NOT BE UPDATED	
© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION					
AMP			AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.		
F	CLARIFIE ROHS FINISH YP YP	06-03-93	NAME		
E	EH-0077-92	JvL CvT 04-03-94	CONTACT ASSEMBLY-PIN TYPE XI, SIZE 20		
LTR.	REVISION RECORD	DR. CHK. DATE	DWG. No.		
DR. J.v.LIEMPT	CHK. C.v.TILBURG	APP. I.v.SOEST	C-166047		REV. LTR. SHEET
DATE: 6 JAN 1993	DATE: 08-02-93	DATE: 08-02-93			F 1 OF 1 A3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)