


CUSTOMER DRAWING

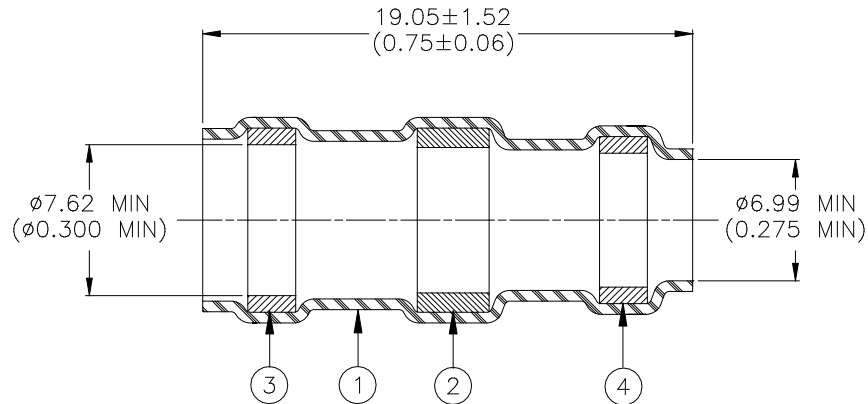


MATERIALS


1. **INSULATION SLEEVE:** Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. **SOLDER PREFORM WITH FLUX:**
SOLDER: TYPE Sn63 per ANSI J-STD-006.
FLUX: TYPE ROM 1 per ANSI-J-STD-004.
3. **MELTABLE RING:** Thermally stabilized thermoplastic, color-blue.
4. **MELTABLE RING:** Thermally stabilized thermoplastic, color-natural.

APPLICATION

1. This part is designed for termination of nickel plated copper shields on cables having insulations rated for 125°C.
2. Part may be used on cables having a maximum “D” diameter of 7.62 (0.300) and a minimum “E” diameter of 4.06 (0.160) when measured as shown.

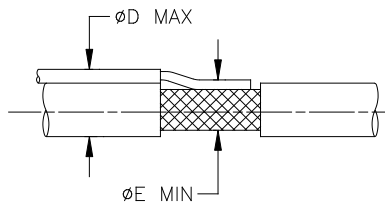

3. This part will meet the requirements of Raychem Specification RT-1404.
4. For assembly technique, see RCPS 100-70.

		Raychem THERMOFIT DEVICES		TITLE: SOLDERSLEEVE HIGH TEMPERATURE HIGH FLUX CONTENT (FOR NICKEL WIRE) 7.62 (0.30) I.D.		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-103-54		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV : 2	DATE : 17-APR-2020	
DRAWN BY: M. FORONDA	DATE: 06-JUL-00	ECO: ECO-20-005247	SCALE: NTS	SIZE: A	SHEET: 1 of 1	

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)