
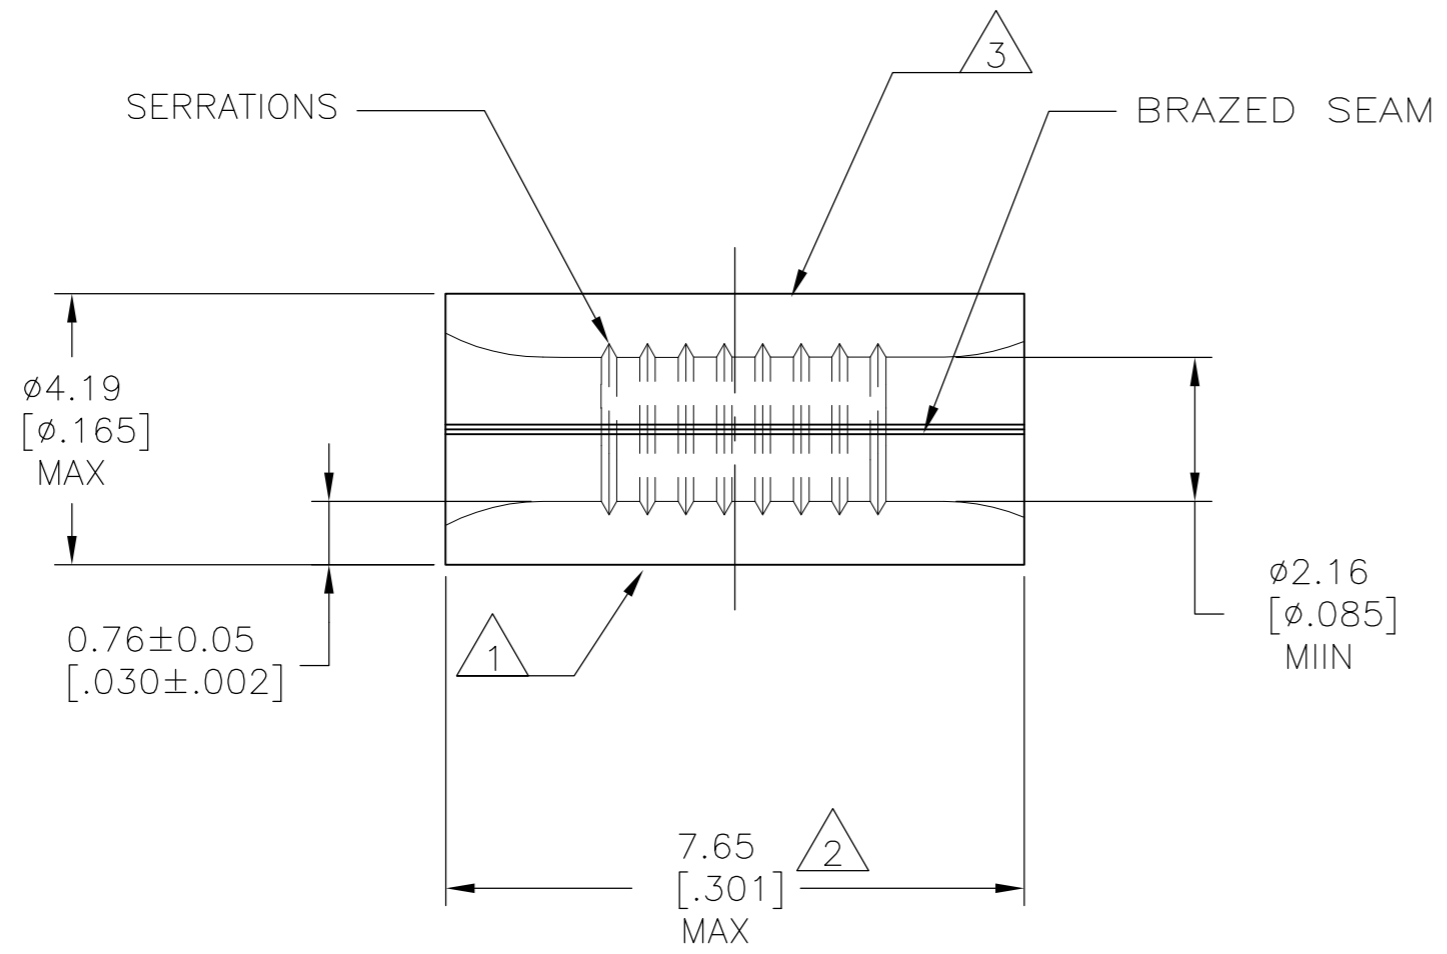


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14						
		G3		REVISED PER ECO-14-019230	03APR2015	NK	DR

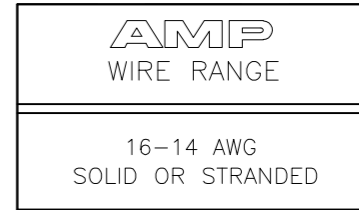

- 1 STAMP "AMP 16-14 2 1/2-4" APPROX AS SHOWN.
- 2 MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS.
- 3 WIRE BARREL COLOR CODED ORANGE TO DENOTE NICKEL MATERIAL.
- 4 NOTE DELETED.
- 5 NICKEL PER ASTM B-162, ANNEALED.

CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING TEMPERATURE:  
649°C [1200°F] MAX

VOLTAGE RATING:  
N/A

CIRCULAR MIL AREA:  
1.04-2.62mm<sup>2</sup> [2,050-5,180]  
SOLID OR STRANDED

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER  
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION

TOOLING ASSISTANCE CENTER  
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

1000	LOOSE PIECE	3 322347
QTY	PACKAGE TYPE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TA BRINKMAN	4-19-93		TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK	DA PATTERSON	4-19-93		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	JL MECKLEY	4-19-93		SPLICE, PARALLEL, HIGH TEMPERATURE, STRATO-THERM		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC				SIZE	CAGE CODE	DRAWING NO
MATERIAL	FINISH	WEIGHT			A2	00779	C=322347	
5		CUSTOMER DRAWING		SCALE	10:1	SHEET	1 of 1	
				REV	G3			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)