


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	CORRECTED UL WIRE SIZE CHART	24AUG04	JR	TM
	H2	REVISED PER ECO-17-014338	28MAR2018	RS	DR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
12-10 AWG SOLID OR STRANDED	12 AWG STRANDED	12-10 AWG SOLID OR STRANDED

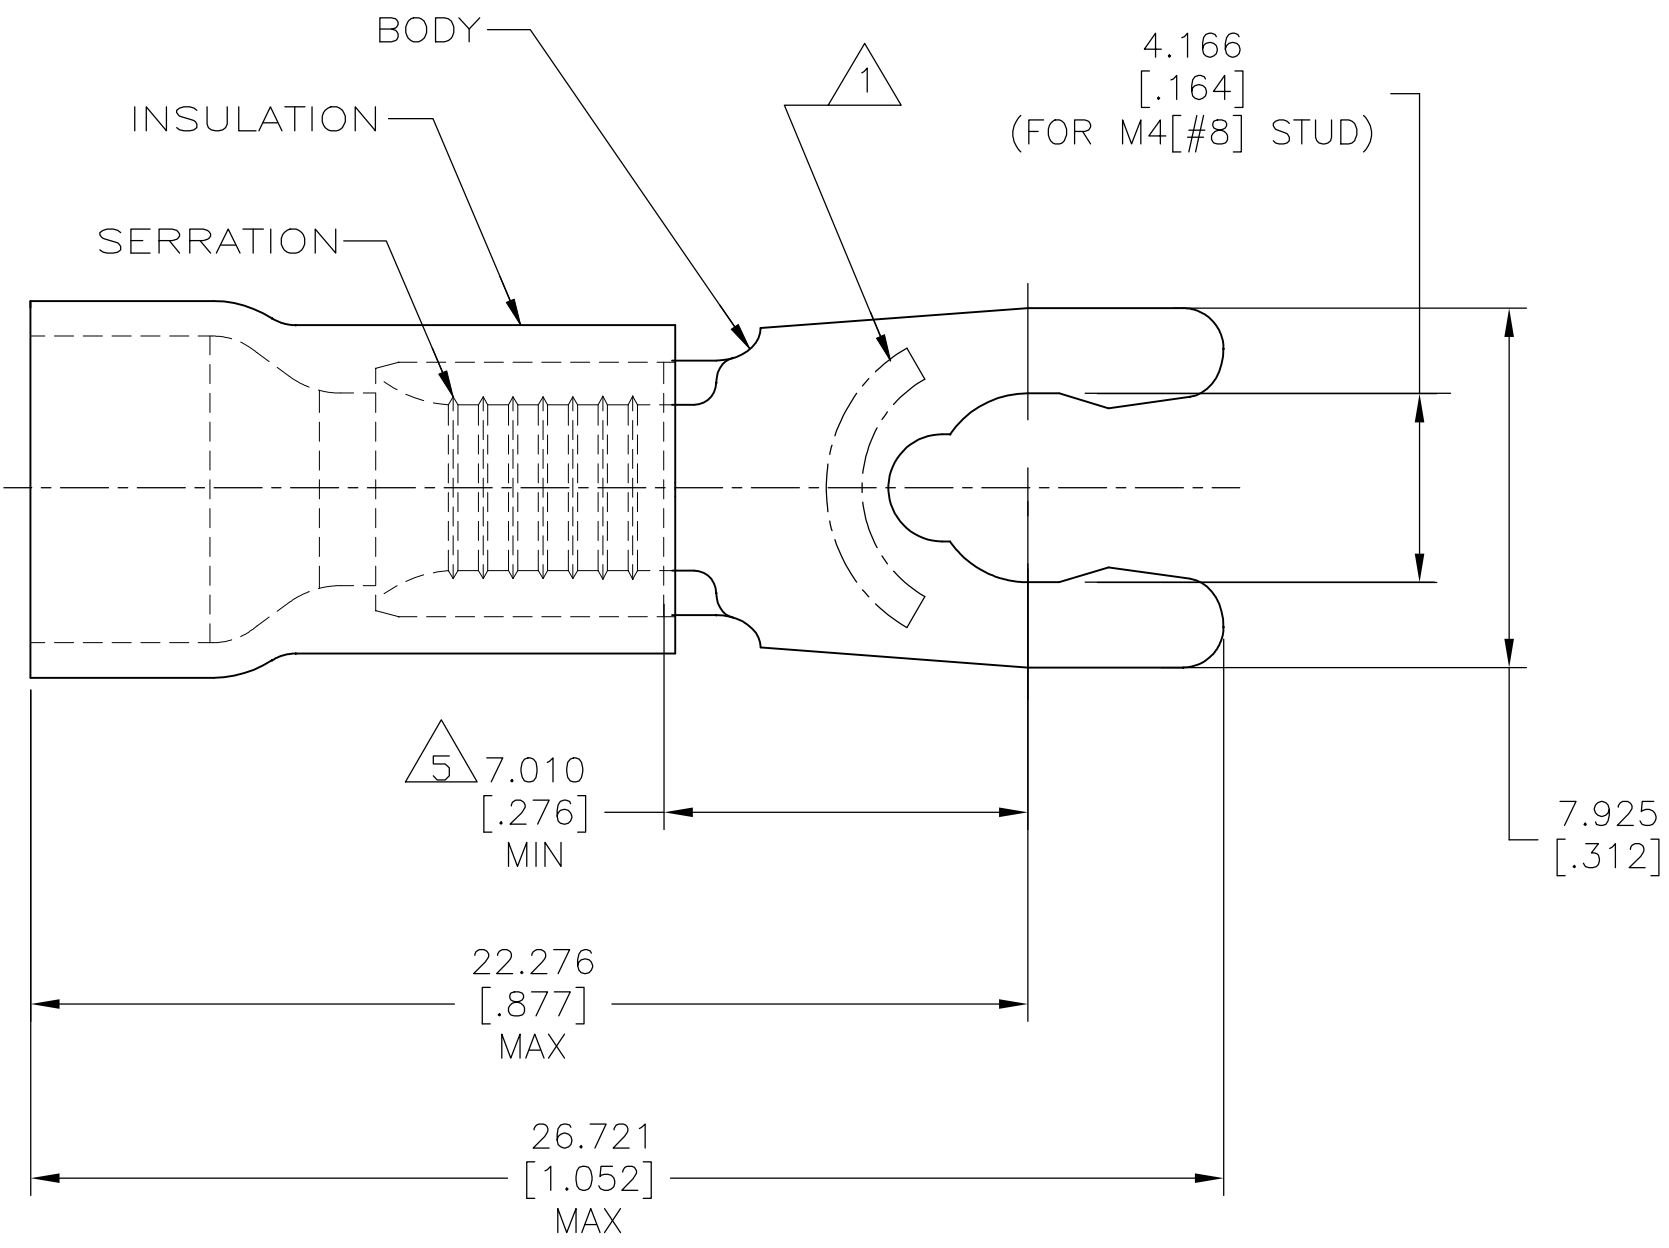

- ① STAMP 8SAMP 12-10* APPROX AS SHOWN
- 2. WIRE INSUL DIA, 3.810-6.350 [.150-.250]
- 3. BODY MATL THK, 1.016±0.051[.040±.002]
- ④ MATERIAL: BODY - BRASS PER ASTM B36
INSULATION - PVC.
- ⑤ APPLIES FROM CENTER OF STUD HOLE TO
EDGE OF METAL WIRE BARREL

2500	ON TAPE, REEL	53247-2
500	LOOSE PIECE	53247-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 26JUN95	TE Connectivity Ltd.				
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 26JUN95				NAME	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APVD G NGO 26JUN95	TERMINAL, SPRING SPADE, SHORT, PLASTI-GRIP WIRE SIZE: 12-10 AWG				
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL ④	FINISH BODY: TIN PER ASTM B545 INSULATION: COLOR-YELLOW	PRODUCT SPEC UL 486A-B	SIZE A3	CAGE CODE 00779	DRAWING NO C-53247	RESTRICTED TO -	
					WEIGHT	SCALE 6:1			SHEET 1 OF 1	REV H2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)