THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T2	REVISED PER ECO-11-005027	12MAR11	RK	HMR

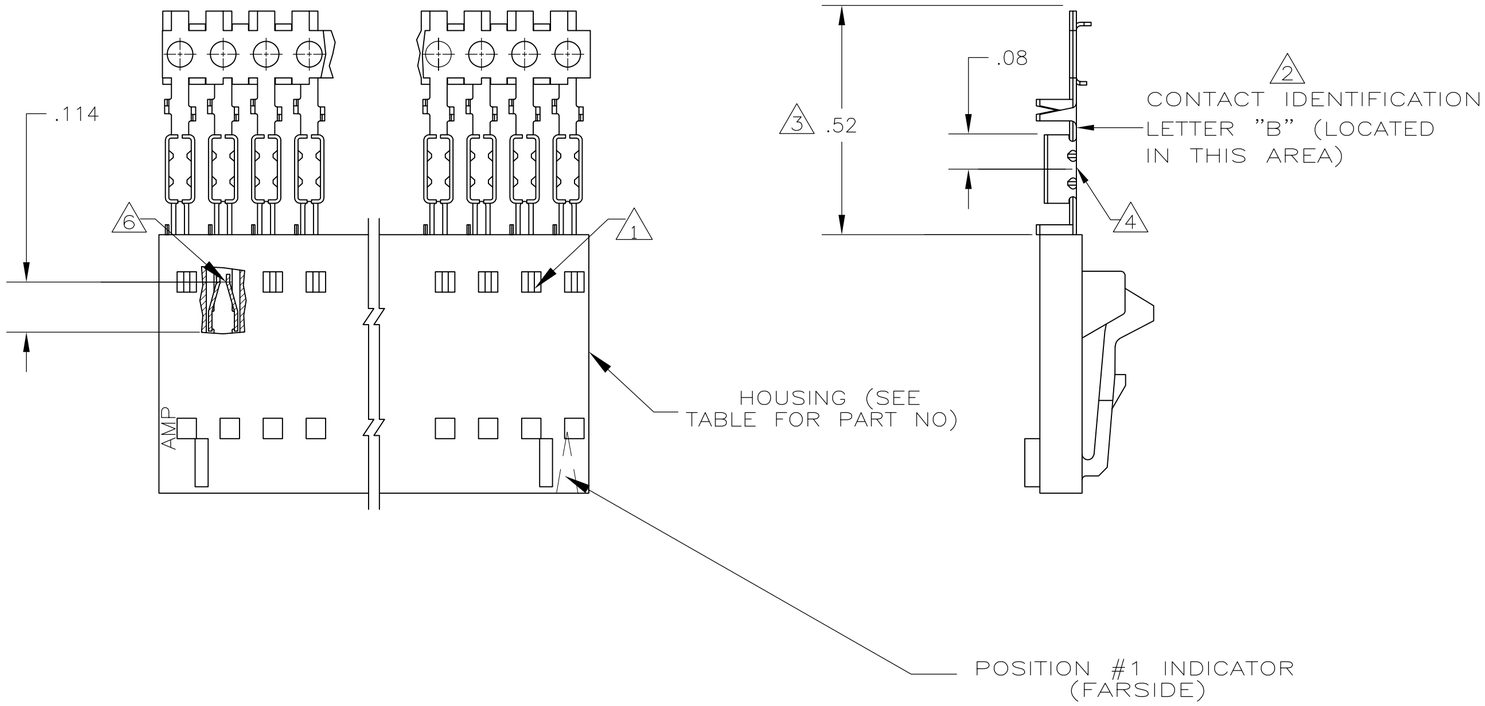



9 OBSOLETE	8	2-104257-4	25	7-103645-4
	8	2-104257-3	24	7-103645-3
	8	2-104257-2	23	7-103645-2
	8	2-104257-1	22	7-103645-1
	8	2-104257-0	21	7-103645-0
	8	1-104257-9	20	6-103645-9
9 OBSOLETE	8	1-104257-8	19	6-103645-8
	8	1-104257-7	18	6-103645-7
	8	1-104257-6	17	6-103645-6
	8	1-104257-5	16	6-103645-5
9 OBSOLETE	8	1-104257-4	15	6-103645-4
	8	1-104257-3	14	6-103645-3
	8	1-104257-2	13	6-103645-2
9 OBSOLETE	7	2-104257-4	25	2-103645-4
	7	2-104257-3	24	2-103645-3
	7	2-104257-2	23	2-103645-2
	7	2-104257-1	22	2-103645-1
	7	2-104257-0	21	2-103645-0
	7	1-104257-9	20	1-103645-9
9 OBSOLETE	7	1-104257-8	19	1-103645-8
	7	1-104257-7	18	1-103645-7
	7	1-104257-6	17	1-103645-6
	7	1-104257-5	16	1-103645-5
9 OBSOLETE	7	1-104257-4	15	1-103645-4
	7	1-104257-3	14	1-103645-3
9 OBSOLETE	7	1-104257-2	13	1-103645-2
SUPERSEDED BY 1-103956-1		1-104257-1	12	1-103645-1
SUPERSEDED BY 1-103956-0		1-104257-0	11	1-103645-0
SUPERSEDED BY 103956-9		104257-9	10	103645-9
SUPERSEDED BY 103956-8		104257-8	9	103645-8
SUPERSEDED BY 103956-7		104257-7	8	103645-7
SUPERSEDED BY 103956-6		104257-6	7	103645-6
SUPERSEDED BY 103956-5		104257-5	6	103645-5
SUPERSEDED BY 103956-4		104257-4	5	103645-4
SUPERSEDED BY 103956-3		104257-3	4	103645-3
SUPERSEDED BY 103956-2		104257-2	3	103645-2
SUPERSEDED BY 103956-1		104257-1	2	103645-1
	PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER

103645

1. CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
2. USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
3. THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
4. POINT OF MEASUREMENT FOR PLATING THICKNESS
5. FOR STRIP ASSEMBLIES SEE PART NUMBER 103956
6. POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
7. CONTACTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
8. .000100-.000200 MATTE TIN OVER .000050 NICKEL
9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: HOUSING FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
CONTACTS- PHOS BRONZE

FINISH: SEE TABLE

DWN L A MAYER 11-4-86
CHK P de JONG 11-12-86
APVD P de JONG 11-12-86
PRODUCT SPEC 108-25034
APPLICATION SPEC 114-25026
WEIGHT -

TE Connectivity

NAME: RCPT ASSY, AMPMODU MTE, SINGLE, LATCHED & POLARIZED, FOR #22-#26 AWG WIRE SIZE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-103645	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV T2

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>TE Connectivity(泰科)

Downloaded From Oneyac.com