
CUSTOMER DRAWING

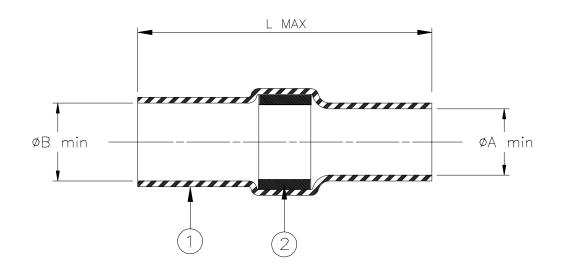

Product Dimensions				
L MAX	A min	B min		
27.6 (1.090)	2.7 (0.105)	3.2 (0.125)		
	L MAX 27.6	L MAX A min 27.6 2.7		

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyvinylidene fluoride, transparent blue.
- 2. SOLDER PREFORM WITH FLUX: Solder: Sn63 Pb37 per ANSI J-STD-006. Flux: ROL1 per ANSI-J-STD-004.

NOTES

- A. The parts covered by this drawing are for use in splicing tin or silver-plated solid conductors having a combined diameter between 1.27 (.050) and 2.54 (1.00) when twisted together.
- B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly. TEMPERATURE RATING: -55C to +150C.

🗧 Tyco Flectronics 🛛			Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.	TITLE: SOLDERSLEEVE DEVICE			
[Inches dimensions are shown in brackets] Dev			Raychem Devices	DOCUMENT NO.: D-110-41			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV:	DATE:	DATE: 26-Mar-08	
DRAWN BY: PTALLY	CAGE CODE: 06090	REPLACES: D980623	ECO NUMBER: 08-007722	SCALE: NTS	SIZE: A	SHEET: 1 of 1	

© 2008 Tyco Electronics Corporation. All rights reserved. If this document is printed it becomes uncontrolled. Check for the latest revision. 单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)