





## **SERIES I THERMISTORS**

Thermally Conductive Epoxy Coating
Ø 2.4 mm Maximum Diameter
32 AWG Alloy 180 Leads
Four Temperature Tolerance Classifications Available
RoHS Compliant

BetaCURVE series I thermistors are small epoxy coated devices with solid tin-plated lead wires. The series I offers a choice of precision temperature tolerance classifications for a wide variety of customer applications, such as temperature measurements, temperature indication, temperature control, and thermal compensation.

#### **FEATURES**


- Interchangeability
- · Proven stability and reliability
- Rapid time response
- Alloy lead wires for reduced thermal conductivity ("stem effect")
- Thermally conductive epoxy coating
- Temperature range -40°C to +125°C
- Custom probe assemblies available

#### **APPLICATIONS**

- Temperature sensing, control and compensation
- Tight tolerance instrumentation
- General instrumentation applications

#### **SERIES I THERMISTORS**

### **MECHANICAL DETAILS**

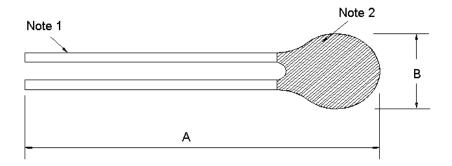

#### **DIMENSIONS**

Α	В			
76 ±2 mm	2.4 mm max.			

Note 1: 32 AWG Solid Alloy 180 Leads

Note 2: Stycast 2850ft Epoxy

### PRODUCT DETAILS

Part Number	Color Coding	Resistance [Ω] @ +25°C	Tolerance from 0 to +70°C	Alpha Value @ +25°C	Beta Value 25/85	Beta Tolerance	Dissipation Constant in Still Air @+25°C	Time Response (Stirred Oil)
GA2.2K3A1A	– – Brown –	2,252	±0.1ºC	- 4.39 %/ ºC -	3976	±0.5%	0.75 mW/°C	<1 second
GA2.2K3A1B			±0.2ºC					
GA2.2K3A1C			±0.5ºC					
GA2.2K3A1D			±1.0ºC					
GA3K3A1A	- - Red -	3,000	±0.1ºC	- 4.39 %/ ºC -	3976	±0.5%	0.75 mW/°C	<1 second
GA3K3A1B			±0.2ºC					
GA3K3A1C			±0.5ºC					
GA3K3A1D			±1.0ºC					
GA5K3A1A	- Orange	5,000	±0.1ºC	- 4.39 %/ ºC -	3976	±0.5%	0.75 mW/°C	<1 second
GA5K3A1B			±0.2ºC					
GA5K3A1C			±0.5ºC					
GA5K3A1D			±1.0ºC					
GA10K3A1A	- - Yellow -	10,000	±0.1ºC	- 4.39 %/ ºC -	3976	±0.5%	0.75 mW/°C	<1 second
GA10K3A1B			±0.2ºC					
GA10K3A1C			±0.5ºC					
GA10K3A1D			±1.0ºC					
GA10K4A1A	- - Black -	10,000	±0.1ºC	- 4.04 %/ ºC -	3694	±0.5%	0.75 mW/°C	<1 second
GA10K4A1B			±0.2ºC					
GA10K4A1C			±0.5ºC					
GA10K4A1D			±1.0ºC					
GA30K5A1A	- - White -	30,000	±0.1ºC	- 4.30 %/ ºC -	3942	±0.5%	0.75 mW/°C	<1 second
GA30K5A1B			±0.2ºC					
GA30K5A1C			±0.5ºC					
GA30K5A1D			±1.0ºC					
GA30K6A1A	- Green	30,000	±0.1ºC	- 4.68 %/ ºC -	4261	±0.5%	0.75 mW/°C	<1 second
GA30K6A1B			±0.2ºC					
GA30K6A1C			±0.5ºC					
GA30K6A1D			±1.0ºC					
GA50K6A1A	- - Blue -	50,000	±0.1ºC	- 4.68 %/ <sup>º</sup> C -	4261	±0.5%	0.75 mW/°C	<1 second
GA50K6A1B			±0.2ºC					
GA50K6A1C			±0.5ºC					
GA50K6A1D			±1.0ºC					
GA100K6A1A	– – Violet –	100,000	±0.1ºC	- 4.68 %/ ºC -	4261	±0.5%	0.75 mW/°C	<1 second
GA100K6A1B			±0.2ºC					
GA100K6A1C			±0.5ºC					
GA100K6A1D			±1.0ºC					

NORTH AMERICA

Tel +1 800 522 6752 customercare.ando@te.com **EUROPE** 

Tel +31 73 624 6999 customercare.glwy@te.com **ASIA** 

Tel +86 0400 820 6015 customercare.chdu@te.com

#### te.com/sensorsolutions

BetaCurve, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.

## 单击下面可查看定价,库存,交付和生命周期等信息

# >>TE Connectivity(泰科)