


- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 4 HOUSING: GLASS FILLED THERMOPLASTIC, COLOR, BLACK. (WILL WITHSTAND VAPOR PHASE REFLOW.) CONTACT: COPPER ALLOY.
- 5 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

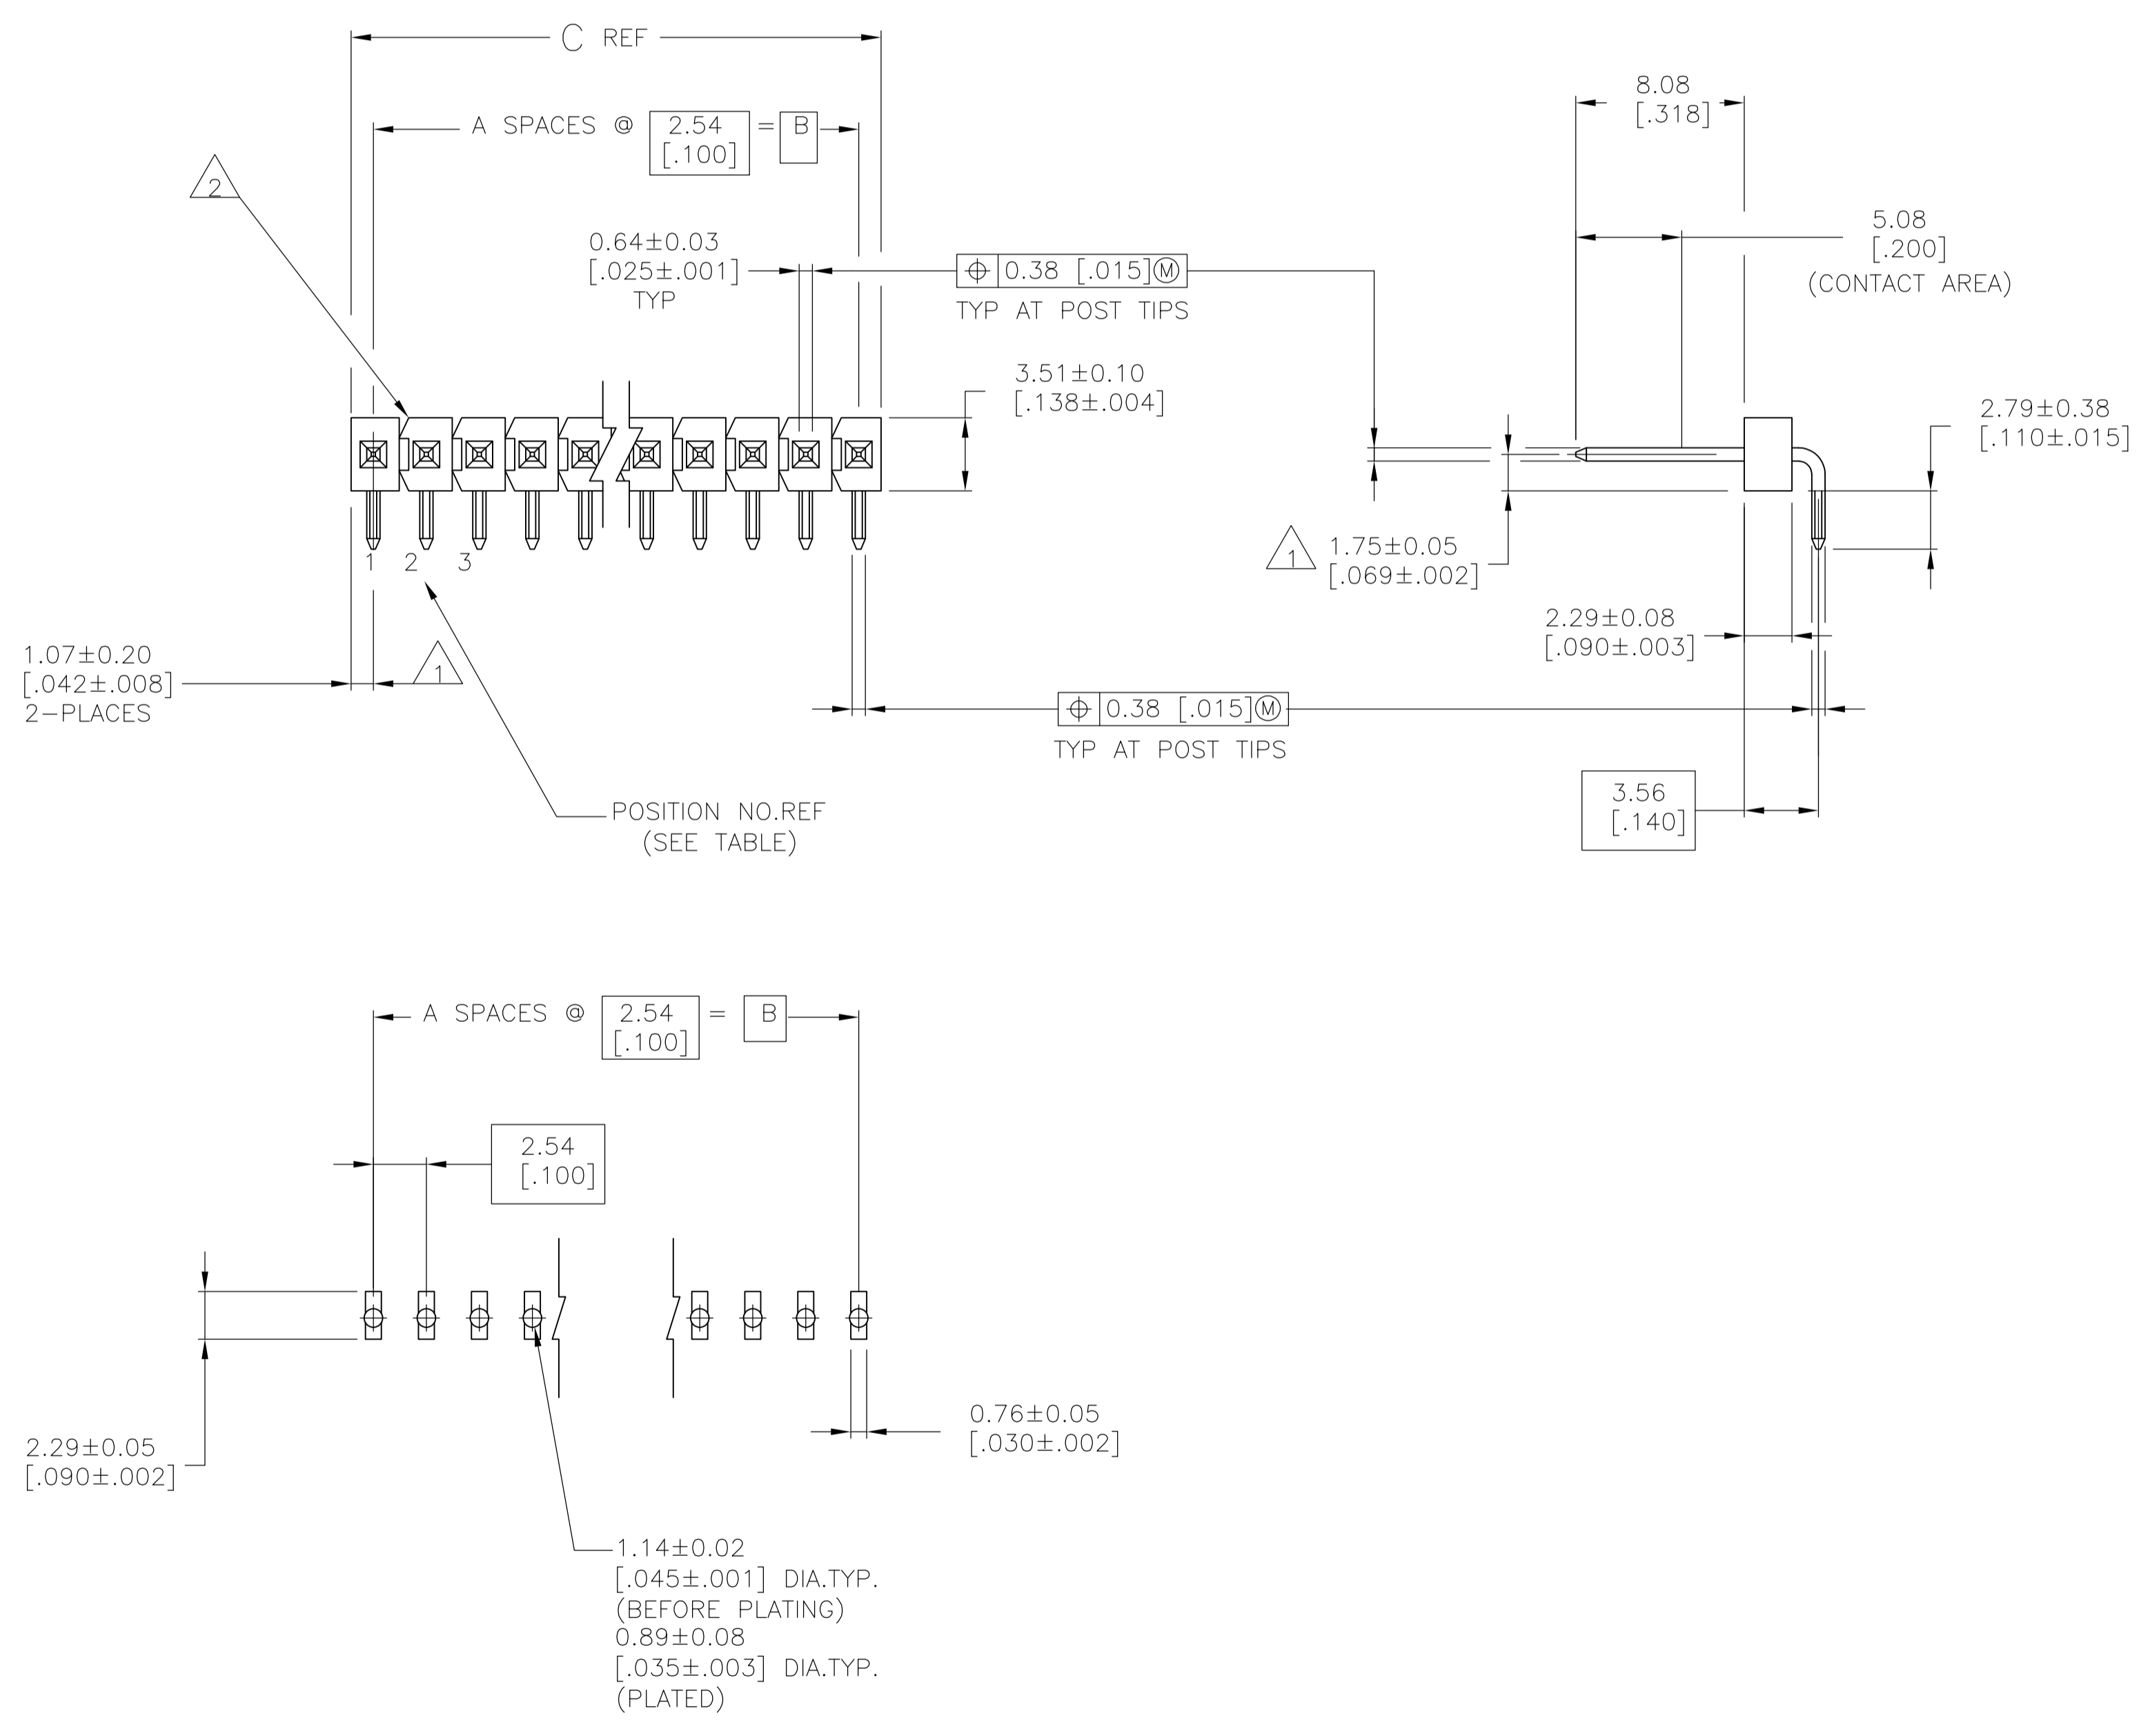

REV	DATE	BY	APPV	NO. OF POSITIONS	PART NUMBER	
3	101.19			39	40	4-146305-0
3	[3.984]			39	39	3-146305-9
3	98.65			37	38	3-146305-8
3	[3.884]			36	37	3-146305-7
3	96.11			35	36	3-146305-6
3	[3.784]			34	35	3-146305-5
3	93.98			33	34	3-146305-4
3	[3.684]			32	33	3-146305-3
3	91.44			31	32	3-146305-2
3	[3.584]			30	31	3-146305-1
3	88.90			29	30	3-146305-0
3	[3.484]			28	29	2-146305-9
3	86.36			27	28	2-146305-8
3	[3.384]			26	27	2-146305-7
3	83.82			25	26	2-146305-6
3	[3.284]			24	25	2-146305-5
3	81.28			23	24	2-146305-4
3	[3.184]			22	23	2-146305-3
3	78.74			21	22	2-146305-2
3	[3.084]			20	21	2-146305-1
3	76.20			19	20	2-146305-0
3	[2.984]			18	19	1-146305-9
3	73.66			17	18	1-146305-8
3	[2.884]			16	17	1-146305-7
3	71.12			15	16	1-146305-6
3	[2.784]			14	15	1-146305-5
3	68.58			13	14	1-146305-4
3	[2.684]			12	13	1-146305-3
3	66.04			11	12	1-146305-2
3	[2.584]			10	11	1-146305-1
3	63.5			9	10	1-146305-0
3	[2.484]			8	9	146305-9
3	60.96			7	8	146305-8
3	[2.384]			6	7	146305-7
3	58.42			5	6	146305-6
3	[2.284]			4	5	146305-5
3	55.88			3	4	146305-4
3	[2.184]			2	3	146305-3
3	53.34			1	2	146305-2
3	[2.084]			0	1	146305-1
3	50.80					
3	[1.984]					
3	48.26					
3	[1.884]					
3	45.72					
3	[1.784]					
3	43.18					
3	[1.684]					
3	40.64					
3	[1.584]					
3	38.10					
3	[1.484]					
3	35.56					
3	[1.384]					
3	33.02					
3	[1.284]					
3	30.48					
3	[1.184]					
3	27.94					
3	[1.084]					
3	25.40					
3	[.984]					
3	22.86					
3	[.884]					
3	20.32					
3	[.784]					
3	17.78					
3	[.684]					
3	15.24					
3	[.584]					
3	12.70					
3	[.484]					
3	10.16					
3	[.384]					
3	7.62					
3	[.284]					
3	5.08					
3	[.184]					
3	2.54					
3	[.084]					
3	[-]					


RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN I. HOFFMAN 21JUN95

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK G. DUBNICZKI	NAME
0 PL ± -	1 PL ± -	APPV G. DUBNICZKI	PRODUCT SPEC
2 PL ± 0.51[.02]	3 PL ± 0.127[.005]	APPLICATION SPEC	SIZE
4 PL ± 0.0127[.0005]	ANGLES ±	WEIGHT	CAGE CODE DRAWING NO
MATERIAL	FINISH SEE TABLE	CUSTOMER DRAWING	RESTRICTED TO

STE TE Connectivity
 HEADER ASSEMBLY, MOD II, BREAKAWAY, HIGH TEMPERATURE, RIGHT ANGLE, SINGLE ROW, W/.025 SQUARE POSTS
 A1 00779 C=146305
 SCALE 4:1 SHEET 1 OF 2 REV C

OBSOLETE	△5	101.19 [3.984]	99.06 [3.900]	39	40	9-146305-0	
	△5	98.65 [3.884]	96.52 [3.800]	38	39	8-146305-9	
	△5	96.11 [3.784]	93.98 [3.700]	37	38	8-146305-8	
	△5	93.57 [3.684]	91.44 [3.600]	36	37	8-146305-7	
	△5	91.03 [3.584]	88.90 [3.500]	35	36	8-146305-6	
	△5	88.49 [3.484]	86.36 [3.400]	34	35	8-146305-5	
	△5	85.95 [3.384]	83.82 [3.300]	33	34	8-146305-4	
	△5	83.41 [3.284]	81.28 [3.200]	32	33	8-146305-3	
	△5	80.87 [3.184]	78.74 [3.100]	31	32	8-146305-2	
	△5	78.33 [3.084]	76.20 [3.000]	30	31	8-146305-1	
	△5	75.79 [2.984]	73.66 [2.900]	29	30	8-146305-0	
	△5	73.25 [2.884]	71.12 [2.800]	28	29	7-146305-9	
	△5	70.71 [2.784]	68.58 [2.700]	27	28	7-146305-8	
	△5	68.17 [2.684]	66.04 [2.600]	26	27	7-146305-7	
	△5	65.63 [2.584]	63.5 [2.500]	25	26	7-146305-6	
	△5	63.09 [2.484]	60.96 [2.400]	24	25	7-146305-5	
	△5	60.55 [2.384]	58.42 [2.300]	23	24	7-146305-4	
	△5	58.01 [2.284]	55.88 [2.200]	22	23	7-146305-3	
	△5	55.47 [2.184]	53.34 [2.100]	21	22	7-146305-2	
	△5	52.93 [2.084]	50.80 [2.000]	20	21	7-146305-1	
	△5	50.39 [1.984]	48.26 [1.900]	19	20	7-146305-0	
	△5	47.85 [1.884]	45.72 [1.800]	18	19	6-146305-9	
	△5	45.31 [1.784]	43.18 [1.700]	17	18	6-146305-8	
	△5	42.77 [1.684]	40.64 [1.600]	16	17	6-146305-7	
	△5	40.23 [1.584]	38.10 [1.500]	15	16	6-146305-6	
	△5	37.69 [1.484]	35.56 [1.400]	14	15	6-146305-5	
	△5	35.15 [1.384]	33.02 [1.300]	13	14	6-146305-4	
	OBSOLETE	△5	32.61 [1.284]	30.48 [1.200]	12	13	6-146305-3
		△5	30.07 [1.184]	27.94 [1.100]	11	12	6-146305-2
		△5	27.53 [1.084]	25.40 [1.000]	10	11	6-146305-1
	OBSOLETE	△5	24.99 [.984]	22.86 [.900]	9	10	6-146305-0
		△5	22.45 [.884]	20.32 [.800]	8	9	5-146305-9
		△5	19.91 [.784]	17.78 [.700]	7	8	5-146305-8
	OBSOLETE	△5	17.37 [.684]	15.24 [.600]	6	7	5-146305-7
		△5	14.83 [.584]	12.70 [.500]	5	6	5-146305-6
		△5	12.29 [.484]	10.16 [.400]	4	5	5-146305-5
	OBSOLETE	△5	9.75 [.384]	7.62 [.300]	3	4	5-146305-4
		△5	7.21 [.284]	5.08 [.200]	2	3	5-146305-3
	OBSOLETE	△5	4.67 [.184]	2.54 [.100]	1	2	5-146305-2
OBSOLETE	△5	2.13 [.084]	[-]	0	1	5-146305-1	
PLATING		C	B	A	NO. OF POSITIONS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN I. HOFFMAN 21JUN95	 TE Connectivity
DIMENSIONS: mm [INCHES]		CHK G. DUBNICZKI	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. DUBNICZKI	NAME HEADER ASSEMBLY, MOD II, BREAKAWAY, HIGH TEMPERATURE, RIGHT ANGLE, SINGLE ROW, W/.025 SQUARE POSTS
0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.12[.005] 4 PLC ± 0.012[.0005] ANGLES ±		APPLICATION SPEC	RESTRICTED TO
MATERIAL △4	FINISH SEE TABLE	WEIGHT -	SIZE A1
CUSTOMER DRAWING		DRAWING NO. 00779	SCALE 1:1
		REV C	SHEET 2 OF 2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)