


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
C		REVISED PER ECO-18-008015	24MAY2018	AP GD

RECOMMENDED PCB LAYOUT
 TOLERANCE IS ±0.05

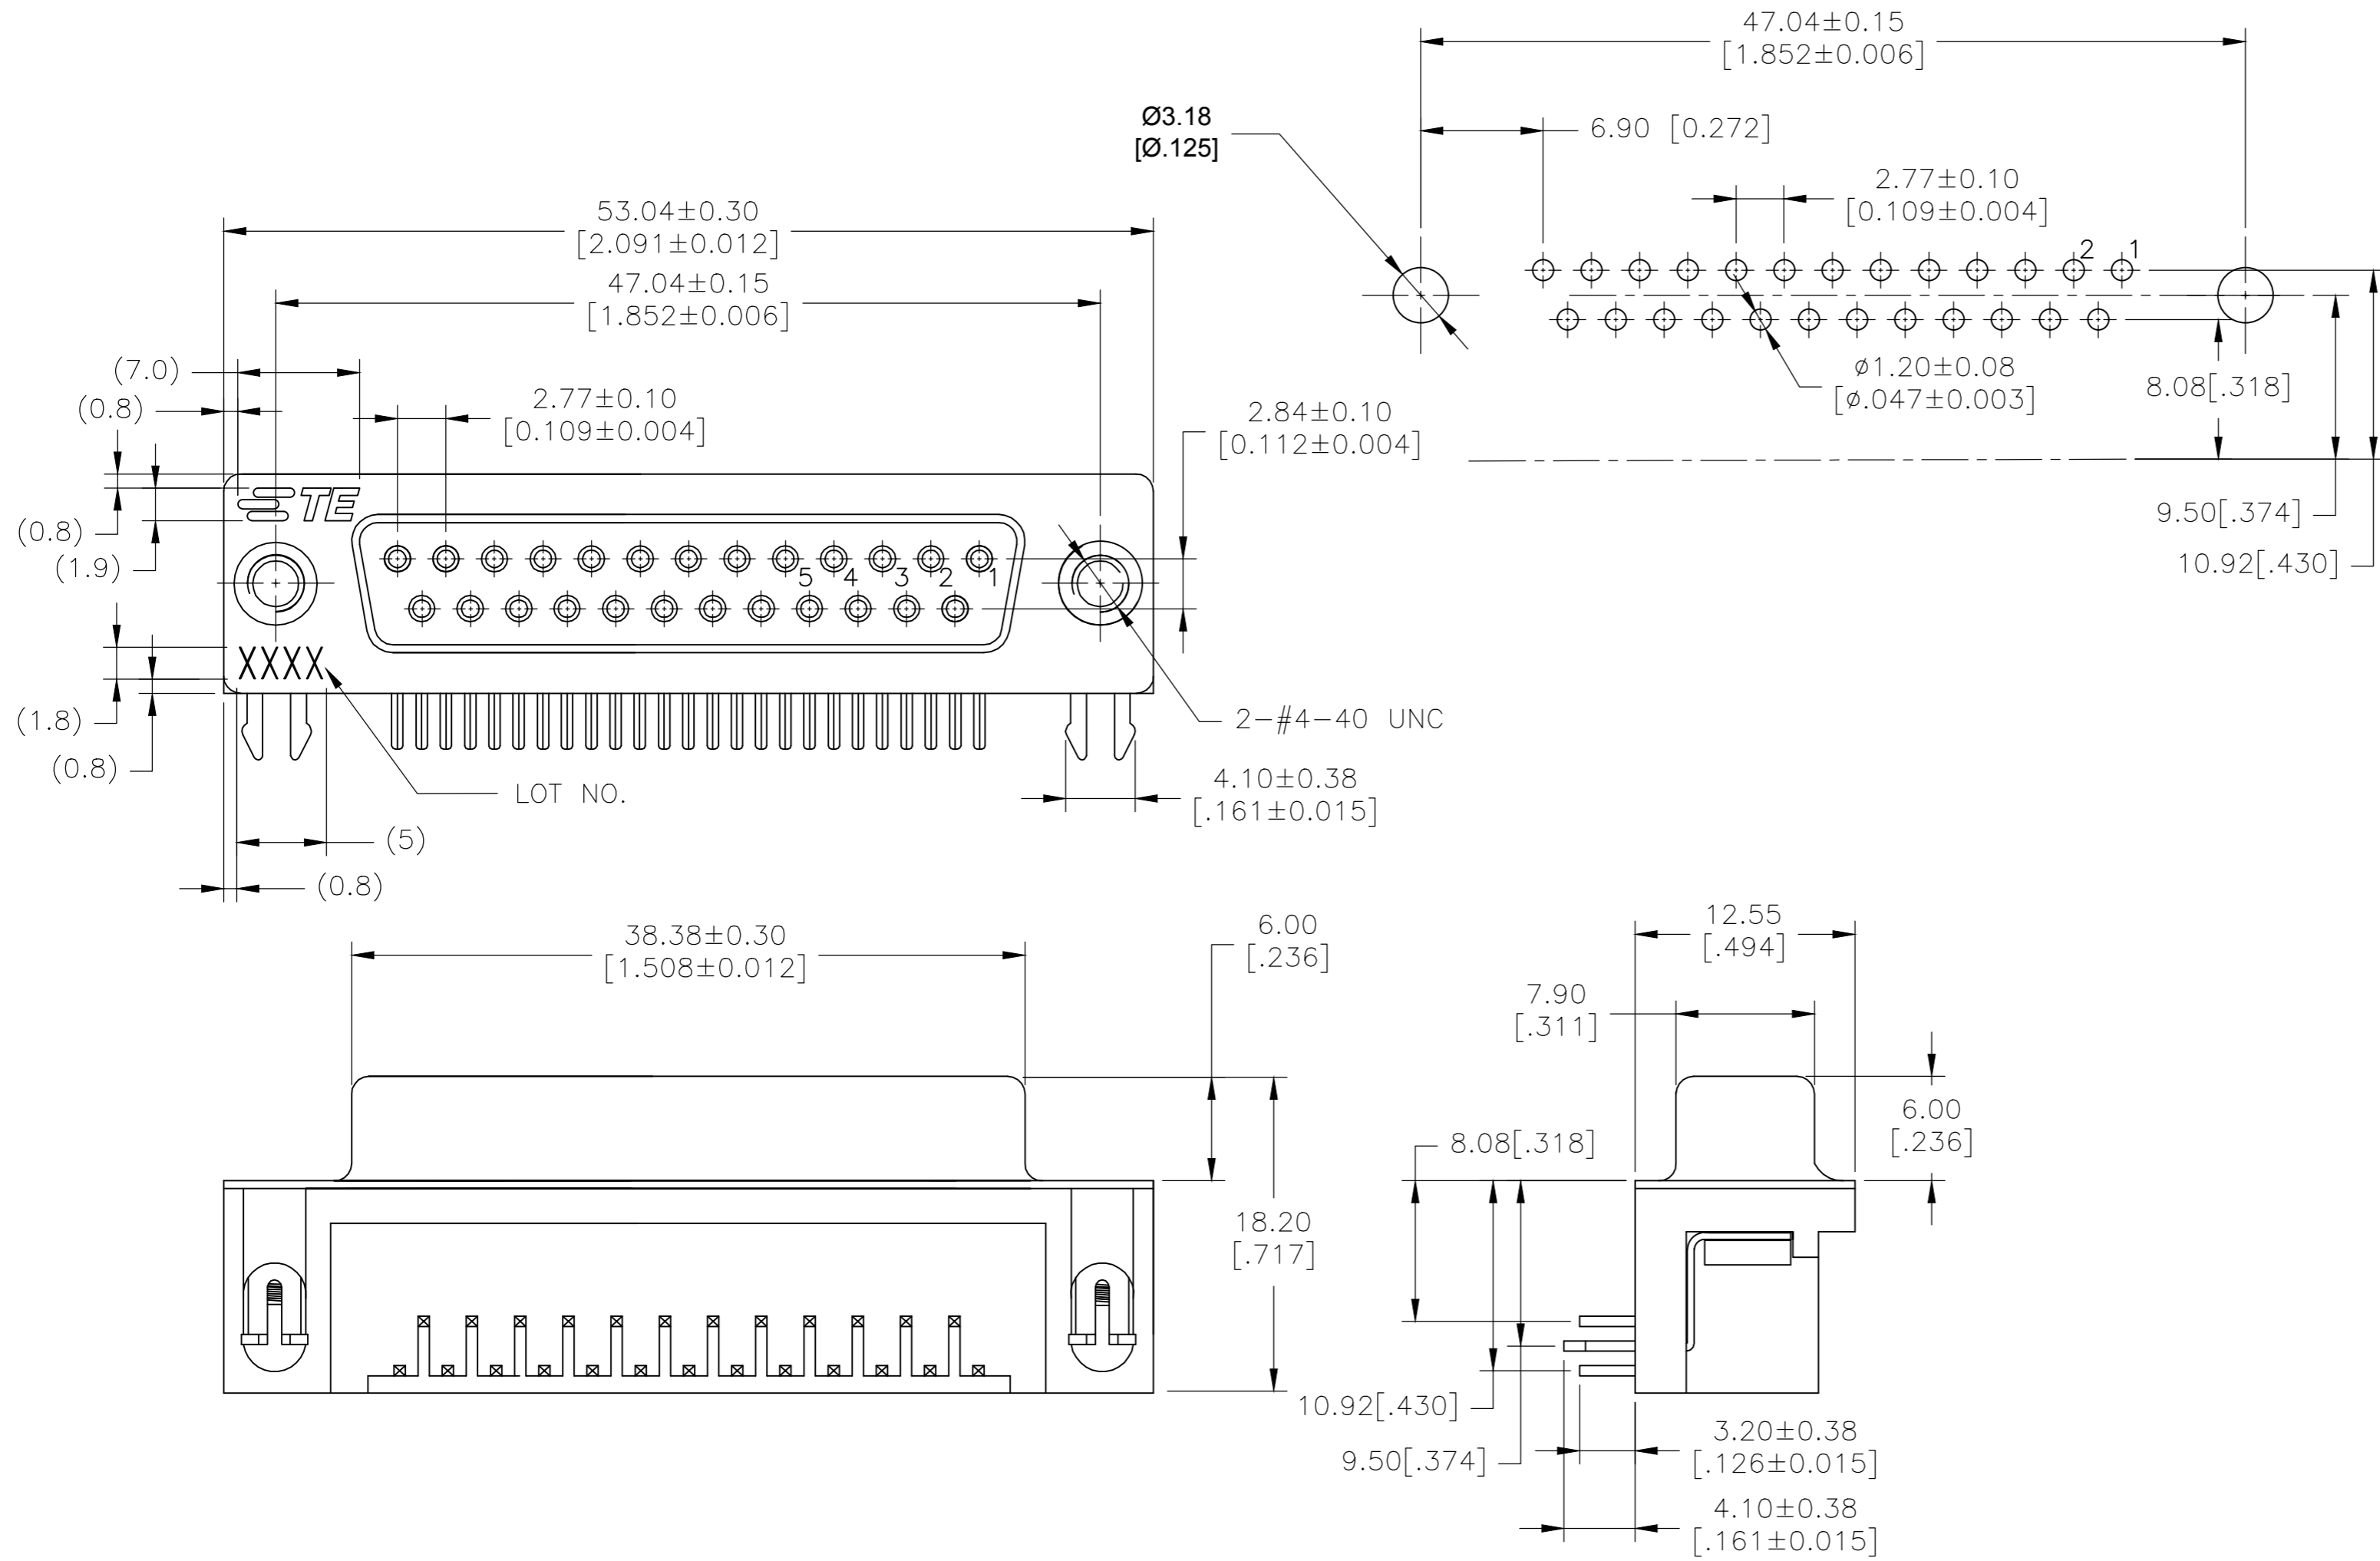

- NOTES:
- HOUSING: PBT+GF(UL94V-0) BLACK
 - CONTACT: PHOSPHOR BRONZE
 - " GOLD PLATING ON CONTACT AREA
 - 100u" MATTE TIN PLATING ON SOLDER TAIL
 - 50u" NICKEL UNDERPLATED OVERALL
 - HOLDDOWN: BRASS, 100u" TIN OVER 50u" NICKEL
 - SHELL: SPCC, NICKEL PLATING OVERALL
 - RIVET LOCK: BRASS, NICKEL PLATING OVERALL

LOT NUMBER "XXXX"
 STANDS FOR CALENDAR YEAR
 STANDS FOR WEEK NUMBER

THREADED	Au Flash	2311762-1
TYPE	Contact Area Plating	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 21FEB2017	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK GORENC, DANIEL L. 21FEB2017	NAME AMPLIMITE RECEPTACLE, HD20, RIGHT ANGLE, 25P THREADED	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GORENC, DANIEL L. 21FEB2017	PRODUCT SPEC 108-130023	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± 0.40		SIZE A2		
2 PLC ± 0.25		CAGE CODE 00779		
3 PLC ± 0.15		DRAWING NO. C=2311762		
4 PLC ± -		RESTRICTED TO		
ANGLES ± 3°		SCALE 1:1		
MATERIAL		SHEET 1 OF 1		
FINISH		REV C		
WEIGHT		CUSTOMER DRAWING		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)