			1		0
	THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION ALL RIGHTS RESERVED.	20		
D					
					—— 2.115±.016 —
С		- ( . 2		9	(1.800) EQUAL SPACES @ (
	(.173)				
	0				
	(.173) — 2X R FULL —				
В	2X R FU	LL 100 -		8	(1.600) Equal spaces @ (
A					

7


6

8


4805 (3/11)

5	1	3	
		<u> </u>	


⚠️ MATERIAL: 45±5 SHORE "A" DUROMETER SILICONE, GRAY, SELF LUBRICATING, PER TE SPEC 100-1167-3.

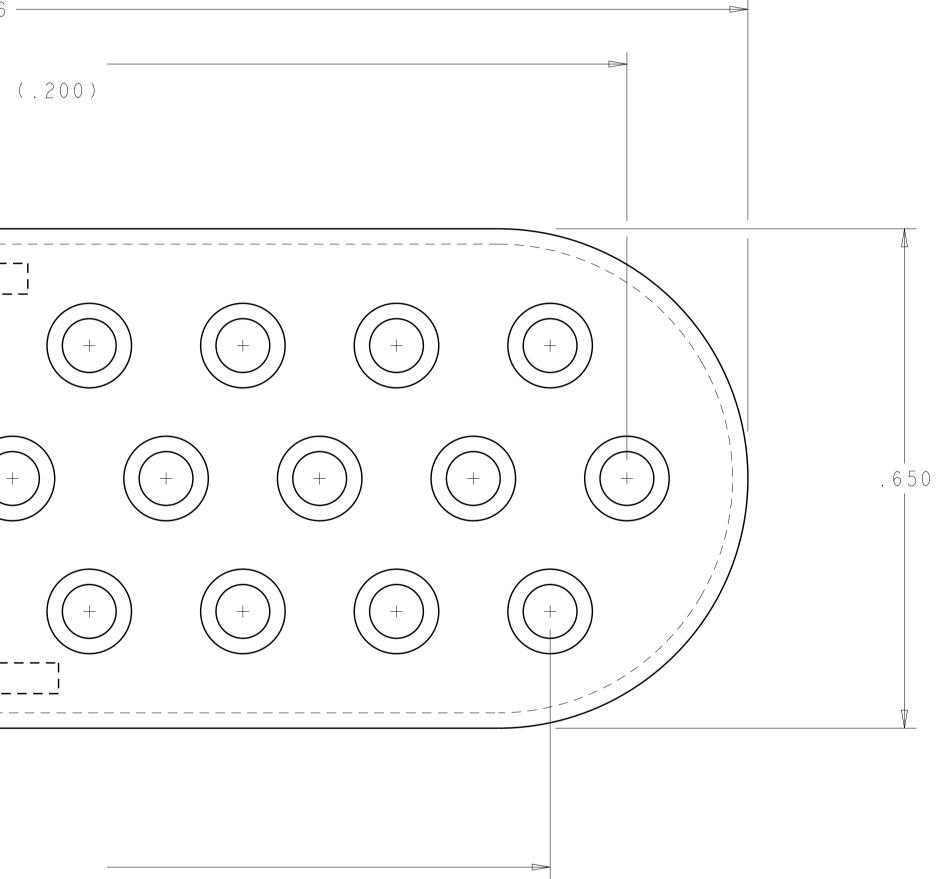

(.200)



	2				1			
гос С М	D I S T	P	LTR	REVISIONS		DATE	DWN	APVD
	I		A 1	REV PER ECO-12-015596		110CT2012	RGV	DCS

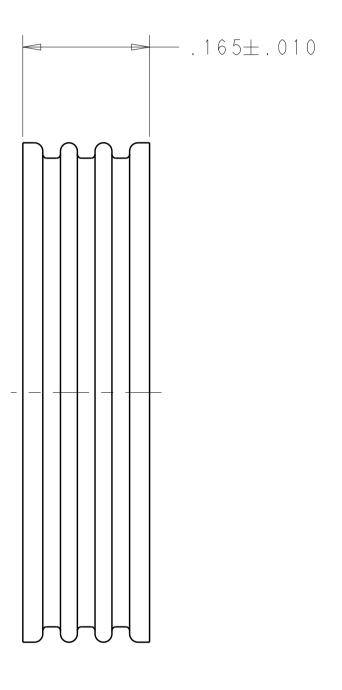

	776176-1
	PART NUMBER
	TE Connectivity
TOLERANCES UNLESS OTHERWISE SPECIFIED: D. STRAUSSEN NAME   0 PLC ±- D. STRAUSSER SEAL, WIRE,   1 PLC ±- - 28 POSITION, ECM   2 PLC ±- - -   3 PLC ±.005 APPLICATION SPEC	SC
4 PLC ±- ANGLES ±-	RESTRICTED TO
FINISH _ WEIGHT _ A 1 00779 C - 776176	-
CUSTOMER DRAWING SCALE 8:	1 SHEET OF REVAI

D

С

В

А

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)