

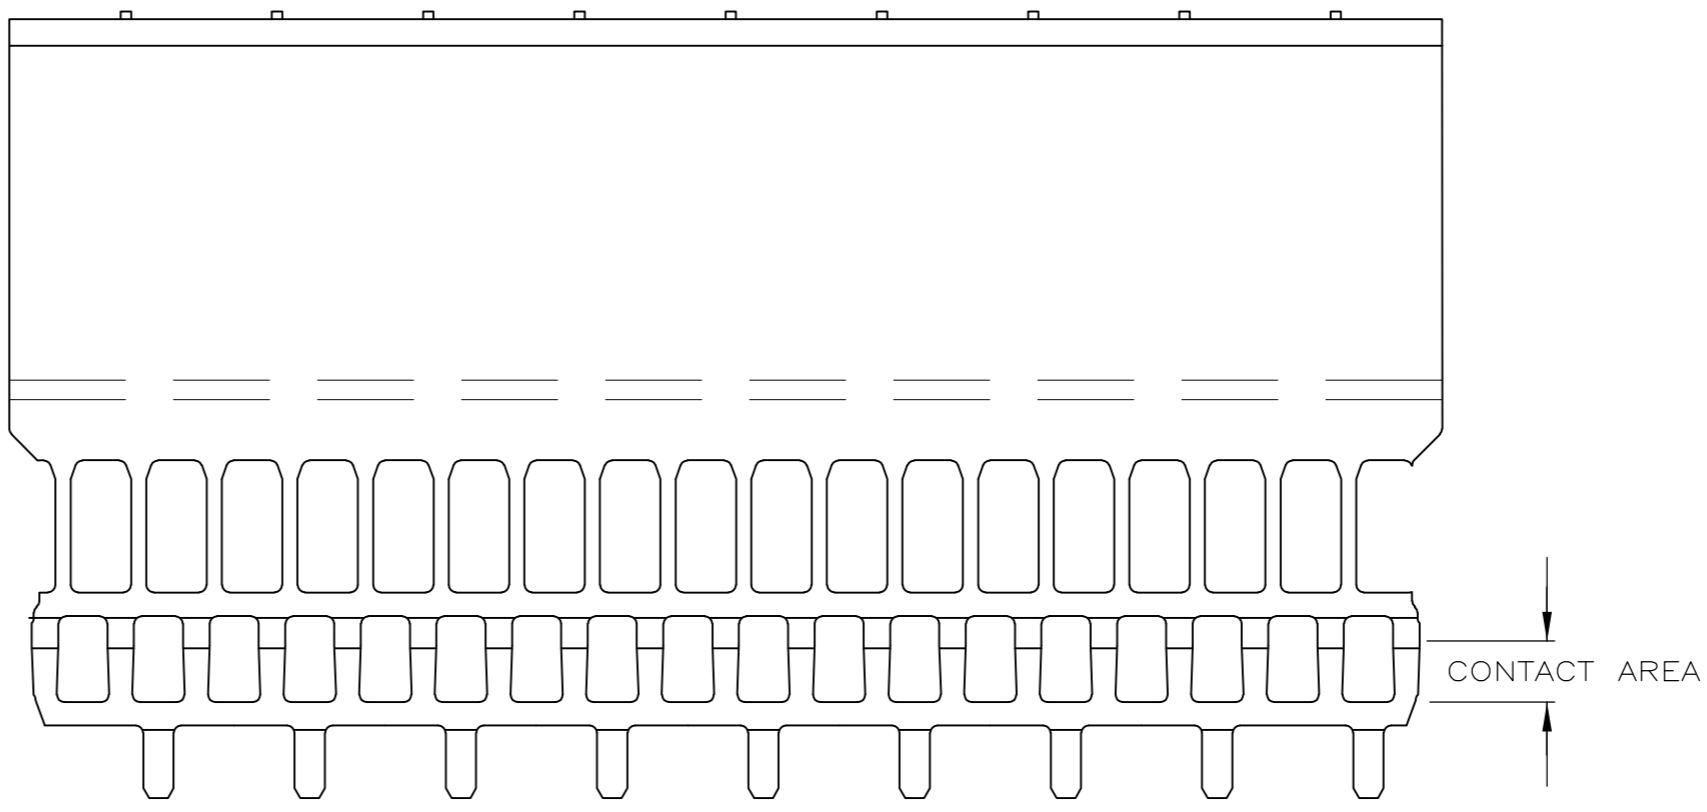
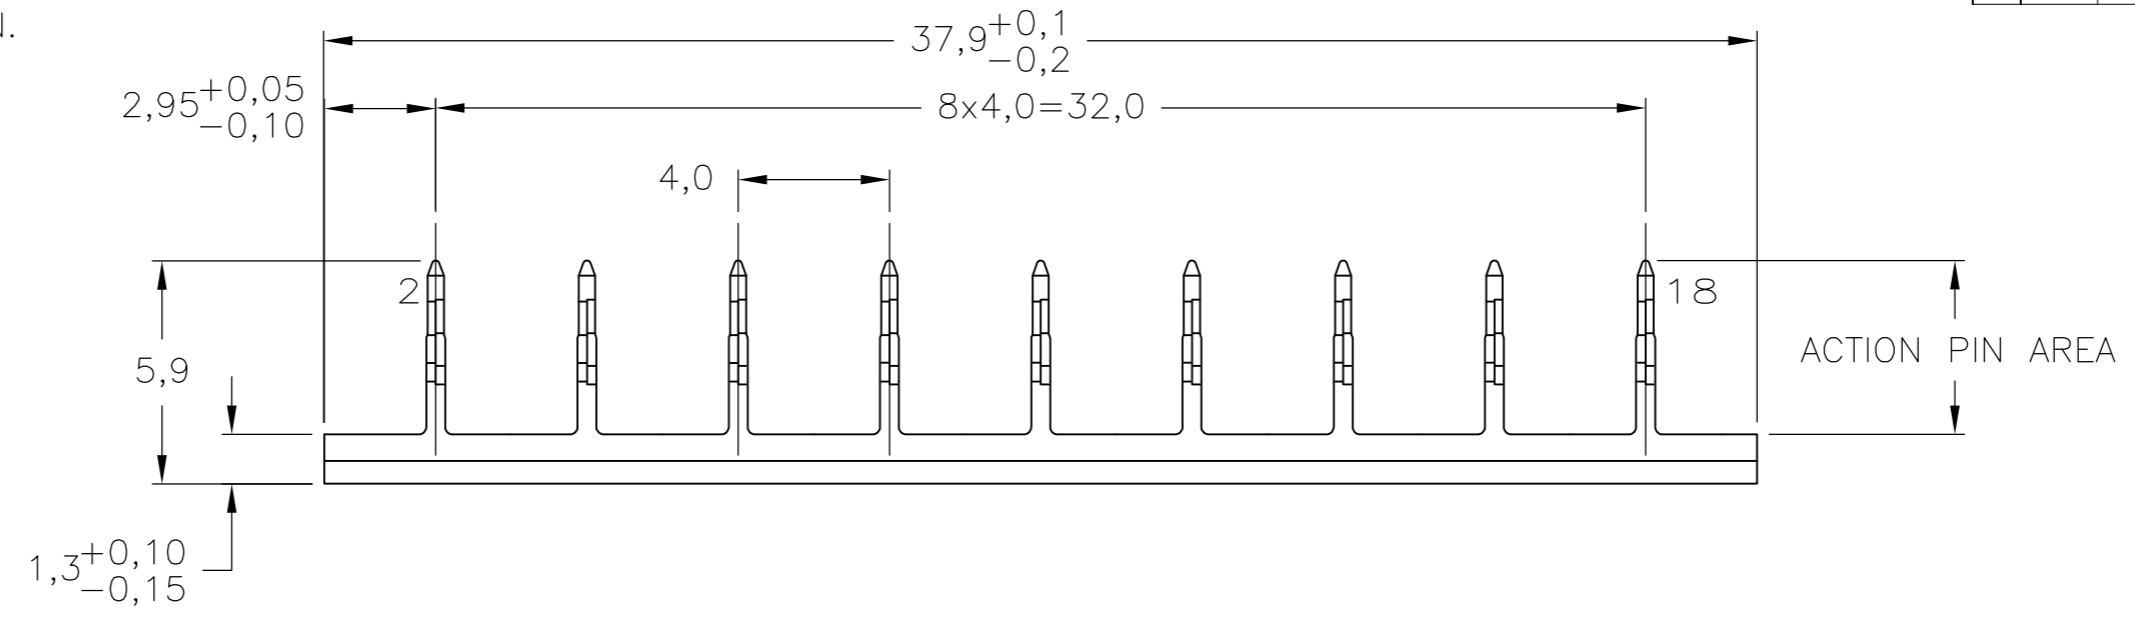


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| REVISIONS | | | | |
|-----------|-----|---------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | APVD |
| M | | ECR-16-013251 | 12JUL2017 | FL SY |

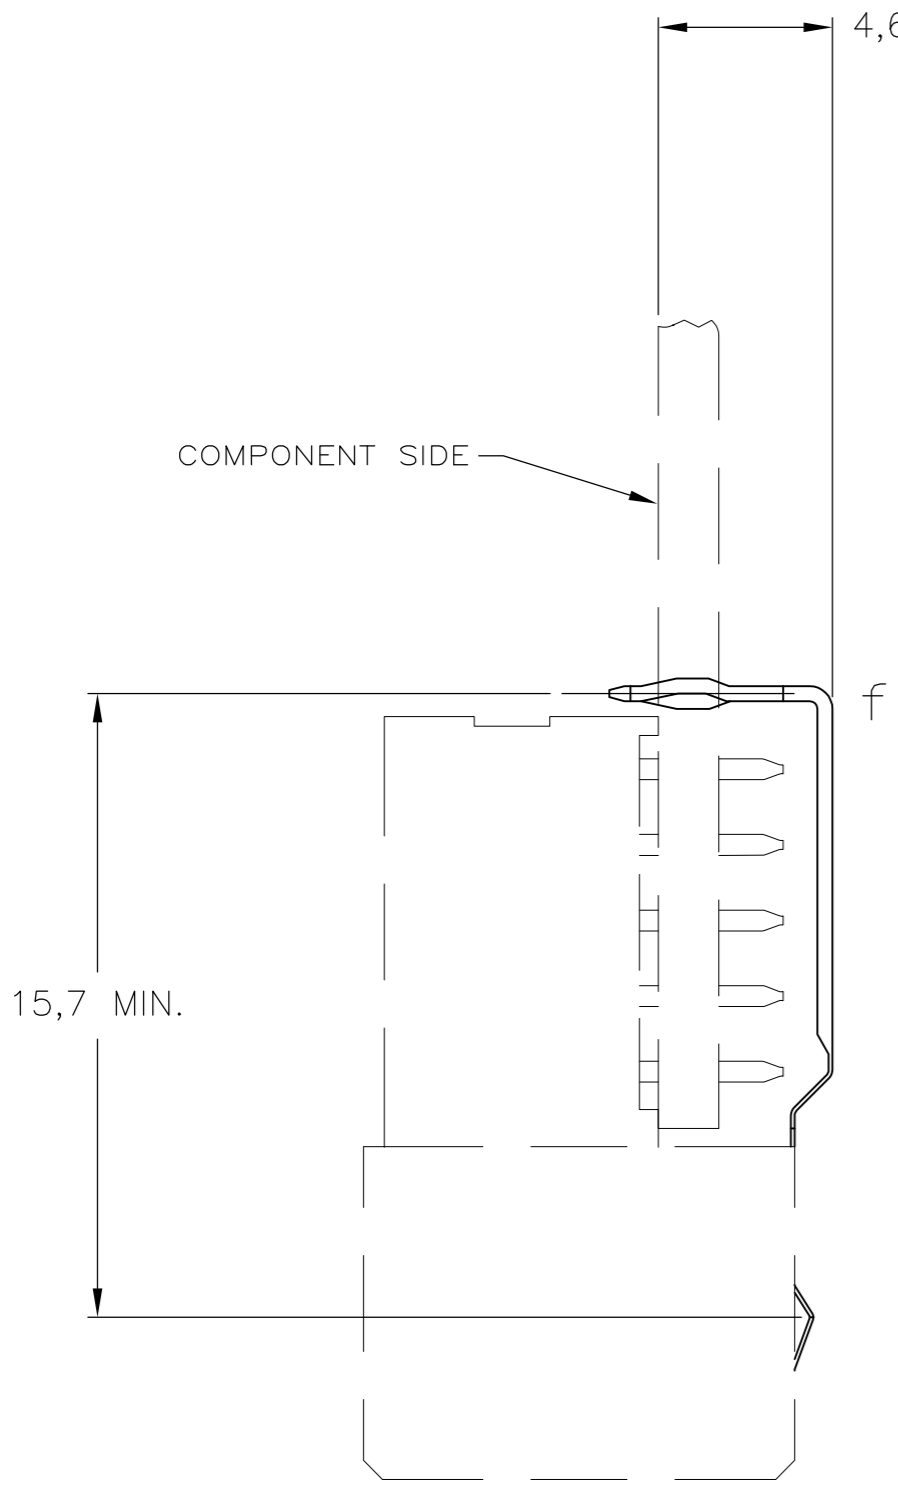

- NOTES:
- 1 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - 2 MATERIAL; PHOSPHORBRONZE.
 - 3 ROW "f" 9 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - 4 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS WITH UPPERSHIELD, 95+10 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - 5 MAX. BOARD THICKNESS 3,5 mm.
 - 6 SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 - 8 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - 9 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - 10 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - 11 0.76µm MIN GOLD PLATING AT MATING SURFACE.

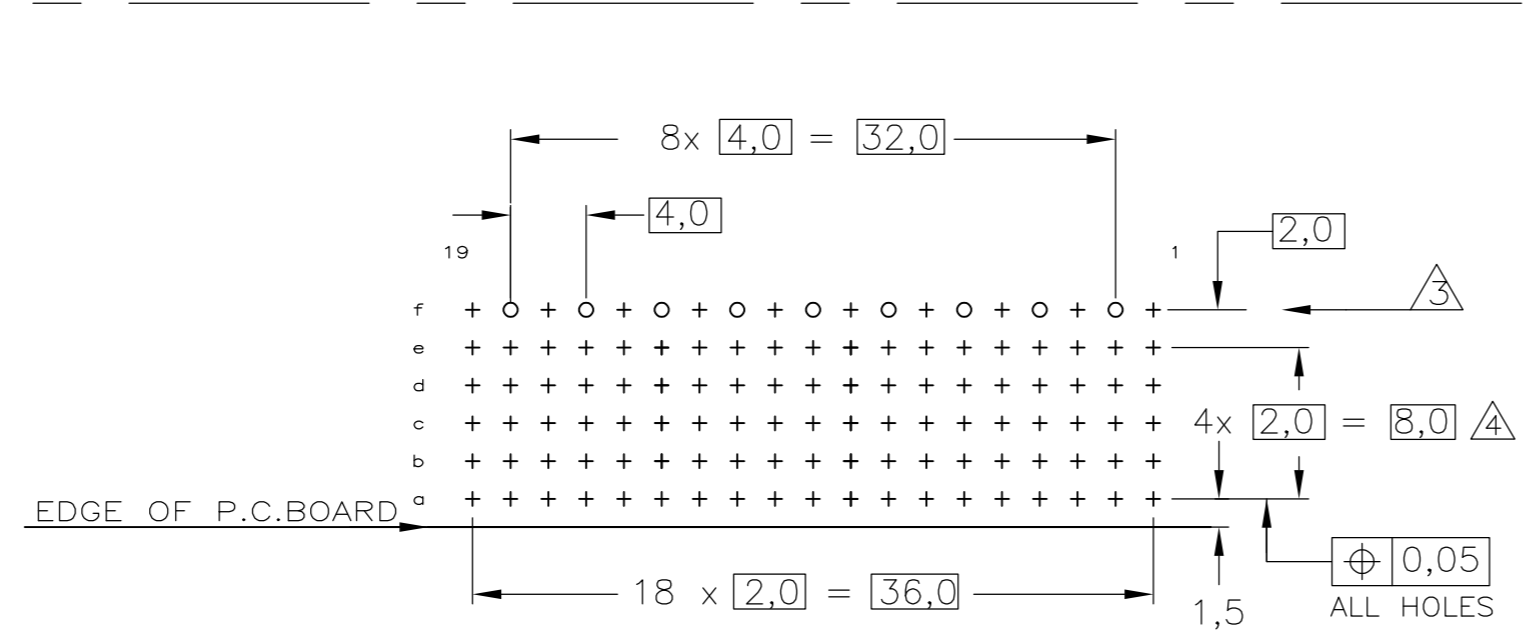

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN FOR DETAILS: SEE APPLICATION SPECIFICATION

| | | | | | |
|----------|------------|---|----|----------|------------|
| | 1 | 8 | 11 | 2 | 4-352029-0 |
| OBSELETE | 1 | 6 | 10 | 2 | 352029-9 |
| OBSELETE | 1 | 8 | | 2 | 352029-2 |
| | FINISH | | | MATERIAL | |
| | PARTNUMBER | | | | |

| | | | | |
|--|--|------------------------------------|--|--------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN W. v.d.HEIJDEN 23-APR-96 | TE Connectivity | |
| DIMENSIONS: mm | | CHK W. v.d.HEIJDEN 23-APR-96 | Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE B-19 COLUMNS | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2 | | APVD F. v.KONINGSBRUGGE | NAME | |
| 6-PLG ± | | PRODUCT SPEC | 108-19082 | |
| 1-PLG ± | | APPLICATION SPEC | 114-19029 | |
| 2-PLG ± | | WEIGHT | 0.000000 | |
| 3-PLG ± | | CUSTOMER DRAWING | | |
| 4-PLG ± | | SCALE | 5:1 | SHEET 1 of 1 |
| ANGLES ± | | FINISH | | REV M |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)