


TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME.
 USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

| LTR | | REVISIONS | DATE | APPROVED |
|-----|--|--------------------------|-----------|----------|
| B | | REVISED PER DCR# T-32180 | NOV/12/03 | M.HIGGY |

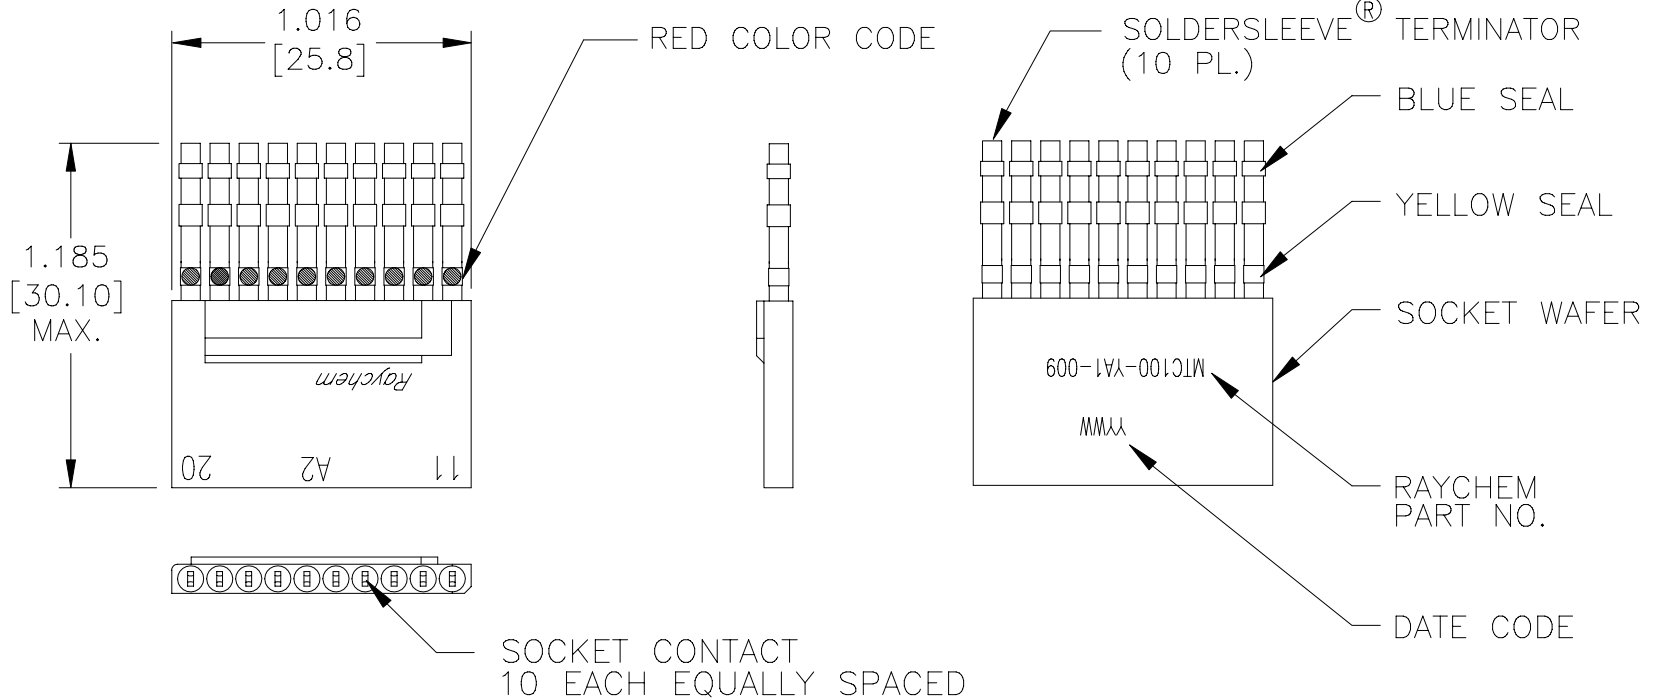

NOTES:

1. MATERIAL:

- A) SOCKET WAFER HIGH GRADE POLYARYLENE THERMOPLASTIC
- B) SOCKET CONTACT COPPER ALLOY PER ASTM-B-139
- C) SOLDERSLEEVE[®] TERMINATOR REFER TO RAYCHEM DWG. CTA-0068

2. FINISH:

- A) SOCKET WAFER FINISH TO BE MOLDED
- B) SOCKET CONTACT ENGAGING END, GOLD PLATE PER ASTM-B-488, CLASS 1
- C) CONTACT TAIL SOLDER COATED PER J-STD-006

3. WAFER: DESIGNED FOR USED WITH RAYCHEM CONNECTORS SEE SPECIFICATION C-6111

SPECIFICATION CONTROL DRAWING

| | | | | | | | | |
|---|----------|----------|------------------------|--|---|----------------|----------------|----------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ± .005 { .127 mm } .XX ± .02 { .508 mm } ANGLES .X ± WEIGHT: .054 LBS. 2.46 Grams MAX. | DRAWN | ZS.ORBAN | NOV/11/03 | tyco Electronics | TYCO ELECTRONICS 300 Constitution Drive Menlo Park, CA. 94025 USA | Raychem | | |
| | CHECKED | | | | | | | |
| | APPROVED | | | TITLE WAFER "A2" SOCKET, SPECIAL 1" FOR USE IN MTC100 2" CONNECTOR, 125°C OPERATING TEMP. FOR 20-26 AWG ROUND WIRE TERMINATION, OVAL ENTRY, MTC100 SERIES (P.A.S.S.) | | | | |
| | APPROVED | M.HIGGY | NOV/11/03 | CAD NAME | T-32180.DWG | SIZE | CAGE CODE: | DWG. NO. |
| | | | THIRD ANGLE PROJECTION | | C | 06090 | MTC100-YA1-009 | B |
| | | | | | DO NOT SCALE THIS DRAWING | | SHEET 1 OF 1 | |

If this document is printed it becomes uncontrolled.
 Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)