

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN , 2006.

© COPYRIGHT 2006 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		ECO-15-004340	30APR2015	RZ	MC

NOTES:

- 1 SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115
- 2 TRAY PACKAGED
- 3 Ag PLATING
- 4 THIS ITEM MUST BE WHITE

5 ELECTRICAL CHARACTERISTICS



FREQUENCY RANGE: DC - 500 MHz  
 NOMINAL IMPEDANCE: Non Constant  
 INSULATION RESISTANCE: 5000 MOhm  
 WORKING VOLTAGE: 500 Volts RMS at Sea Level  
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max  
 CONTACT RESISTANCE:  
 CENTER CONTACT: 3.00 mOhm Max  
 OUTER CONTACT: 2.00 mOhm Max

6 MECHANICAL CHARACTERISTICS

COUPLING NUT RETENTION FORCE: 445N Min  
 CLAMP NUT RECOMMENDED TORQUE: 4 Nm  
 CABLE RETENTION FORCE: 128N Min  
 DURABILITY: 500 Cycles Min

7 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

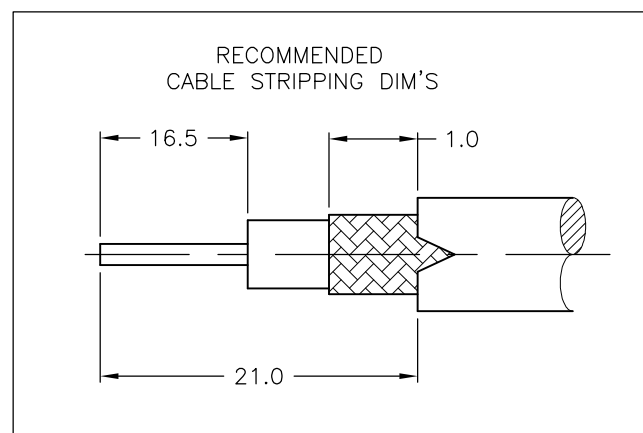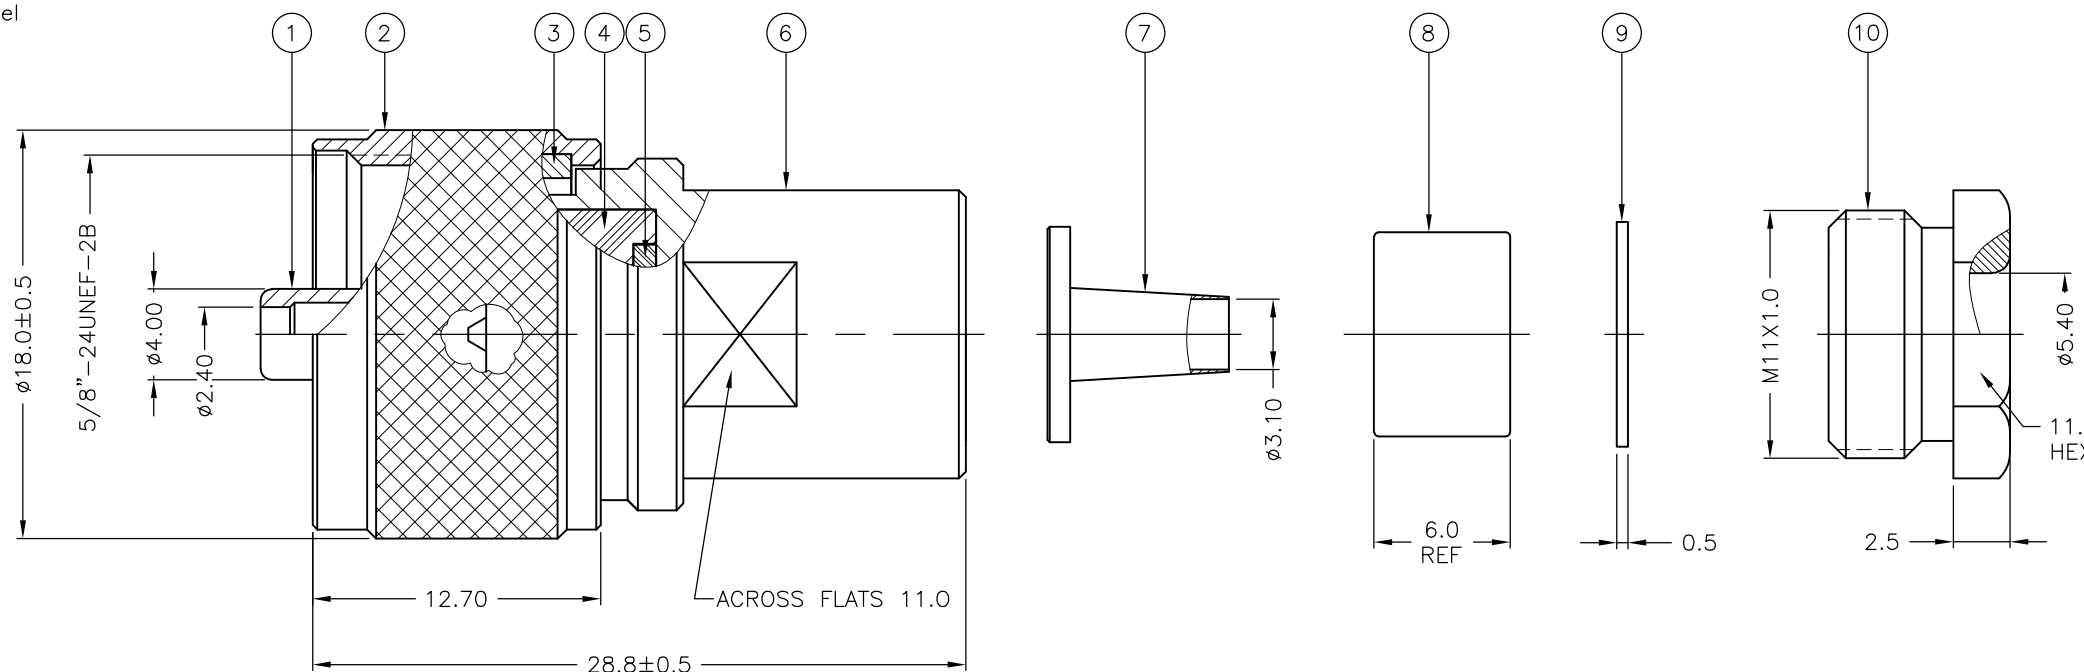

QTY	QTY PER ASSY	QTY PER ASSY	MATERIAL	DESCRIPTION	ITEM
1	1		BRASS	CLAMP NUT	10
1	1		BRASS	WASHER	9
1	1		SILICON RUBBER	GASKET	8
1	1		BRASS	FERRULE	7
1	1		BRASS	BODY	6
1	1		PTFE	INSULATION	5
1	1		PTFE	INSULATION	4
1	1		PHOSPHOR BRONZE	CIRCLIP	3
1	1		BRASS	COUPLING NUT	2
1	1		BRASS	CONTACT	1
6--0	1--0				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J.SANDWELL 09JAN06  
 CHK S.PARLOW 09JAN06  
 APVD F.WHEELER-KING 09JAN06

**STE** TE Connectivity

NAME: UHF STRAIGHT PLUG SOLDER  
 RG58C/U, 141A/U, URM43, 76, KX15

PRODUCT SPEC: -  
 APPLICATION SPEC: 411-3255

MATERIAL: SEE TABLE  
 FINISH: -

SIZE: A3  
 CAGE CODE: 00779  
 DRAWING NO: C-1337473

RESTRICTED TO: -

CUSTOMER DRAWING SCALE: NTS SHEET: 1 OF 1 REV: D

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)