


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	C	ECR-14-011637	22AUG2014	HZ RZ

- 1. MAXIMUM INSERTION LOSS IS 0.2 dB PLUS CABLE ATTENUATION OF 1.5dB/km at 1300nm (SEE TABLE)
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702

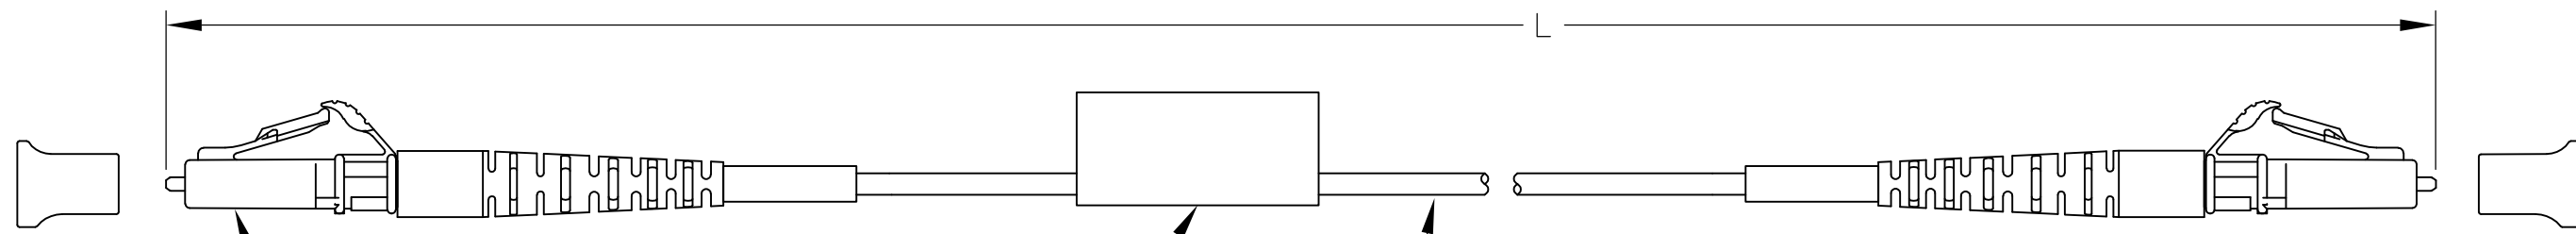

LC CONNECTOR  
2 PLACES

TRACE LABEL

CABLE, 62.5/125um,  
2.0mm JACKET

MAX IL (dB)	L METERS [INCHES]	PART NUMBER
0.25	33.00±0.33 [1299.21±12.99]	3-6374109-3
0.24	26.00±0.30 [1023.62±12.0]	2-6374109-6
0.22	10.00±0.15 [393.70±6.0]	1-6374109-0
0.20	1.63±0.05 [64.0±2.0]	6374109-9
0.20	0.488±0.04 [19.2±1.6]	6374109-8
0.20	0.355±0.04 [14.0±1.6]	6374109-7
0.20	1.40±0.05 [55.12±2.00]	6374109-6
0.21	5.00±0.05 [196.85±2.00]	6374109-5
0.21	4.00±0.08 [157.50±3.00]	6374109-4
0.20	3.00±0.05 [118.11±2.00]	6374109-3
0.20	2.00±0.05 [78.74±2.00]	6374109-2
0.20	1.00±0.05 [39.37±2.00]	6374109-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 02 SEP 05	<b>STE</b> TE Connectivity	
DIMENSIONS: mm		CHK J.DUNCAN 02 SEP 05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 02 SEP 05	NAME CABLE ASSEMBLY, FIBER OPTIC, 62.5/125um, 2.0mm CABLE, LC TO LC	
0 PLC ± -		PRODUCT SPEC	APPLICATION SPEC	
1 PLC ± -		SIZE A3		
2 PLC ± -		CAGE CODE 00779		
3 PLC ± -		DRAWING NO C-6374109		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		WEIGHT		
FINISH		SCALE NTS		
MATERIAL		SHEET 1 OF 1		
		REV C		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)