


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AJ	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER EC 0514-0098-05	04MAY2006	KS	KW

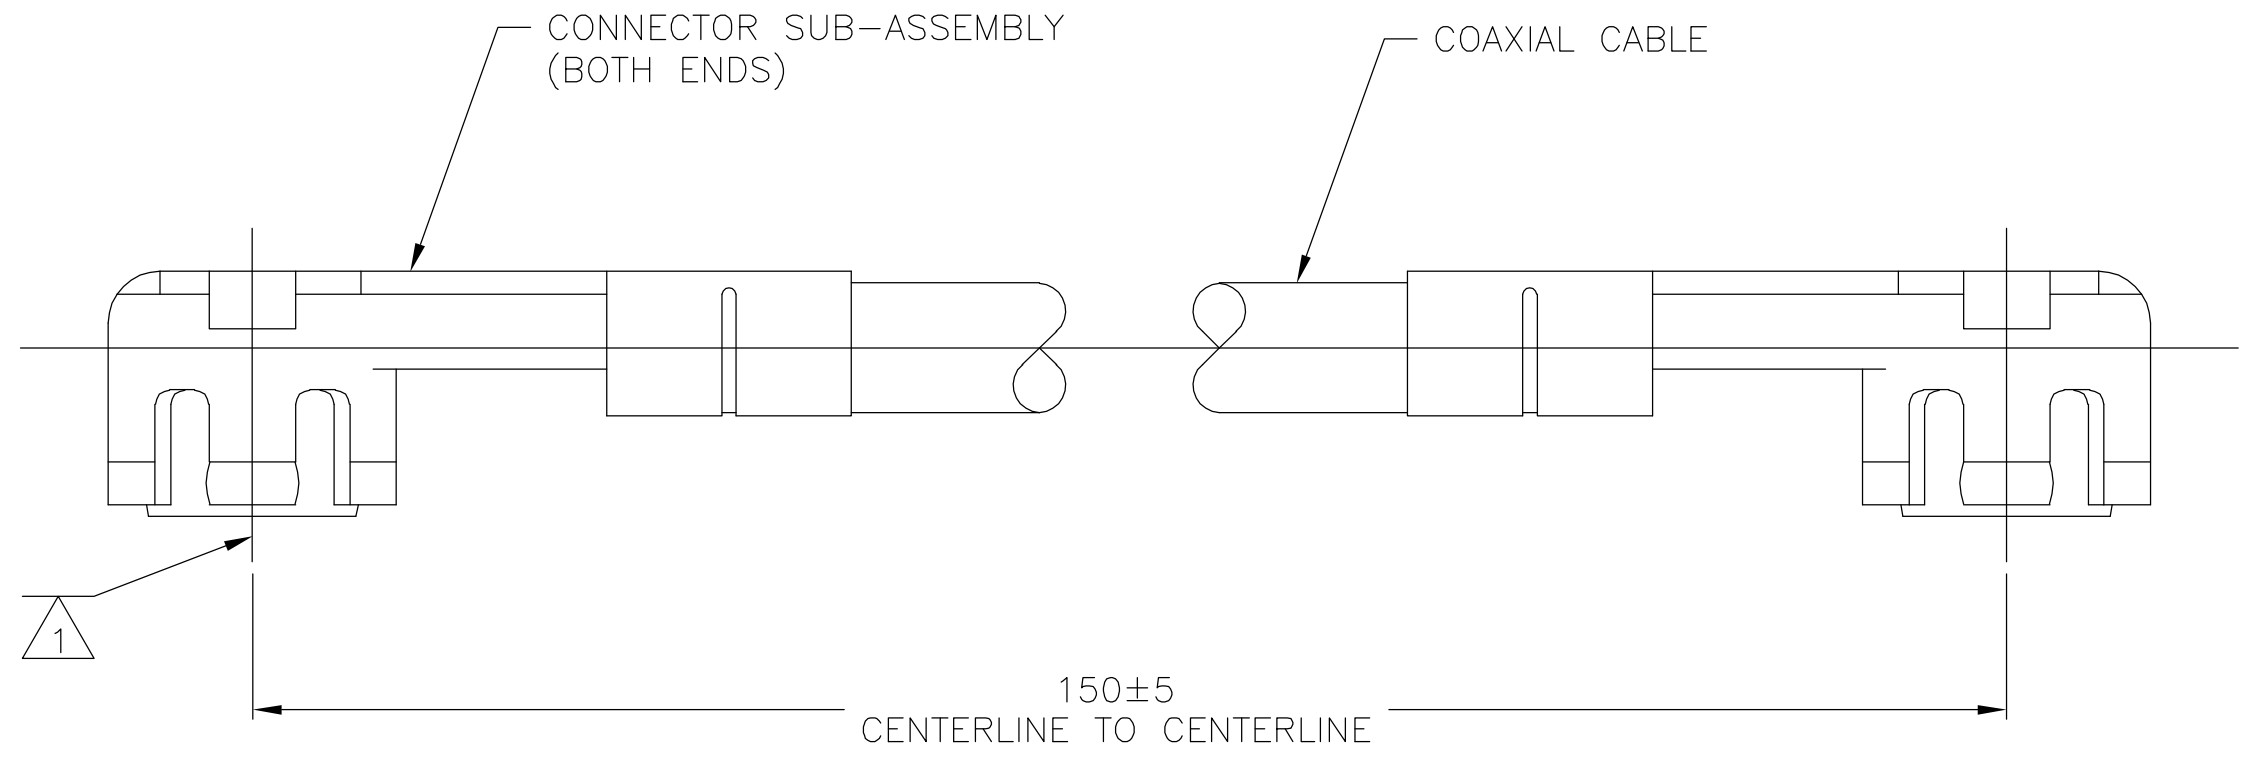

1081829-1
PART NUMBER

ELECTRICAL	FREQUENCY NOMINAL IMPEDENCE VOLTAGE RATING VSWR (MATED CONNECTORS ONLY) INSULATION RESISTANCE DIELECTRIC WITHSTANDING VOLTAGE	DC - 6 GHz 50 OHMS 250 VOLTS (VRMS MAX) @ SEA LEVEL 1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz 1,000 MEGOHMS MIN @ 250VDC 500 VOLTS (VRMS MIN) @ SEA LEVEL
MECHANICAL	CONNECTOR DURABILITY	100 MATING CYCLES
ENVIRONMENTAL	TEMPERATURE RATING	-40°C(-40°F) TO +125°C(257°F)

SSMT CONNECTOR		
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE		
JACKET	FLUORINATED ETHYLENE PROPYLENE (FEP)	N/A
SHIELD	COPPER WIRE, 44 AWG	SILVER PLATE
DIELECTRIC	POLYTETRAFLUOROETHYLENE (PTFE)	N/A
CENTER CONDUCTOR	COPPER CLAD STEEL, 30 AWG	SILVER PLATE
COMPONENT	MATERIAL	FINISH

PRODUCT SPEC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 04MAY2006	 Tyco Electronics Corporation Harrisburg, PA 17105-3608
		CHK KE WEIDNER 04MAY2006	
		APVD KE WEIDNER 04MAY2006	
		PRODUCT SPEC	
NAME			SSMT RIGHT ANGLE JACK TO JACK CABLE ASSEMBLY
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 4 PLC ± - ANGLES ± 1°	A2 00779 C=1081829
MATERIAL		FINISH	SCALE 15:1 SHEET 1 OF 1 REV B
		WEIGHT	CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)