

CABLE BREAKOUT BOOTS, TWO ENTRY

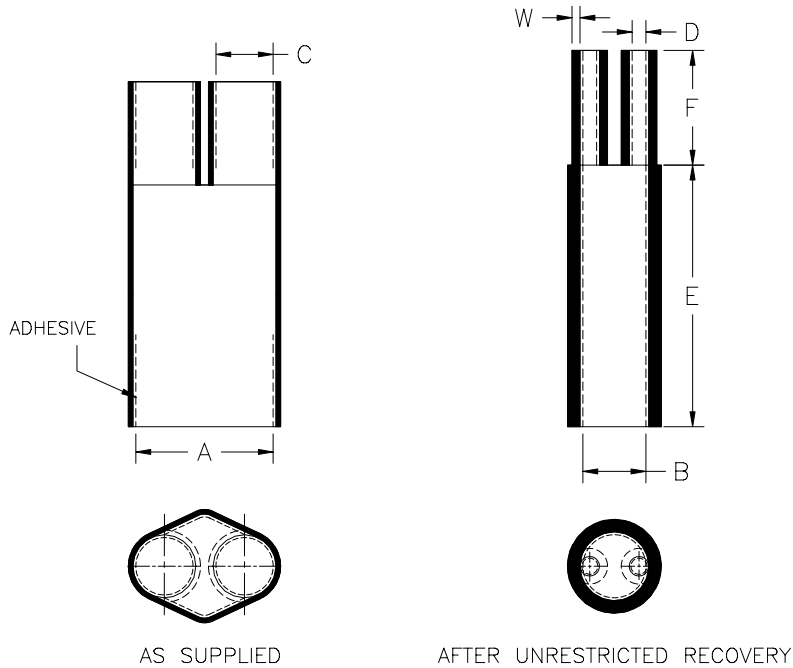


Table of Dimensions, inch (mm):

PART NUMBER (See Note*)	Body ID		Leg ID		Rec'd. Length Min		Rec'd. Wall Ref. (W)
	Exp. (A), Min	Rec'd. (B), Max	Exp. (C), Min	Rec'd. (D), Max	(E), Body	(F), Leg	
D3-9FR	0.80 (20)	0.37 (9)	0.33 (8)	0.11 (3)	2.0 (51)	0.7 (18)	0.05 (1.3)
D14-30FR	1.20 (30)	0.60 (15)	0.50 (13)	0.17 (4)	2.5 (64)	1.0 (25)	0.07 (1.8)
D50-100FR	1.90 (48)	0.90 (23)	0.75 (19)	0.30 (8)	3.0 (76)	1.2 (30)	0.10 (2.5)
D50-200FR	2.50 (63)	0.90 (23)	0.75 (19)	0.30 (8)	3.0 (76)	1.2 (30)	0.10 (2.5)
D200-400FR	3.00 (76)	1.50 (38)	1.45 (37)	0.50 (13)	3.5 (89)	1.5 (38)	0.12 (3.0)

Note*: Add "NA" to the end of Part Number if no adhesive is required

Material: Heat shrinkable boot material in accordance with -3 polyolefin

Factory applied sealant: Factory applied hot melt adhesive is standard.

<p>Raychem Products, North America Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA</p>		Product Brand:		Raychem			
Specification Control Drawing		Title:				CABLE BREAKOUT BOOT, TWO ENTRY	
		Size A	Cage Code 06090	Document No.		DXXX-XXXFR	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Rev.:	Rev. Date:		
				A	March 10, 2003		
Drawn By: A.Ng	Org. Date: 03/10/2003	Original file:		File :	Scale:	Sheet:	
				R030128.doc	None	1 of 1	

Print Date: 14-Mar-03 If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)