




CUSTOMER DRAWING

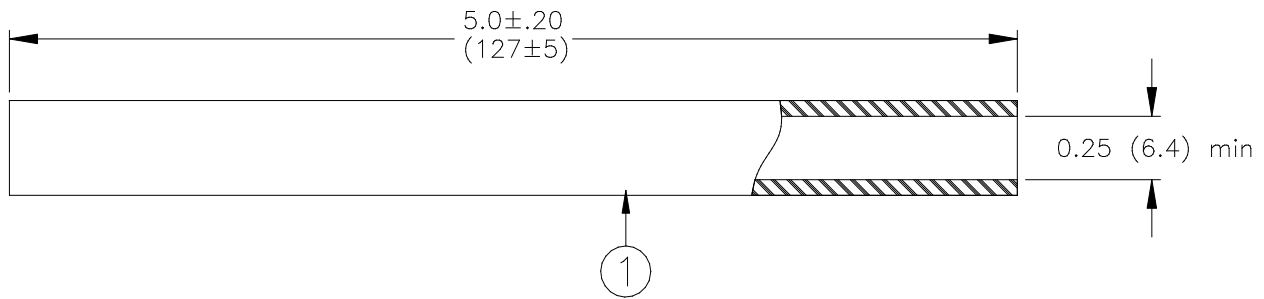


1) SEALING/STRAIN RELIEF SLEEVE

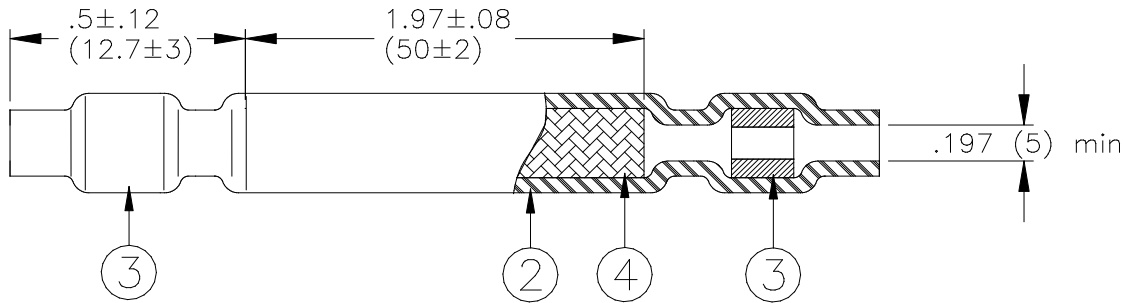

2) SHIELD SPLICE SLEEVE

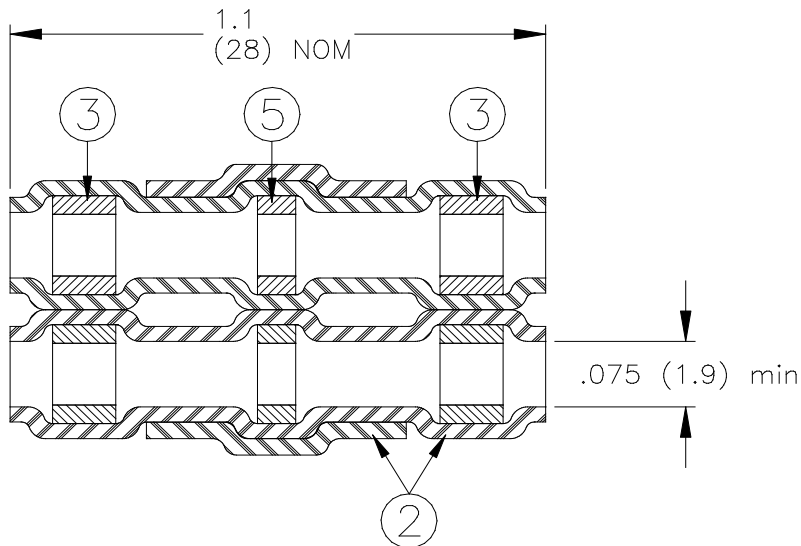

3) CONDUCTOR SPLICE ASSEMBLY

		Raychem THERMOFIT DEVICES		TITLE: SOLDERSHIELD* SPLICE KIT SINGLE SHIELDED DATABUS CABLE SOLDERSLEEVE* PRIMARY SPLICE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-150-0124		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: 2	DATE: 16-Apr-2020	
PREPARED BY: R. MAPALO	CAGE CODE: 06090	ECO: ECO-20-005255	SCALE: NTS	SIZE: A	SHEET: 1 of 2	

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raychem Downloaded From Oneyac.com trademarks

CUSTOMER DRAWING

MATERIAL

1. Heat shrinkable, radiation cross-linked polyolefin with a hot-melt adhesive liner. Color: black.
2. INSULATION SLEEVE: Heat shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
3. MELTABLE RINGS: Fluorocarbon-based thermoplastic.
4. SHIELD: Solder-impregnated, flux-coated copper braid.
SOLDER: Sn63 per ANSI J-STD-006.
FLUX: ROM1 per ANS J-STD-004.
5. SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:
SOLDER: Sn63 per ANSI J-STD-006.
FLUX: ROL1 per ANS J-STD-004.
THERMAL INDICATOR: Color changes to colorless per NAS-1744.

APPLICATION

1. This kit is for making environment resistant in-line splices in cables having tin, silver or nickel-plated shields, 24 or 22 AWG tin-plated primaries and a temperature rating of at least 125°C.
2. The primary conductors are spliced with item (3).
The cable is shielded with item (2).
3. Splices will meet performance requirements of U.S. Air Force Specification Control Drawing 8340708 when installed in accordance with Raychem Process Standard RCPS-150-01.

PREPARED BY: R. MAPALO	CAGE CODE: 06090	ECO: ECO-20-005255	SCALE: NTS	SIZE: A	SHEET: 2 of 2
---------------------------	---------------------	-----------------------	---------------	------------	------------------

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raych trademarks
Downloaded From [Oneyac.com](https://www.oneyac.com)

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)