

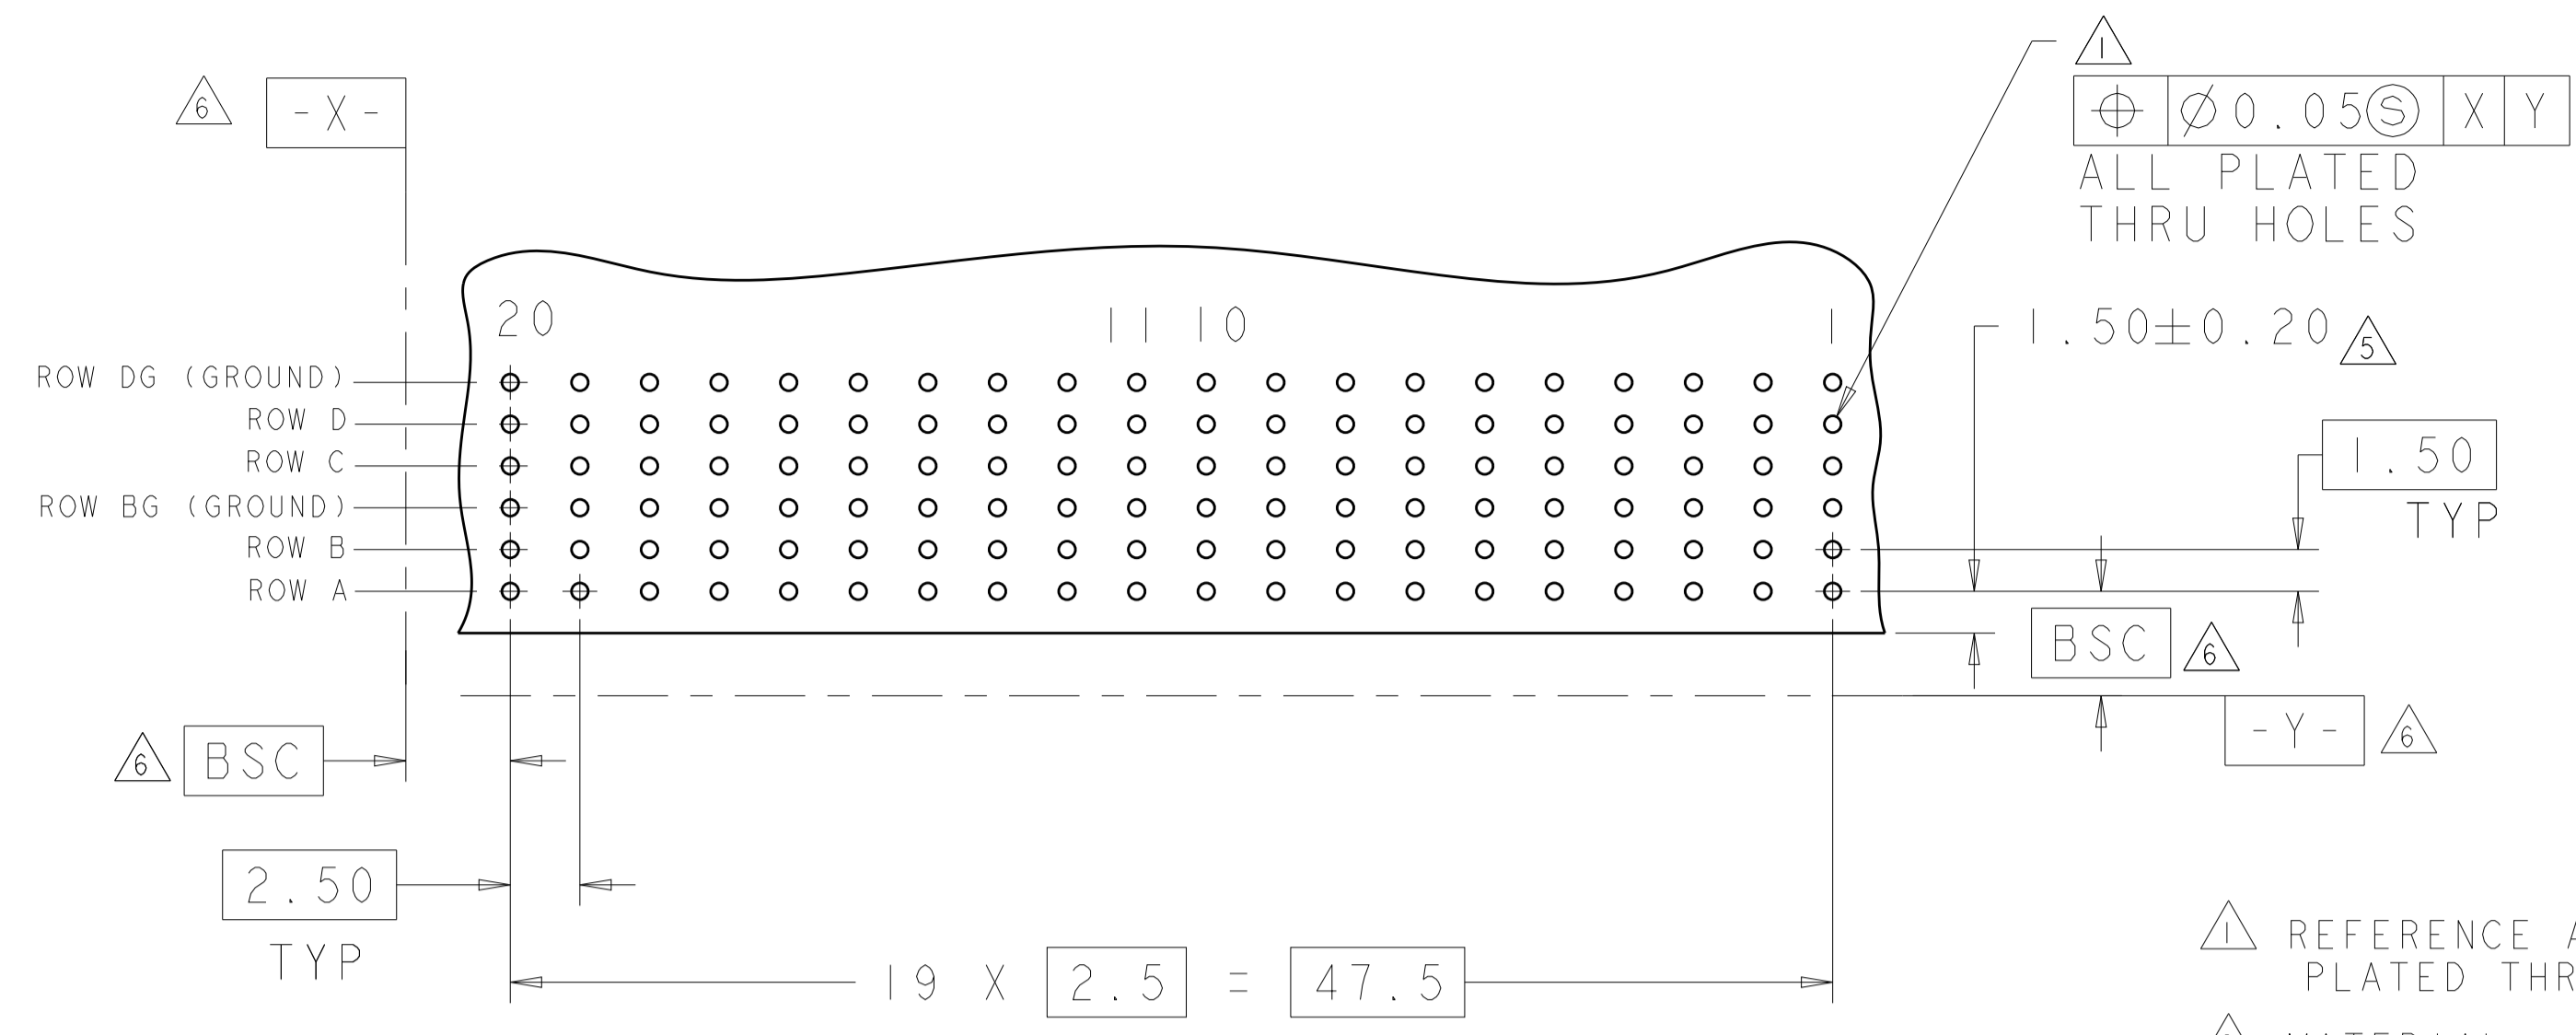
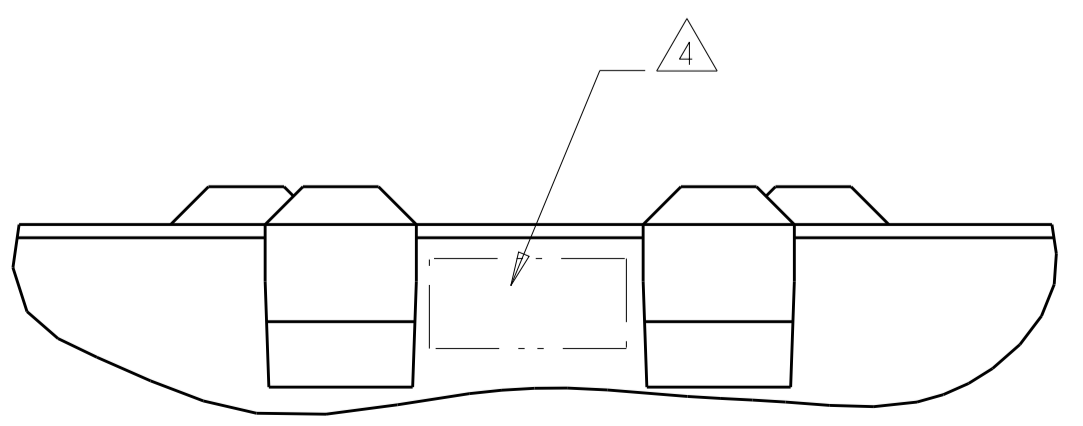


REVISIONS				
P	LTN	DESCRIPTION	DATE	APPROVED
E		REVISED PER ECO-14-005095	11APR2014	AP RP
F		REVISED PER ECO-16-008845	21SEP2016	AP RP

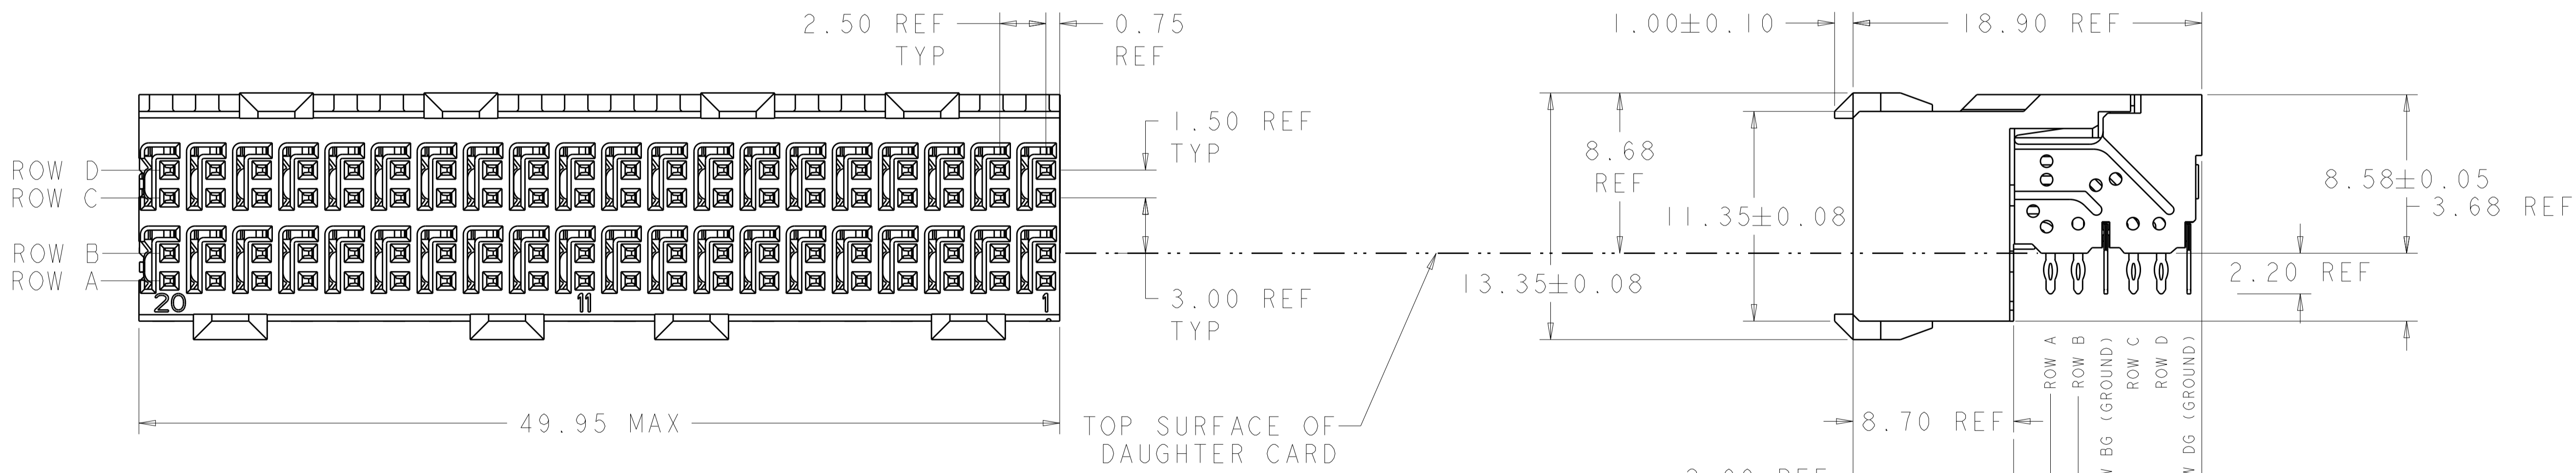

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER -
GLASS FILLED POLYESTER, UL 94V-0 RATED.
- △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED
ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT
TIN-LEAD OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
IN APPROXIMATE AREA SHOWN
- △ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY
CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT,
 DAUGHTER BOARD,
 COMPONENT SIDE SHOWN
 SCALE 4:1

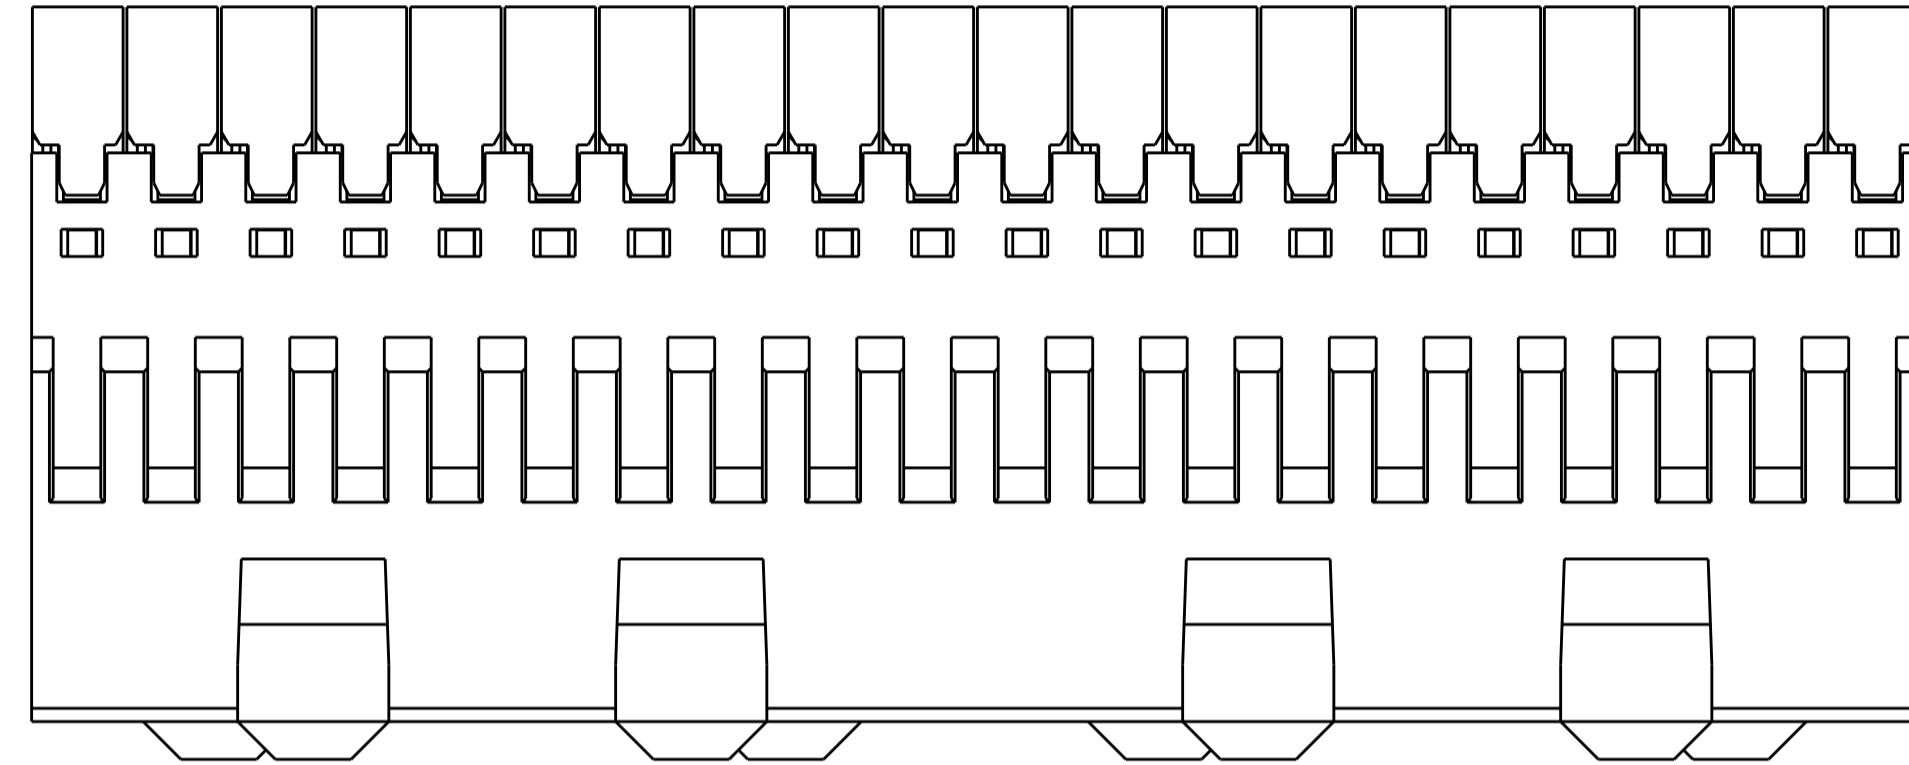

1469077-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: S. J. MAGARO 25APR2002	TE Connectivity
DIMENSIONS: mm		CHK: N. F. SCHRÖLL 16MAY2007	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: B. PATTERSON	NAME: RECEPTACLE ASSEMBLY, 2 PAIR, 50mm, HMZd
0 PLC	±	PRODUCT SPEC	SIZE: A100779C=1469077
1 PLC	±	APPLICATION SPEC	RESTRICTED TO
2 PLC	±	WEIGHT	SCALE: 5:1 SHEET 1 OF 1 REV F
3 PLC	±	CUSTOMER DRAWING	
4 PLC	±		
ANGLES	±		
FINISH	△3		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)