

SPECIFICATION CONTROL DRAWING


55/7320

TITLE SIX CONDUCTOR CABLE, SHIELDED, JACKETED, OUTER SPACE, 600 VOLT

Date 5-23-96

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

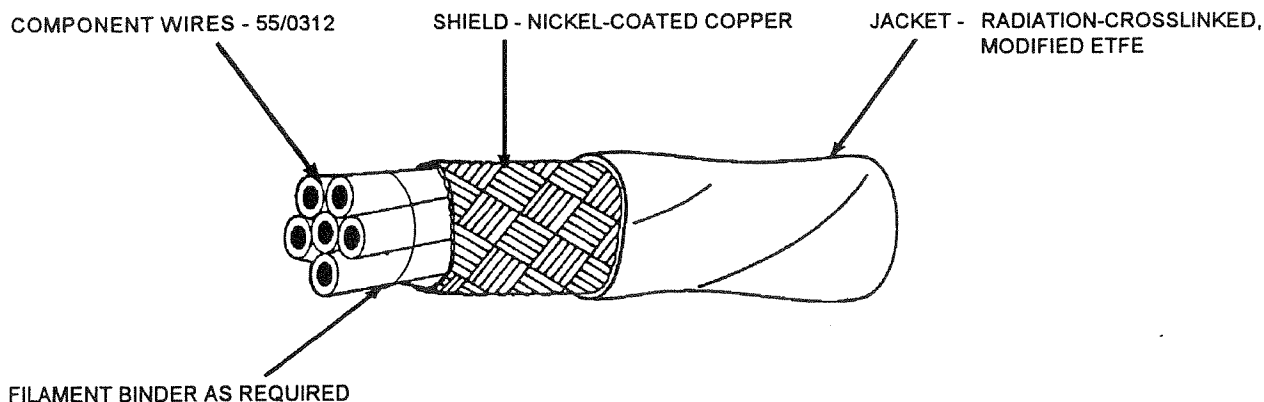

CABLE CONSTRUCTION DETAILS							
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/7320-20-*	20	38	.0045	.0055	.177	.185	37.45
55/7320-16-*	16	38	.0050	.0060	.229	.240	66.20

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms) at sea level
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 JACKET COLOR: White preferred
 JACKET ELONGATION: 75% (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 90% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1500 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.
 Example: AWG 20, white, white with blue stripe, white with orange stripe, white with green stripe, white with red stripe and white with black stripe component wires; white jacket:
 55/7320-20-9/96/93/95/92/90-9

NOTE: Nominal values are for information only.
 Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2 Raychem FAX: 1-415-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)