


CUSTOMER DRAWING

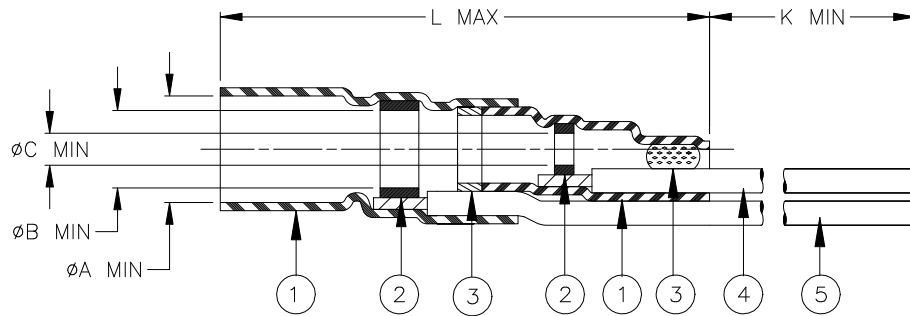


Product Name	Product Dimensions					Cable Dimensions				
	øA min	øB min	øC min	L max	K min	øD	øE	øF min	G±0.5 (G±0.02)	M±0.5 (M±0.02)
B-020-42-05	6.30 [.248]	4.60 [.181]	2.80 [.110]	31.00 [1.220]	180.00 [7.087]	2.20 [.087] to 5.70 [.224]	2.10 [.083] to 4.50 [.177]	0.30 [.012]	17.0 [.669]	6.0 [.236]

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL0 per ANSI-J-STD-004.
- MELTABLE RINGS: Thermally stabilized thermoplastic.
- CONDUCTOR LEAD: Raychem 55A0111-22 in accordance with MIL-W-22759/32 AWG22 stranded tin plated copper.
Color: white.
- GROUND LEAD: Raychem 55A0111-22 in accordance with MIL-W-22759/32 AWG22 stranded tin plated copper.
Color: black.

APPLICATION

- This controlled soldering device is designed for termination of coaxial cables to connectors and printed circuit boards. They will terminate the tin or silver-plated center conductor and the single or double tin or silver-plated copper braid of a coaxial cable having an insulation rated for at least 125°C.
- Temperature range: -55°C to +150°C.
- Install using TE Connectivity approved convection or infrared heating tools in accordance with Raychem Installation Procedure RPIP-500-03.

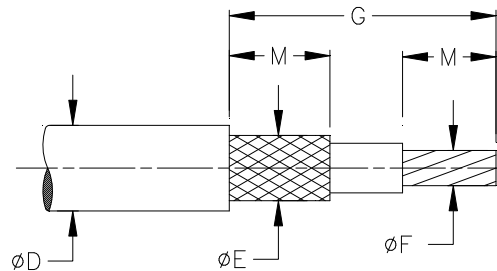

NOTE: For best results, prepare the cable as illustrated above.

		Raychem Devices		TITLE : COAXIAL SOLDER SLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES		
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN [.xxx] BRACKETS.</small>				DOCUMENT NO.: B-020-42-05		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOCUMENT REVISION: B	REVISOR ISSUE DATE: 12-MAR-2020	
DRAWN BY: M. FORONDA	DATE: 18-DEC-2000	CAGE CODE: 06090	ECO NUMBER: ECO-20-003669	SCALE: None	SIZE: A	SHEET: 1 of 1

© 2000 - 2020 TE Connectivity Corporation. All Rights Reserved.
TE Connectivity, TE Connectivity (logo), Raychem and SolderSleeve are trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)