

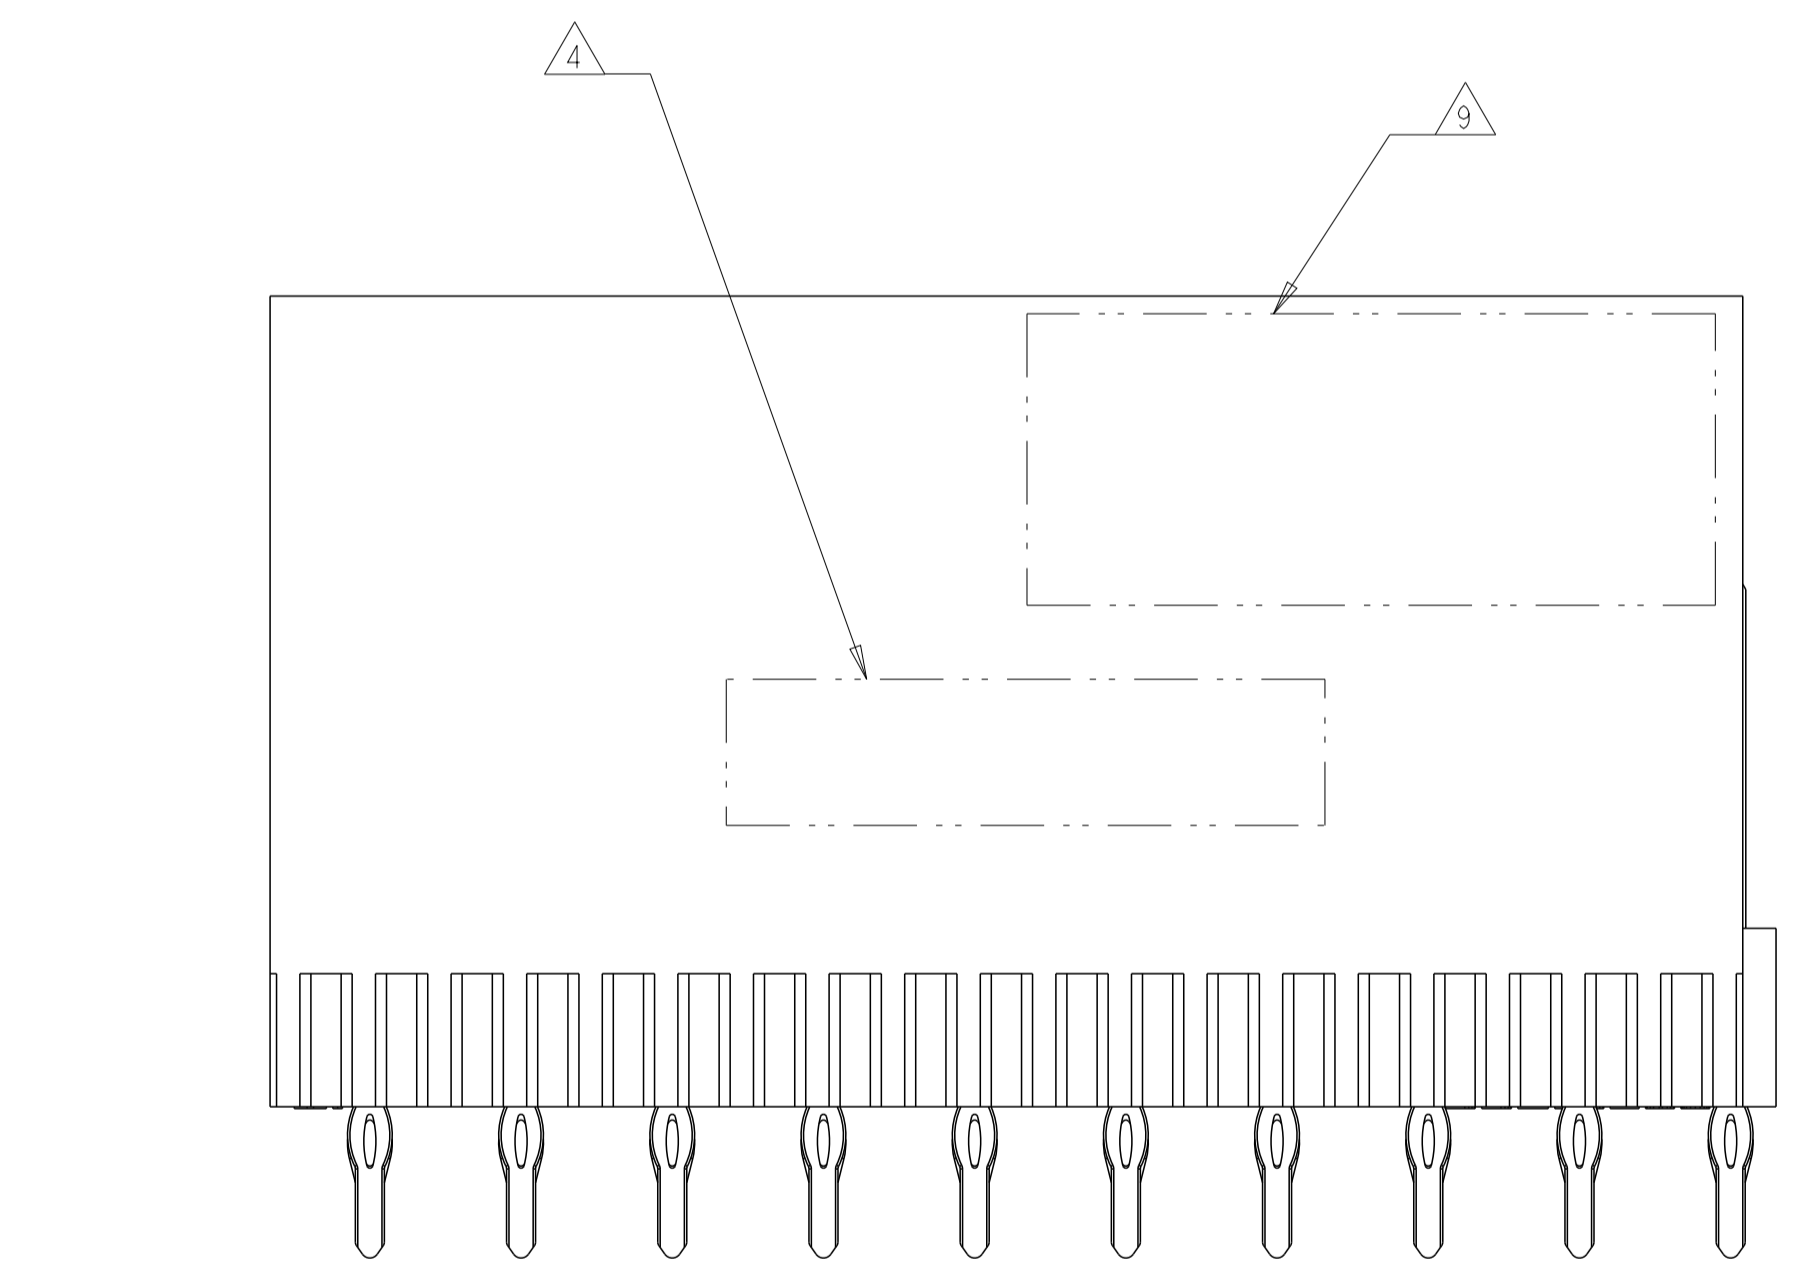
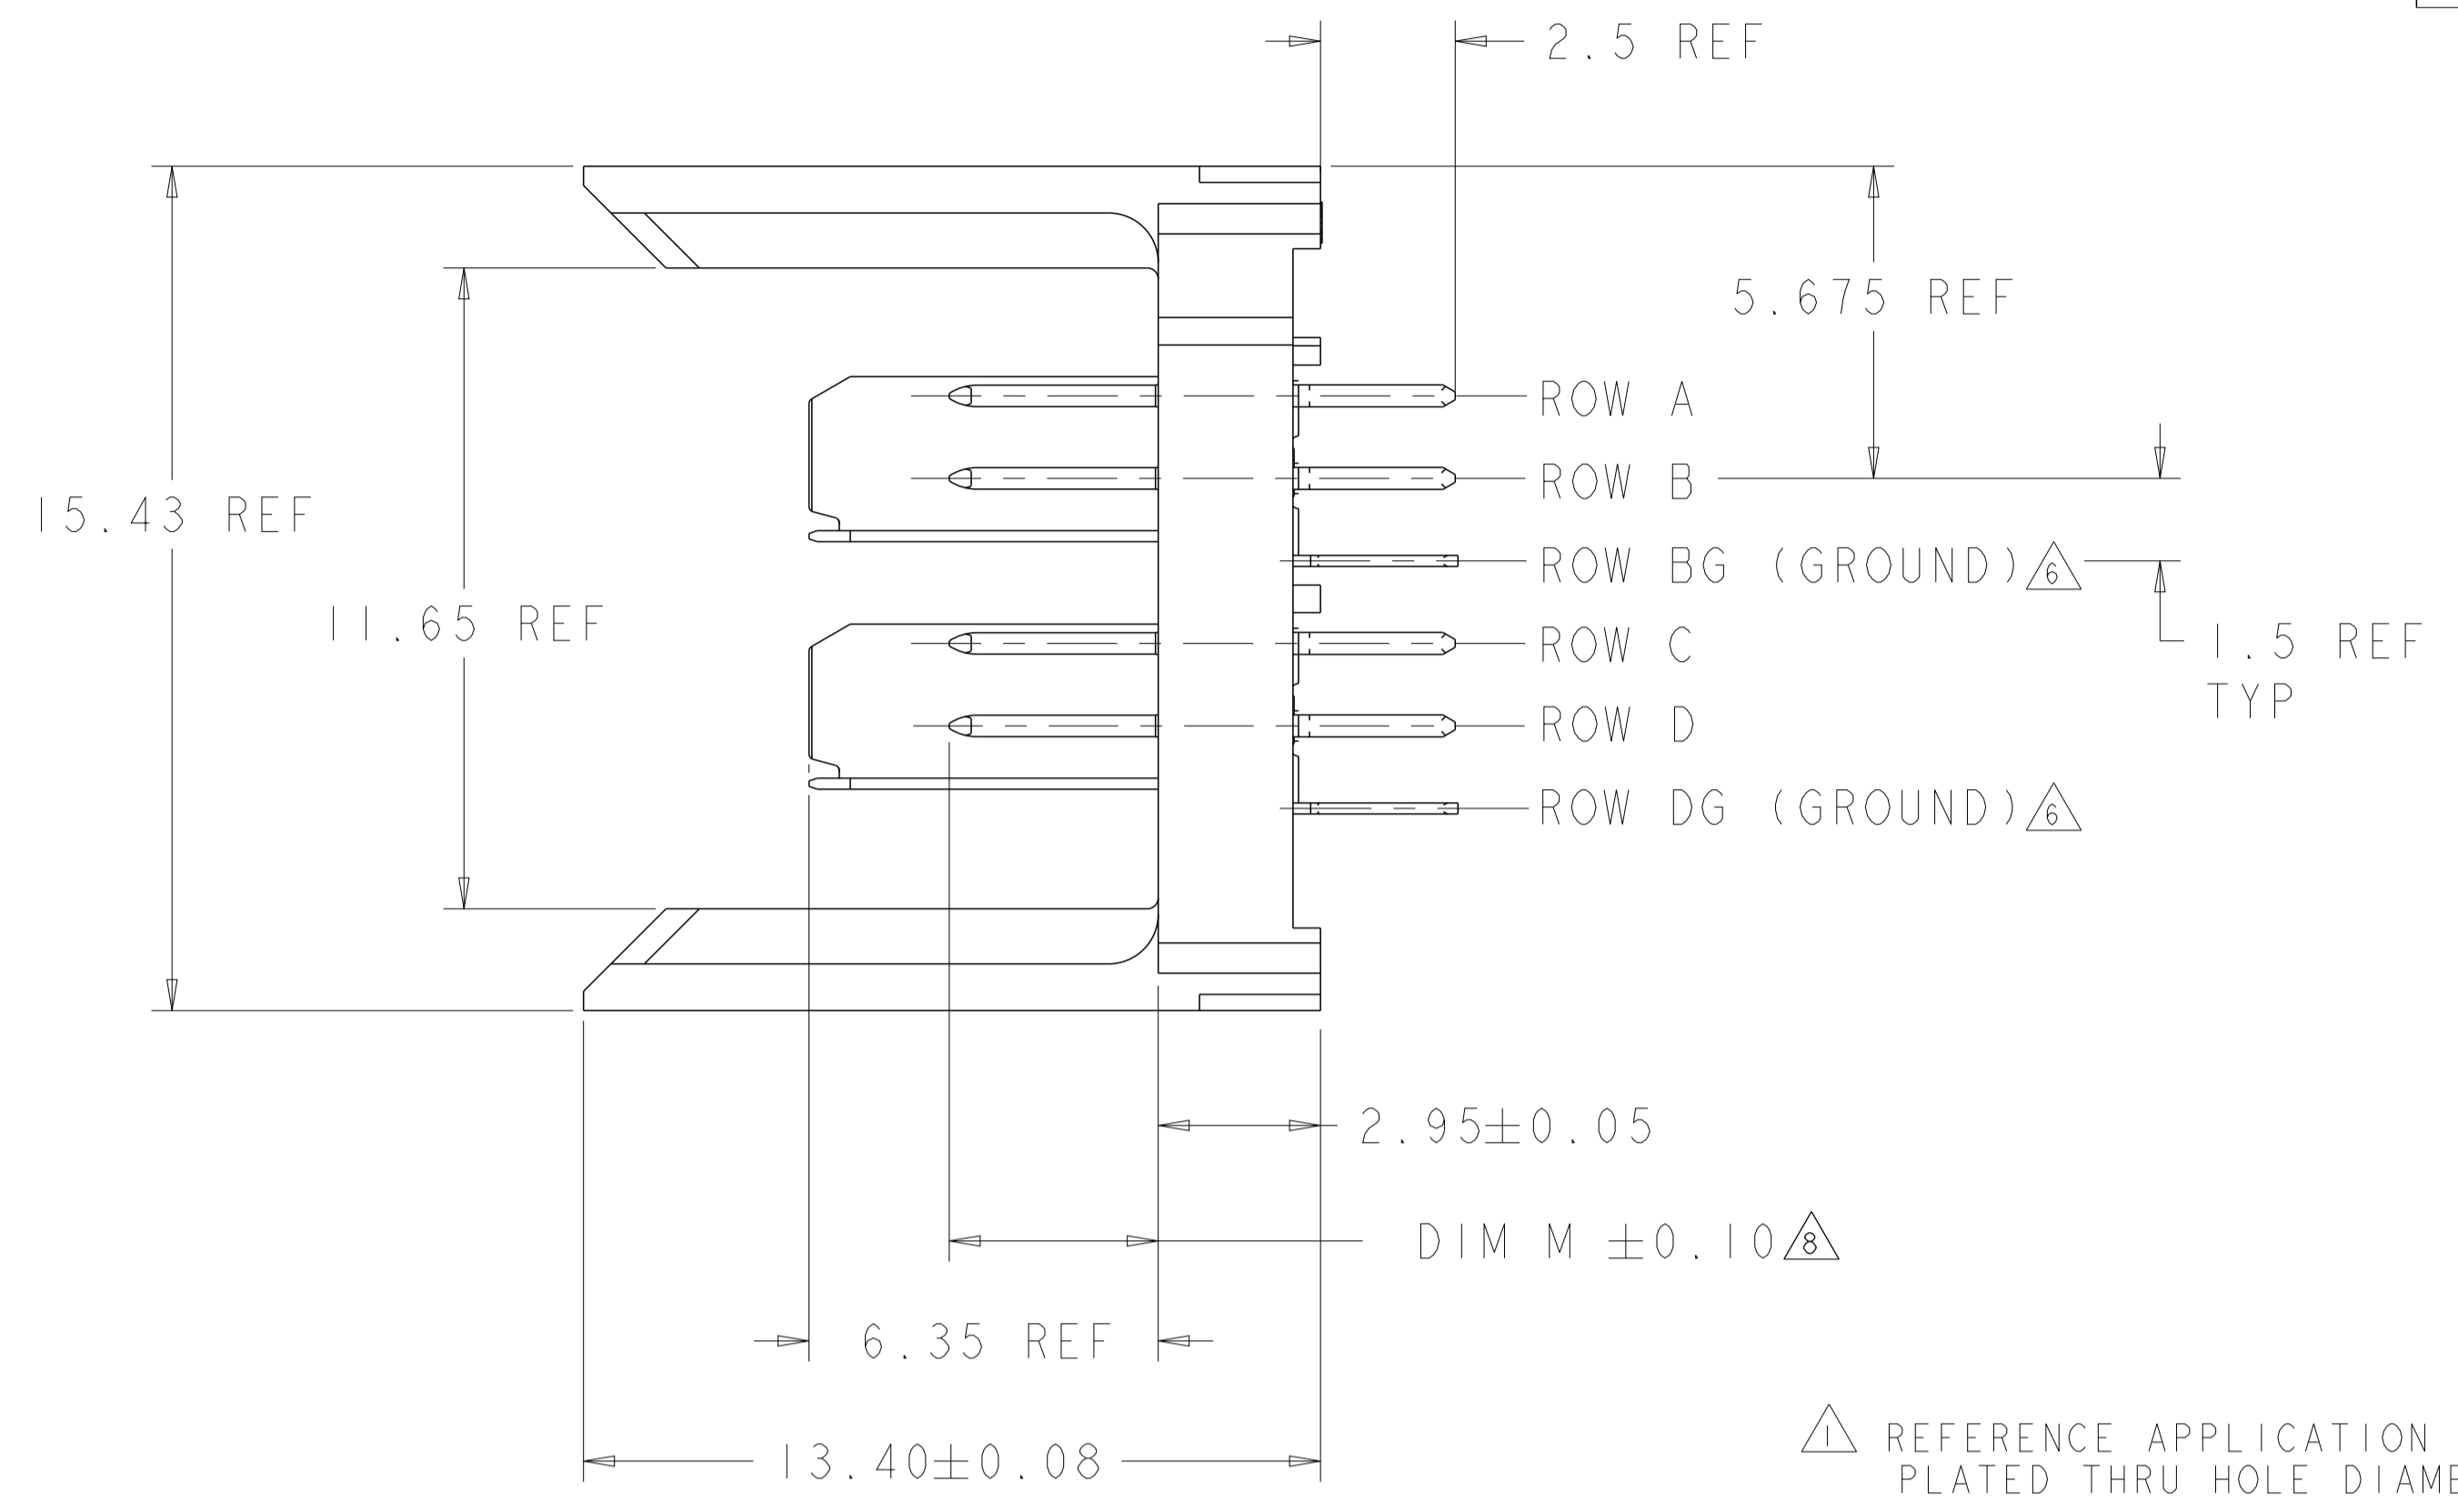


LOC		DIST		REVISIONS				
P	LTN	DESCRIPTION	DATE	DMN	APVD			
C		REVISED PER ECO-12-000118	17JAN12	KH	DY			
D		REVISED PER ECO-18-018129	25SEP2019	AP	DS			

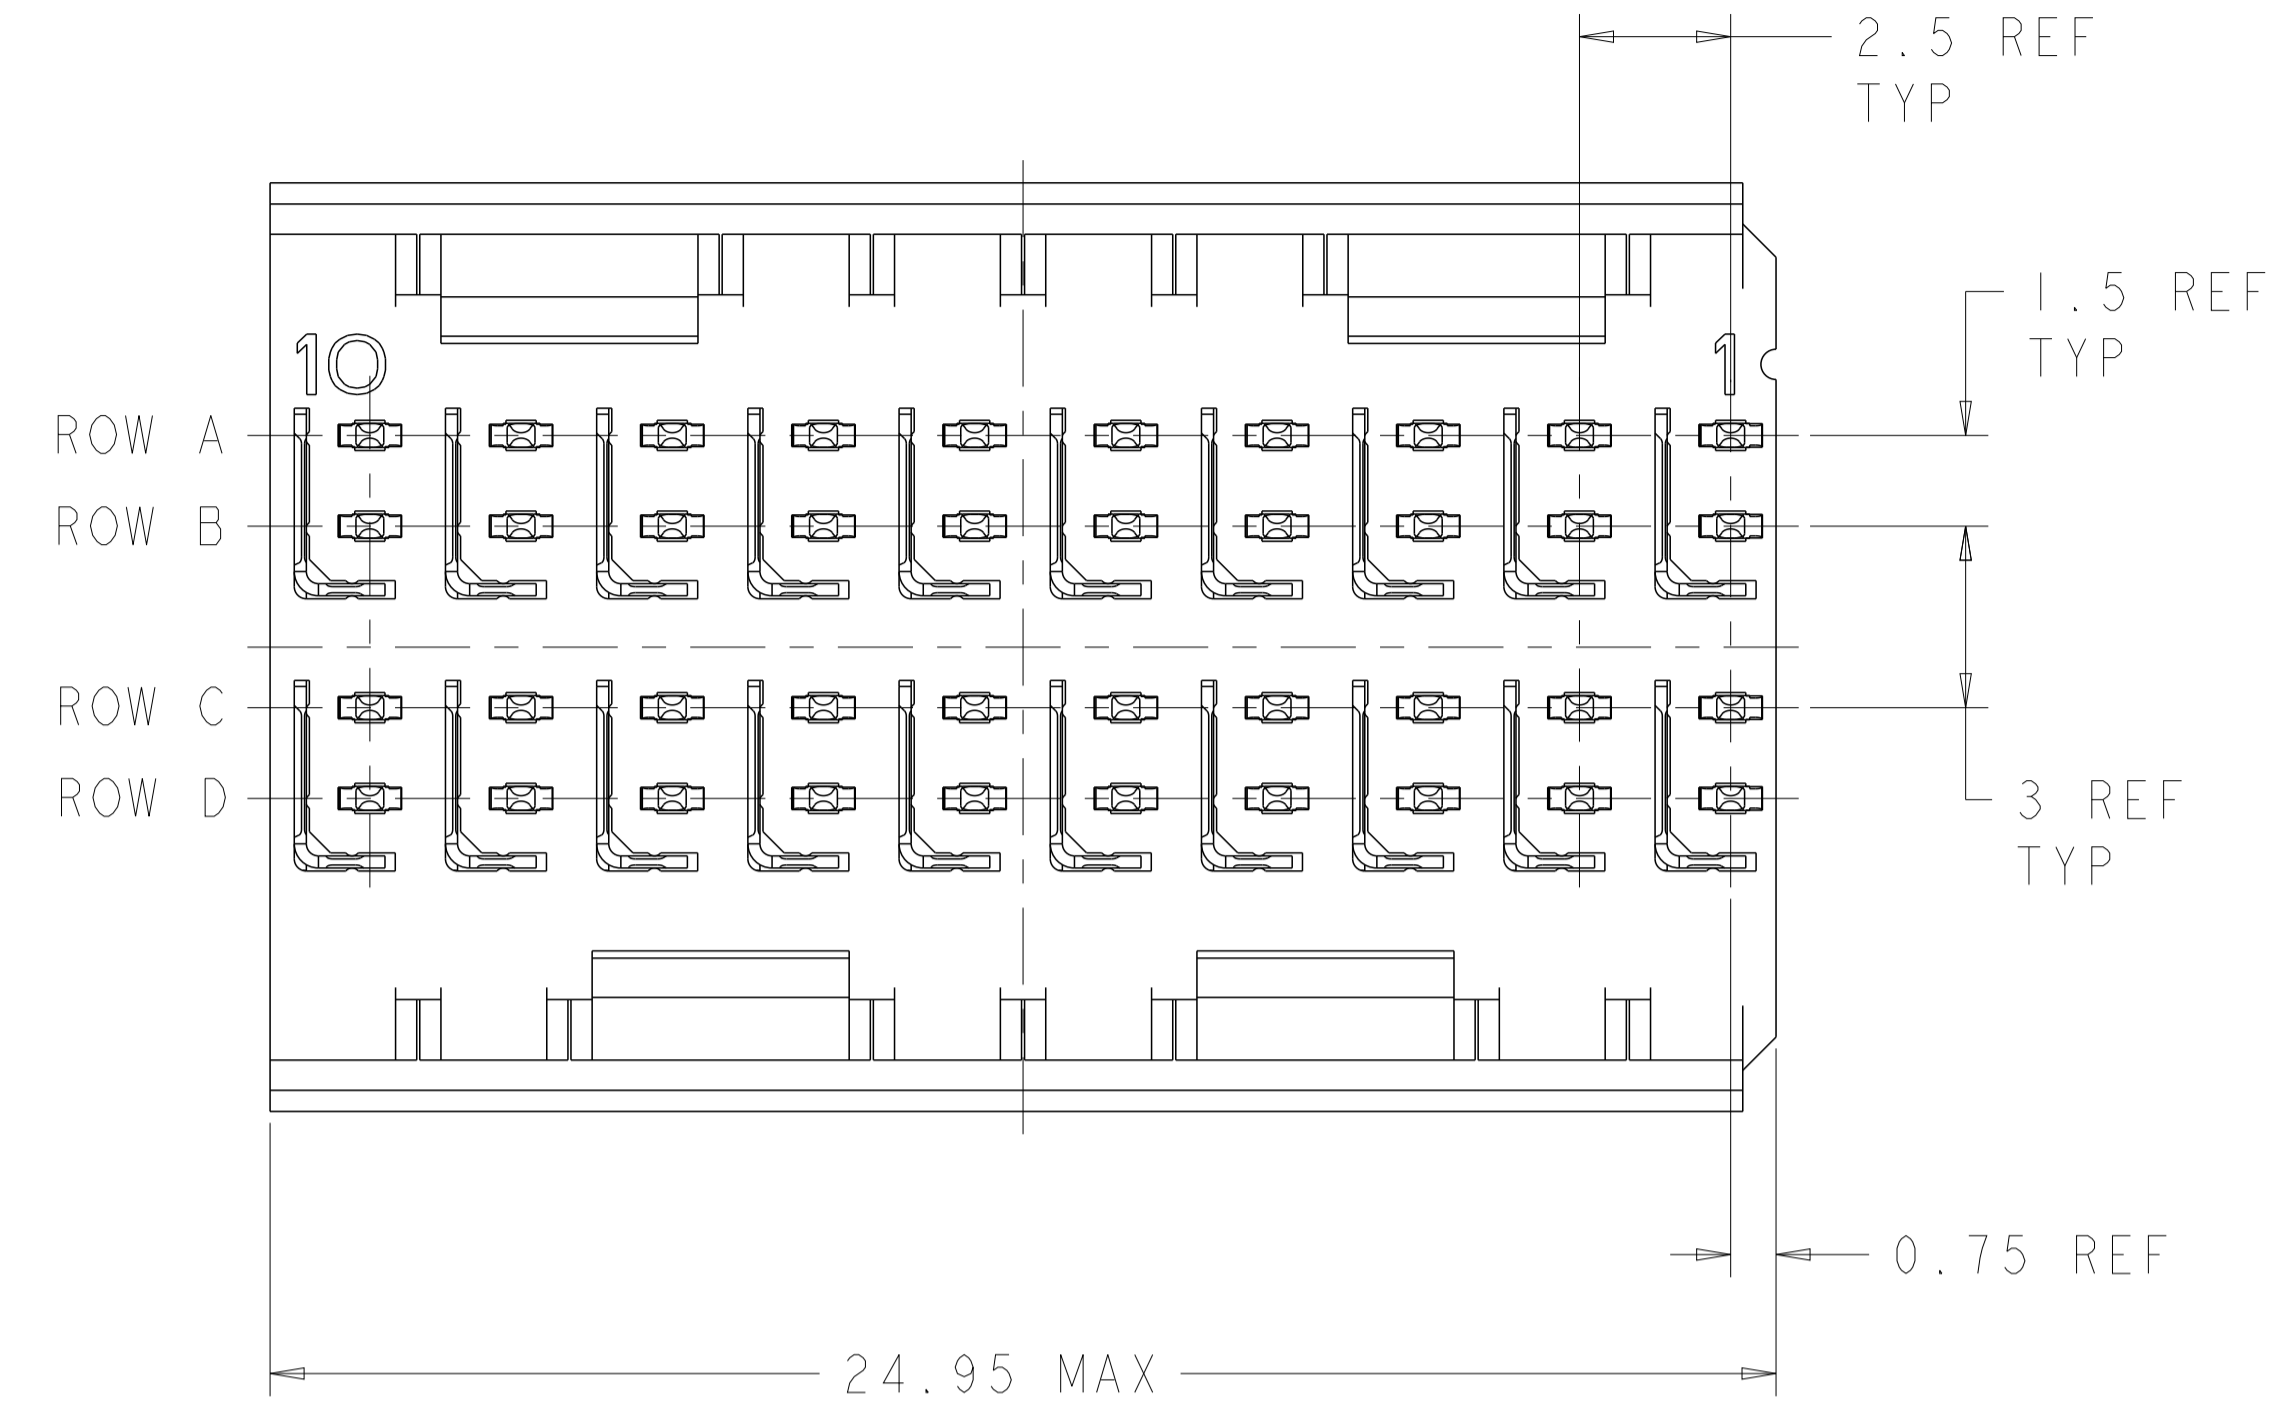

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER. UL 94V-0.
- △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFER TO "CONTACT LAYOUT" CHART FOR SEQUENCING.
- △ TE OR TE CONNECTIVITY LOGO IS LOCATED.

⊕ ∅0.05Ⓢ X Y
 ALL PLATED THRU HOLES

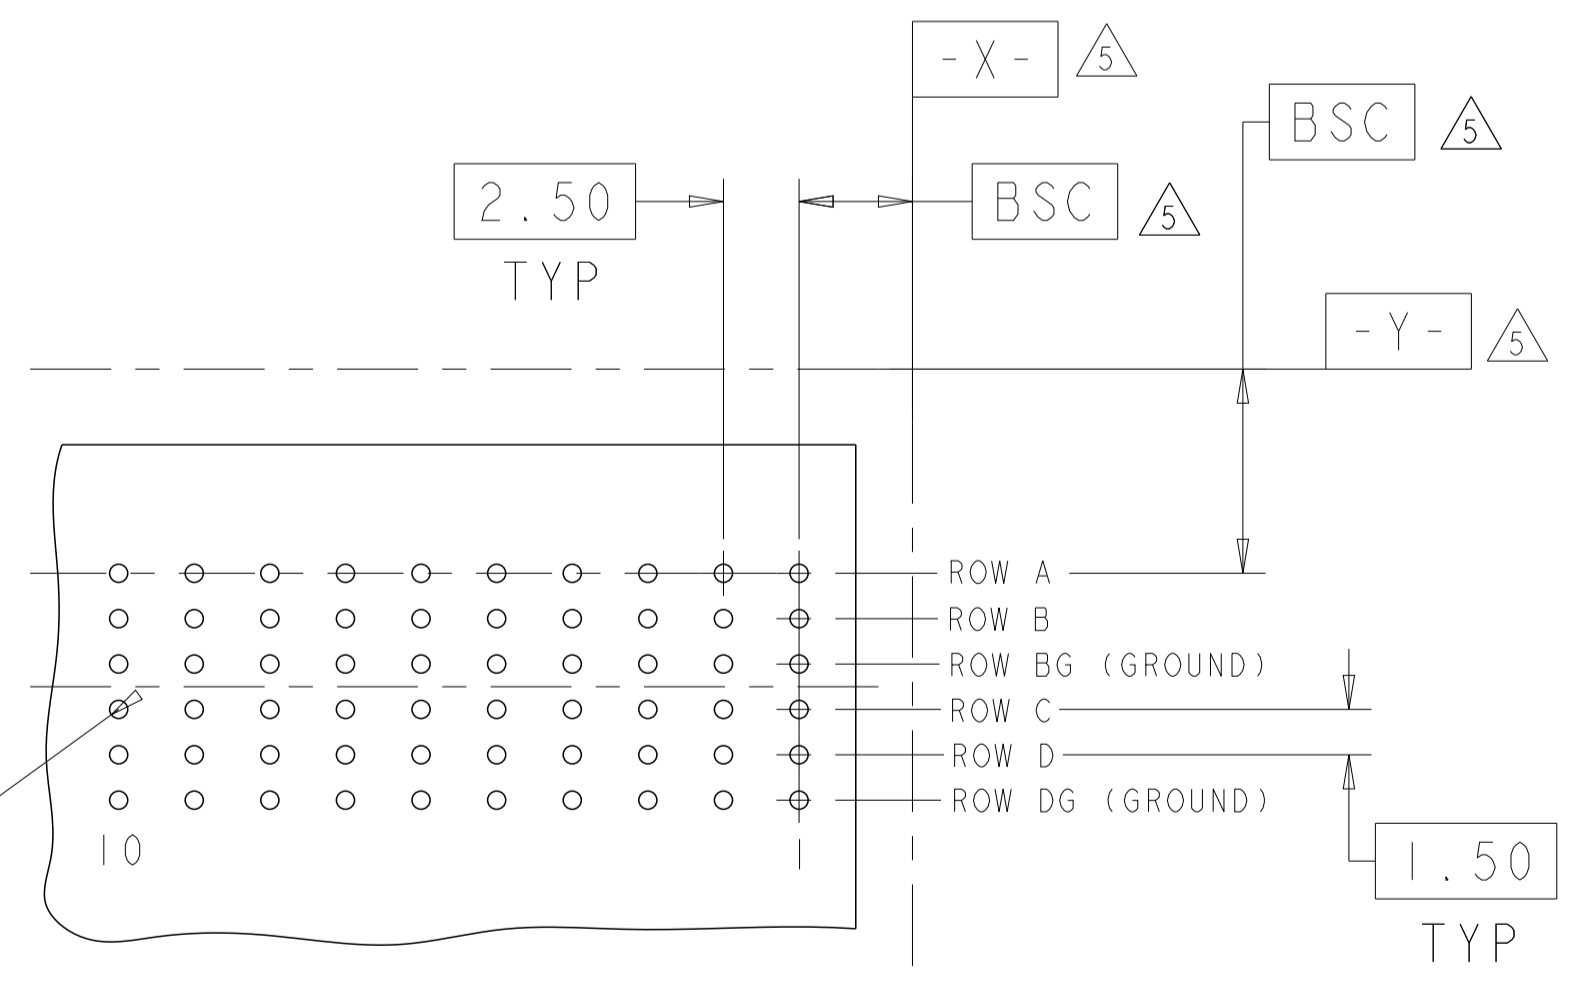

RECOMMENDED PC BOARD LAYOUT, BACKPLANE, COMPONENT SIDE SHOWN
 SCALE 4:1

CONTACT LAYOUT										
A = 3.80mm (DIM M)										
B = 5.30mm (DIM M)										
G = GROUND										
COLUMNS										
	10	9	8	7	6	5	4	3	2	1
ROWS	A	B	B	B	B	B	B	B	B	A
B	A	B	B	B	B	B	B	B	B	A
BG	G	G	G	G	G	G	G	G	G	G
C	A	B	B	B	B	B	B	B	B	A
D	A	B	B	B	B	B	B	B	B	A
DG	G	G	G	G	G	G	G	G	G	G

1469334-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN S. J. MAGARO 12JUN2003	TE Connectivity
DIMENSIONS:		CHK R. PATTERSON 12JUN2003	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON 17AUG2007	NAME HEADER ASSEMBLY, 2 PAIR, SELECTIVELY LOADED, 2.5mm TAIL, 25mm, HMzd
mm		PRODUCT SPEC	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO A100779C=1469334
MATERIAL		WEIGHT	
CUSTOMER DRAWING		SCALE 8:1	RESTRICTED TO

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)