

SPECIFICATION CONTROL DRAWING

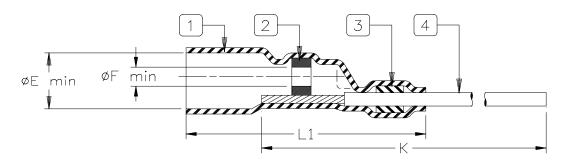

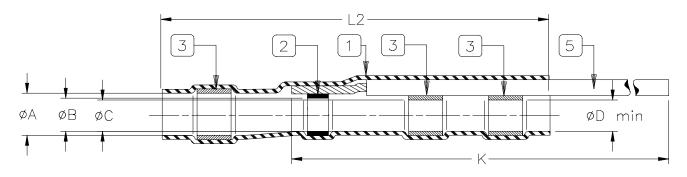

PRODUCT REVISION		"GA" = WIRE GAUGE (AWG)									
Product Name		Product Dimensions									
		A	В	C	D	Е	F	L1	L2	K	AWG
		min	min	min	min	min	min	MAX	MAX	min	
D-181-1826-6/9	F	3.70	3.20	2.70	2.40	2.30	0.70	17.00	21.5	150	26
D-181-1830-6/9	F	(0.145)	(0.125)	(0.105)	(0.095)	(0.090)	(0.030)	(0.670)	(0.850)	(5.900)	30

MATERIAL

- 1. Insulation Sleeve: Heat-shrinkable radiation cross-linked polyvinylidene fluoride. Transparent blue.
- 2. Solder Preform with Flux: Solder: Sn63 per ANSI J-STD-006

Flux: ROL1 per ANSI J-STD-004

- 3. Meltable Rings: Fluorocarbon-based thermoplastic.
- 4. Conductor Lead: MIL-W-81822/13-GA-9 (White).
- 5. Ground lead:. MIL-W-81822/13-GA-6 (Blue).

NOTES:

1. These parts are for use in terminating the conductor and shield of a coaxial cable meeting the following criteria:

Temperature rating of cable: At least 125°C Plating of Conductor and Shield: Tin or Silver

Diameters: Conductor: 0.25 to 0.7 (0.010 to 0.027); Shield: 1.0 to 3.2 (.04 to .125)

Jacket: 1.5 to 3.6 (0.060 to 0.140)

2. When installed in accordance with Raychem Process Standard RCPS-200-36 these parts will meet requirements of Raychem Specification RT-1404.

SolderSleeve is a trademark of Tyco Electronics Corporation.

tyco Electronics	300	Cyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.			Raychem	TITLE:	TITLE: COAXIAL SOLDERSLEEVE DEVICE WITH PRE-INSTALLED LEAD					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.							DOCUMENT NO D-181-18GA-6/9					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			DATE: Ma	DATE: Mar. 11, 1998		REV: SEE TABLE.		DOC ISSUE:	
DRAWN BY: CA R. MAPALO		CAGE	AGE CODE: REPLA 06090		CES: D18118XX		DCR NUMBER: D980659		e: ONE	SIZE:	SHEET: 1 of 1	

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)