
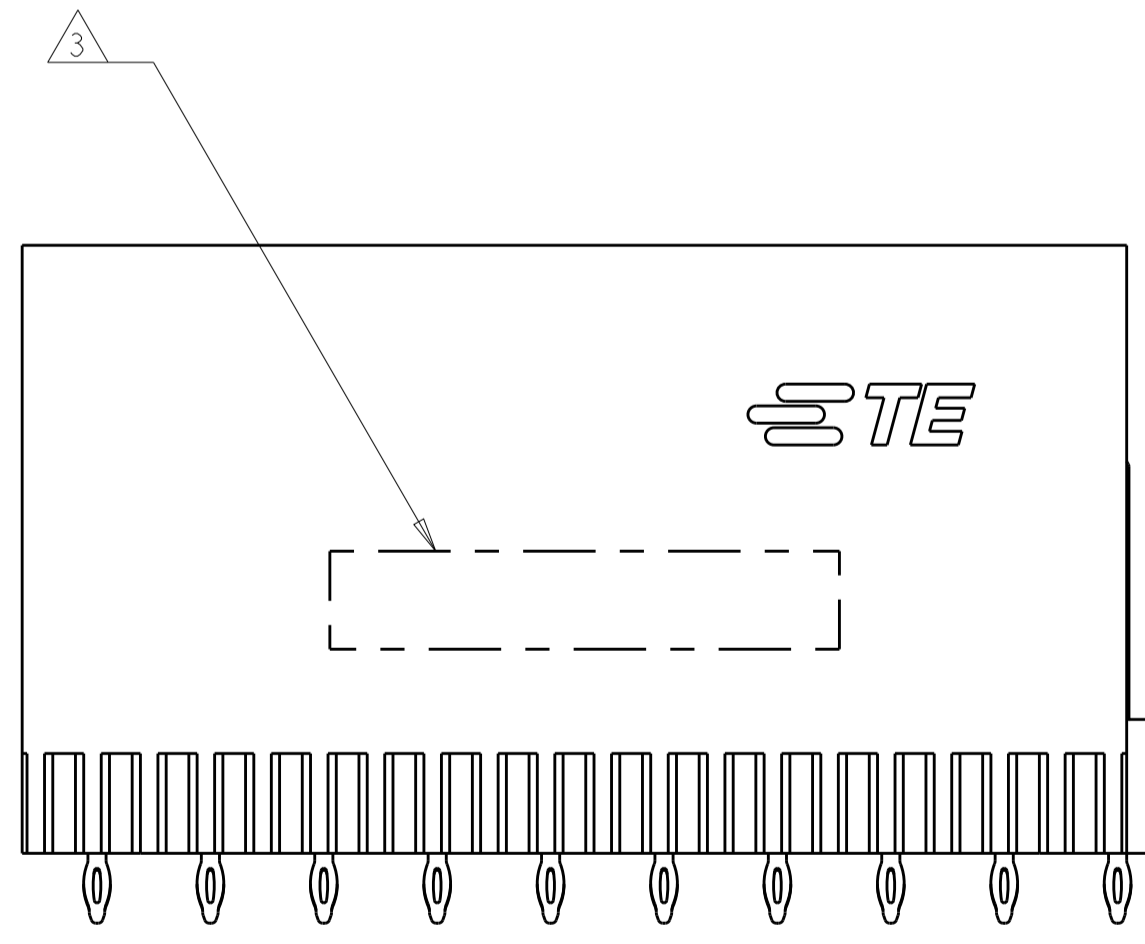
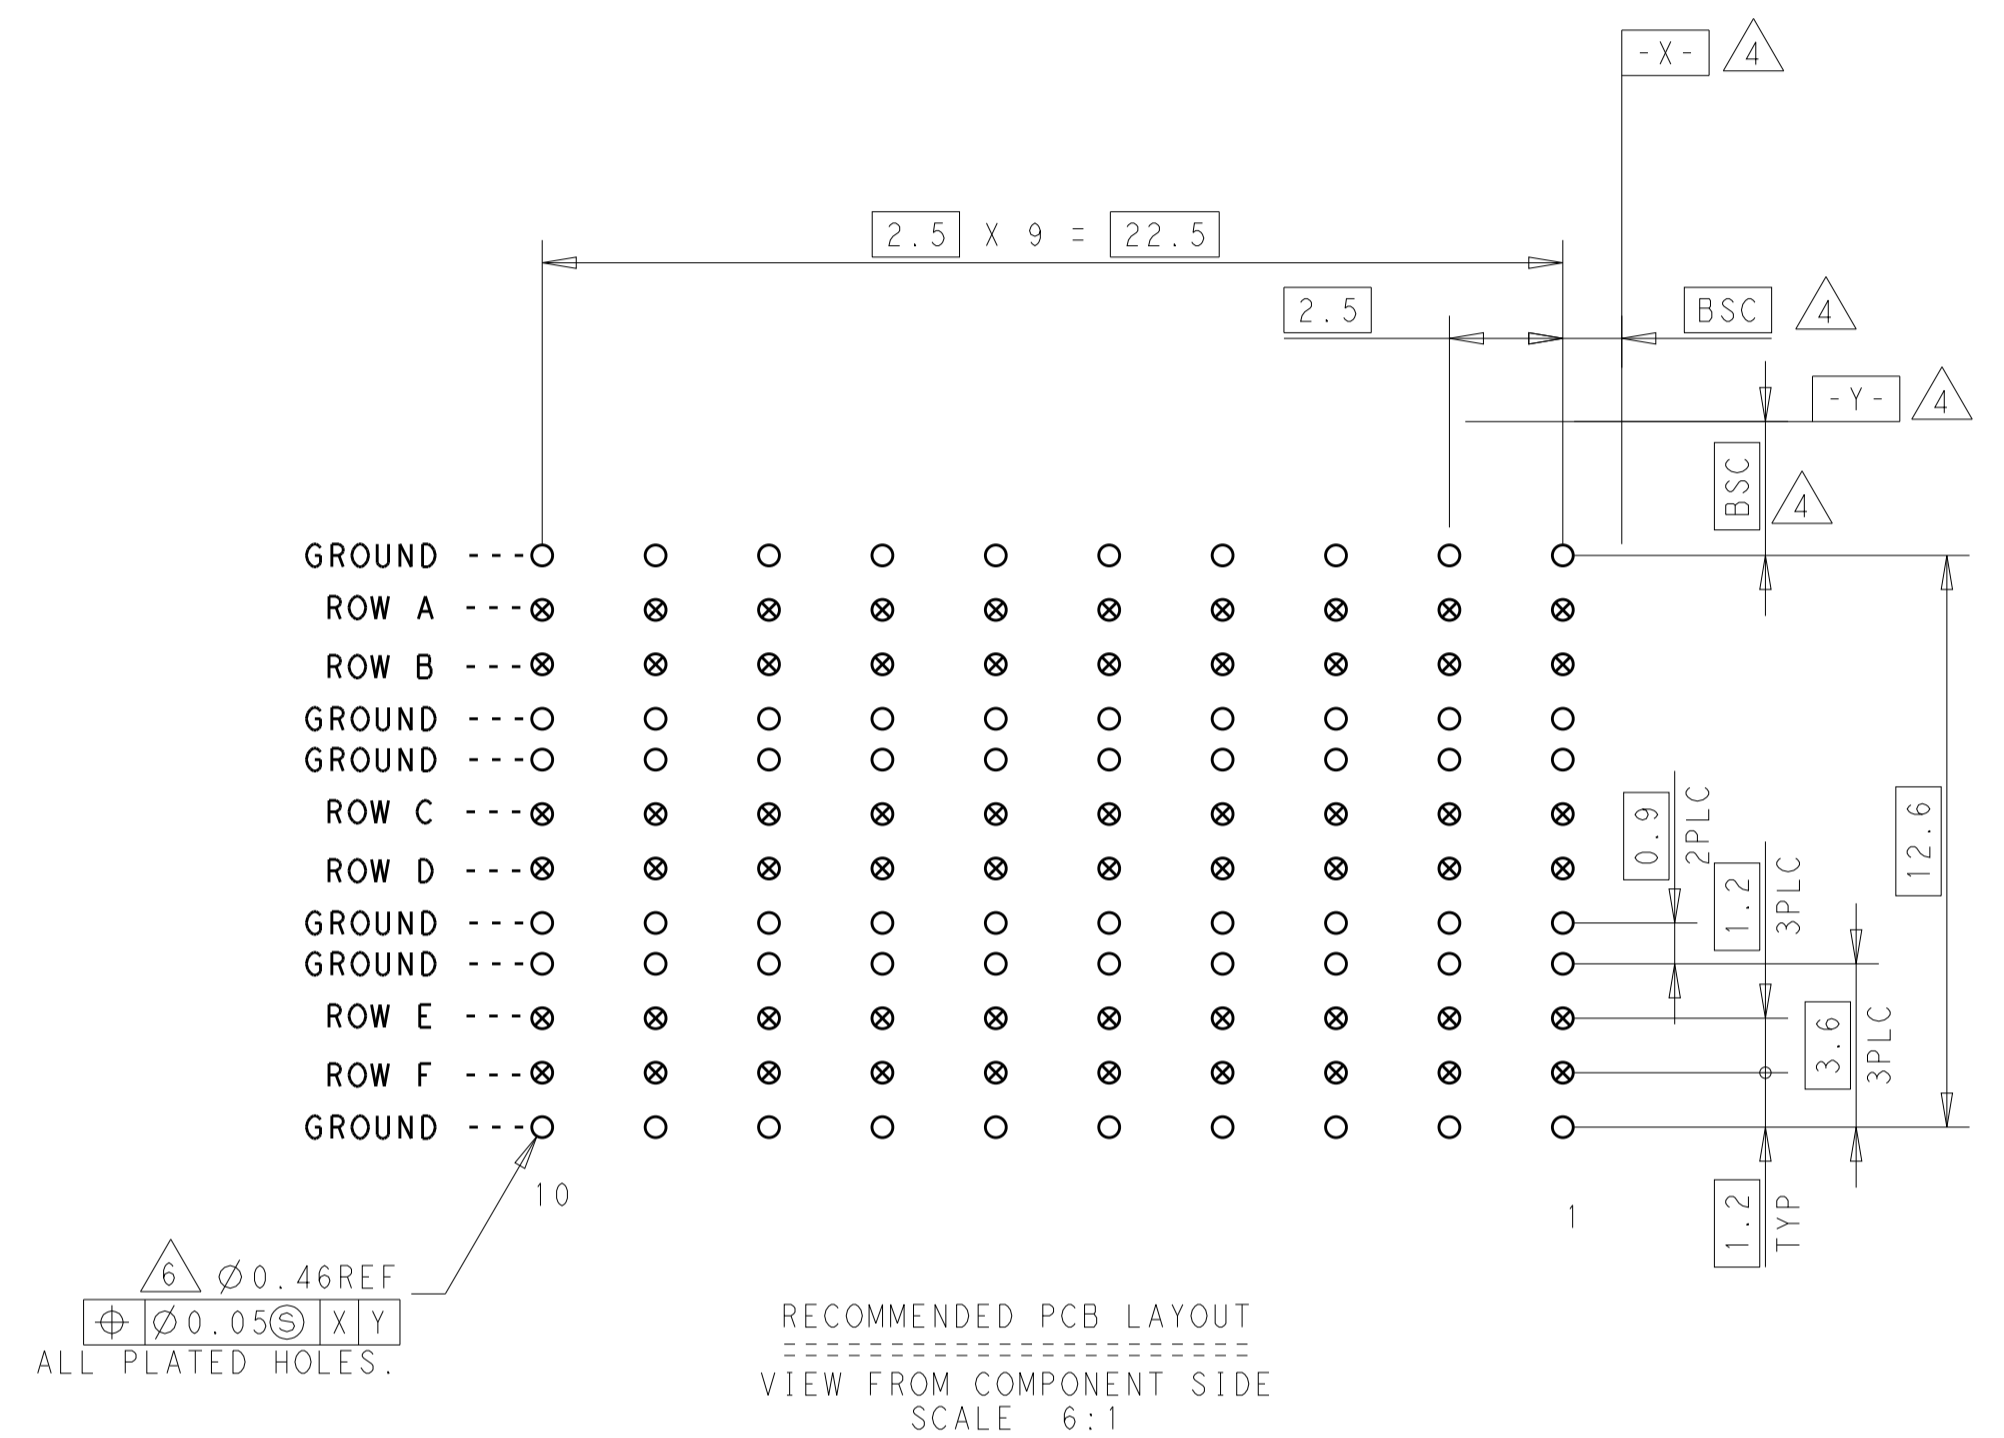
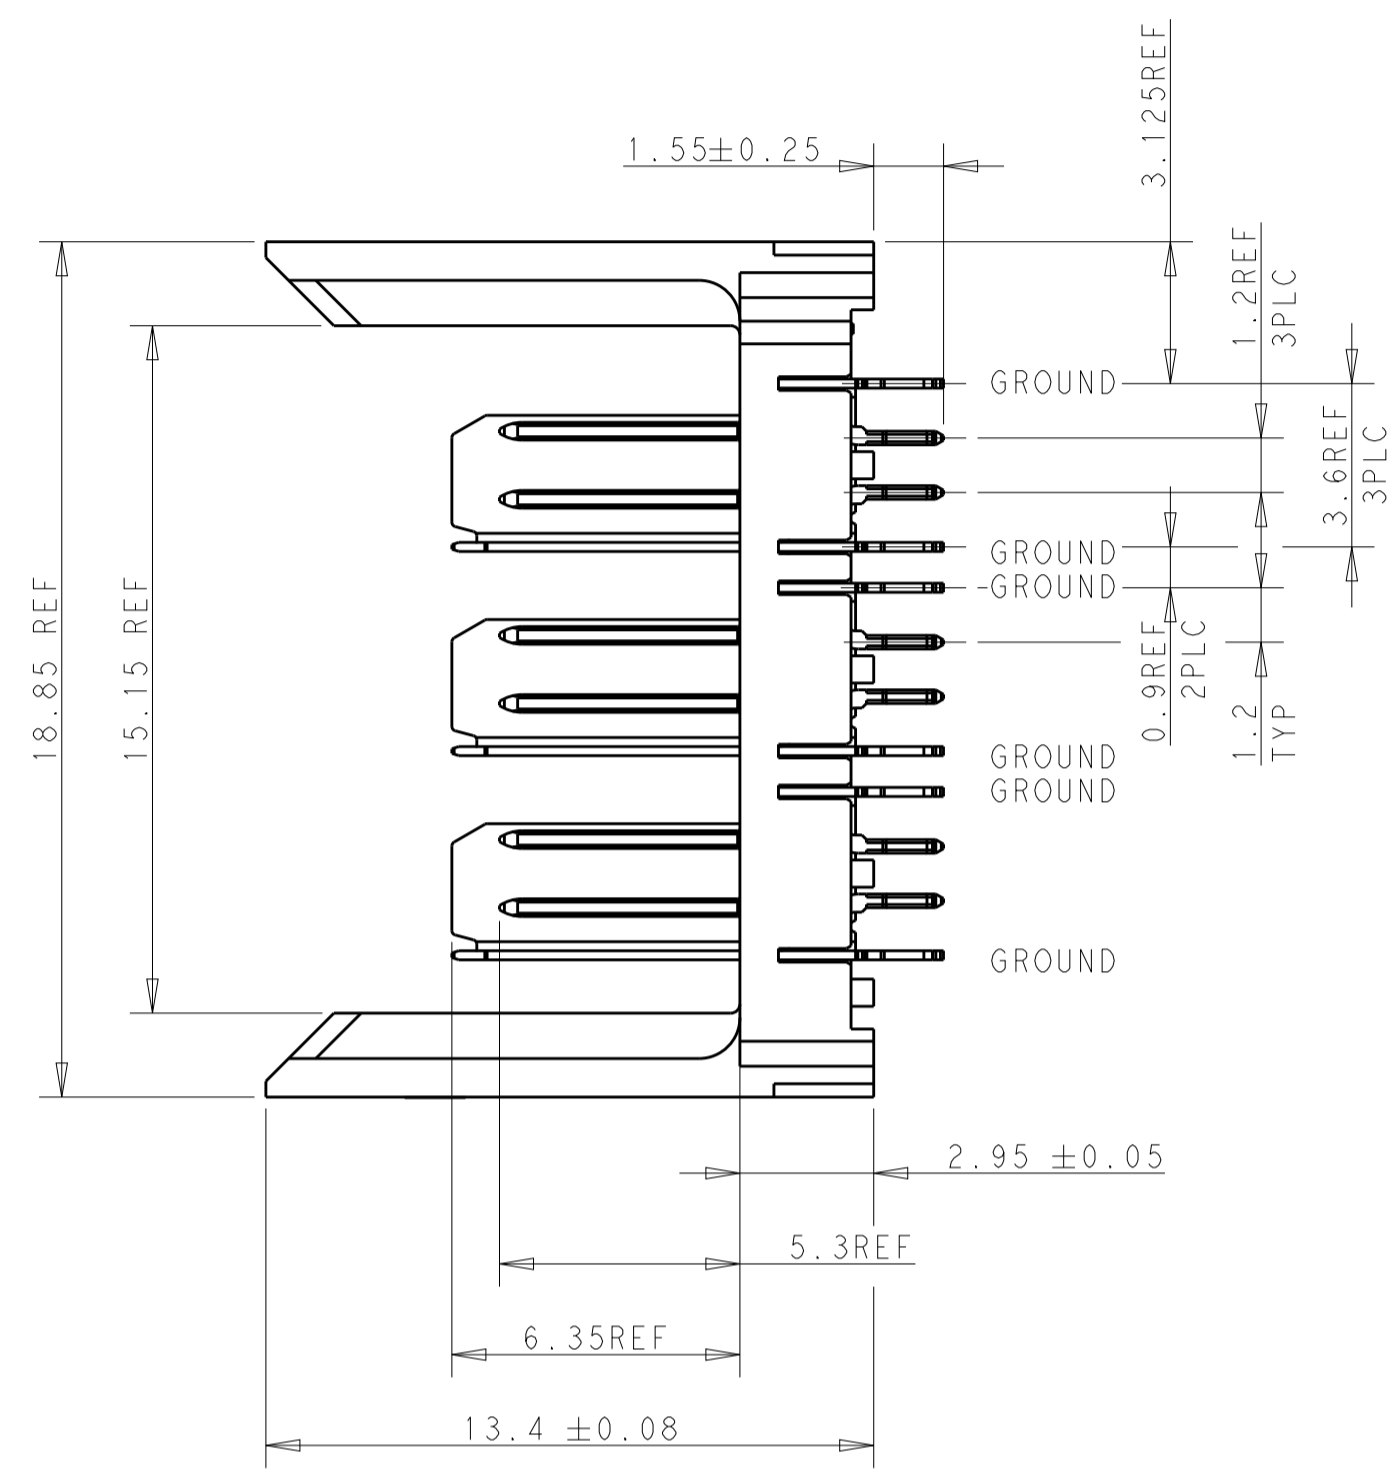


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
A		INITIAL RELEASE	4JAN2013	D.S	A.C		
B		PER ECR-13-008109	20MAY2013	D.S	M.Y		
C		PER ECO-18-007505	15MAY2018	D.S	H.L		

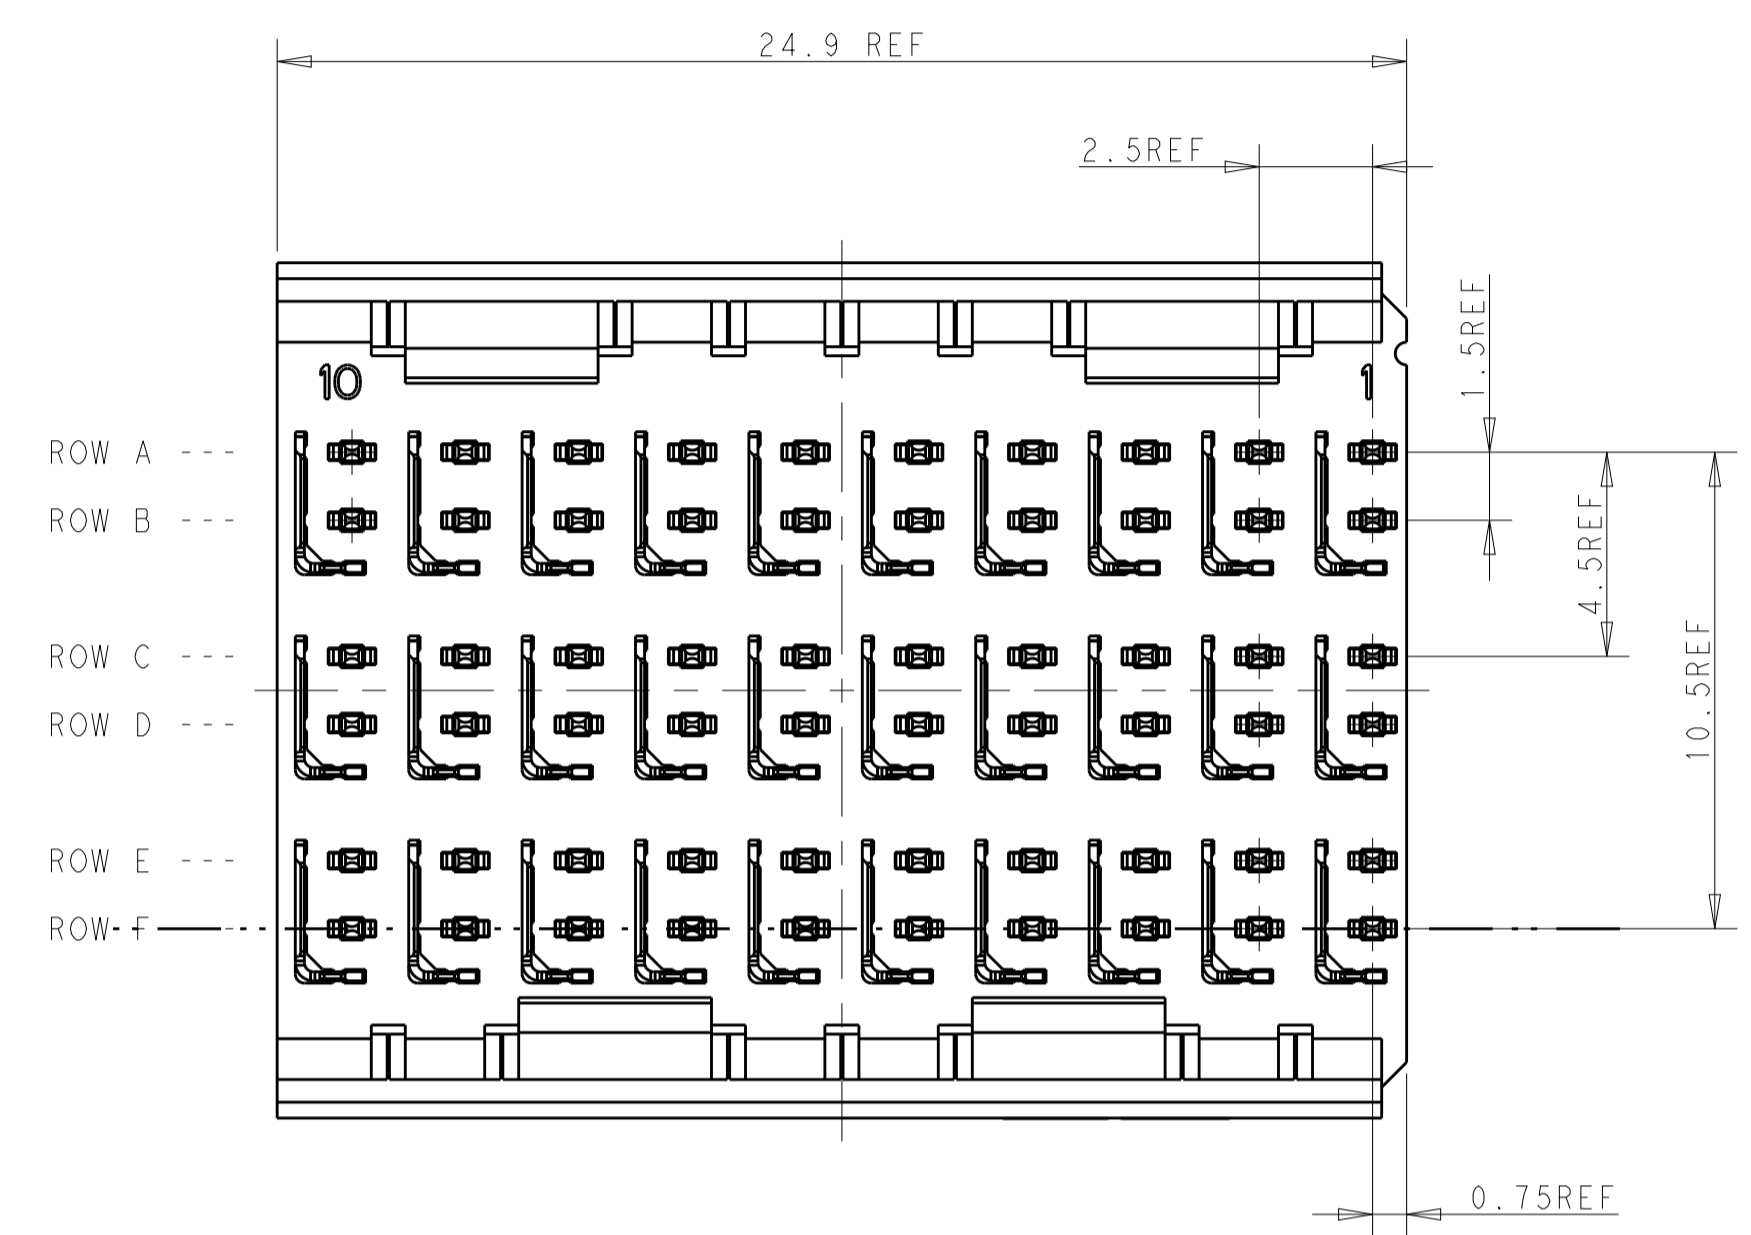

- 1 MATERIAL:
CONTACT AND SHIELD: PHOSPHOR BRONZE
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 um MIN MATTE
TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE
REFER TO APPLICATION SPEC 114-13059

2170245-1
 PART NO.

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-1.25 ± 0.25 1.25-3.0 ± 0.25 3.0-6.0 ± 0.30 6.0-15.0 ± 0.40 15.0-30.0 ± 0.50 30.0-60.0 ± 0.63 60.0-120.0 ± 0.75 120.0-240.0 ± 0.90 240.0-600.0 ± 1.10 600.0-1200.0 ± 1.40 1200.0-2400.0 ± 1.70 2400.0-6000.0 ± 2.10 6000.0-12000.0 ± 2.50 12000.0-24000.0 ± 3.00 24000.0-60000.0 ± 3.60 60000.0-120000.0 ± 4.20 120000.0-240000.0 ± 5.00 240000.0-600000.0 ± 6.00 600000.0-1200000.0 ± 7.00 1200000.0-2400000.0 ± 8.00 2400000.0-6000000.0 ± 9.00 6000000.0-12000000.0 ± 10.00		DMN DAVID SHEN 29MAR2012 CHK SANDERS YAN 29MAR2012 APVD ALEY CAI 29MAR2012		NAME ASSEMBLY DRAWING 3 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER	
MATERIAL: 1 FINISH: 2		PRODUCT SPEC 108-2055-1 APPLICATION SPEC 114-13059		SIZE CAGE CODE DRAWING NO A1 C=2170245			
CUSTOMER DRAWING		WEIGHT 114-13059		RESTRICTED TO SCALE 6:1 SHEET 1 OF 1 REV C			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)