


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|--------------------------|---------|-----|------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| G | 02 | | D1 | REDRAWN PER ECR 09-13445 | 11JUN09 | JR | TM |

| | | |
|--------------------------------|--------------------------------|--------------------------------|
| AMP WIRE RANGE | Listed FILE E13288 | LR7189 Certified |
| 22-16 AWG SOLID OR STRANDED | 22-16 AWG SOLID OR STRANDED | 22-16 AWG SOLID OR STRANDED |

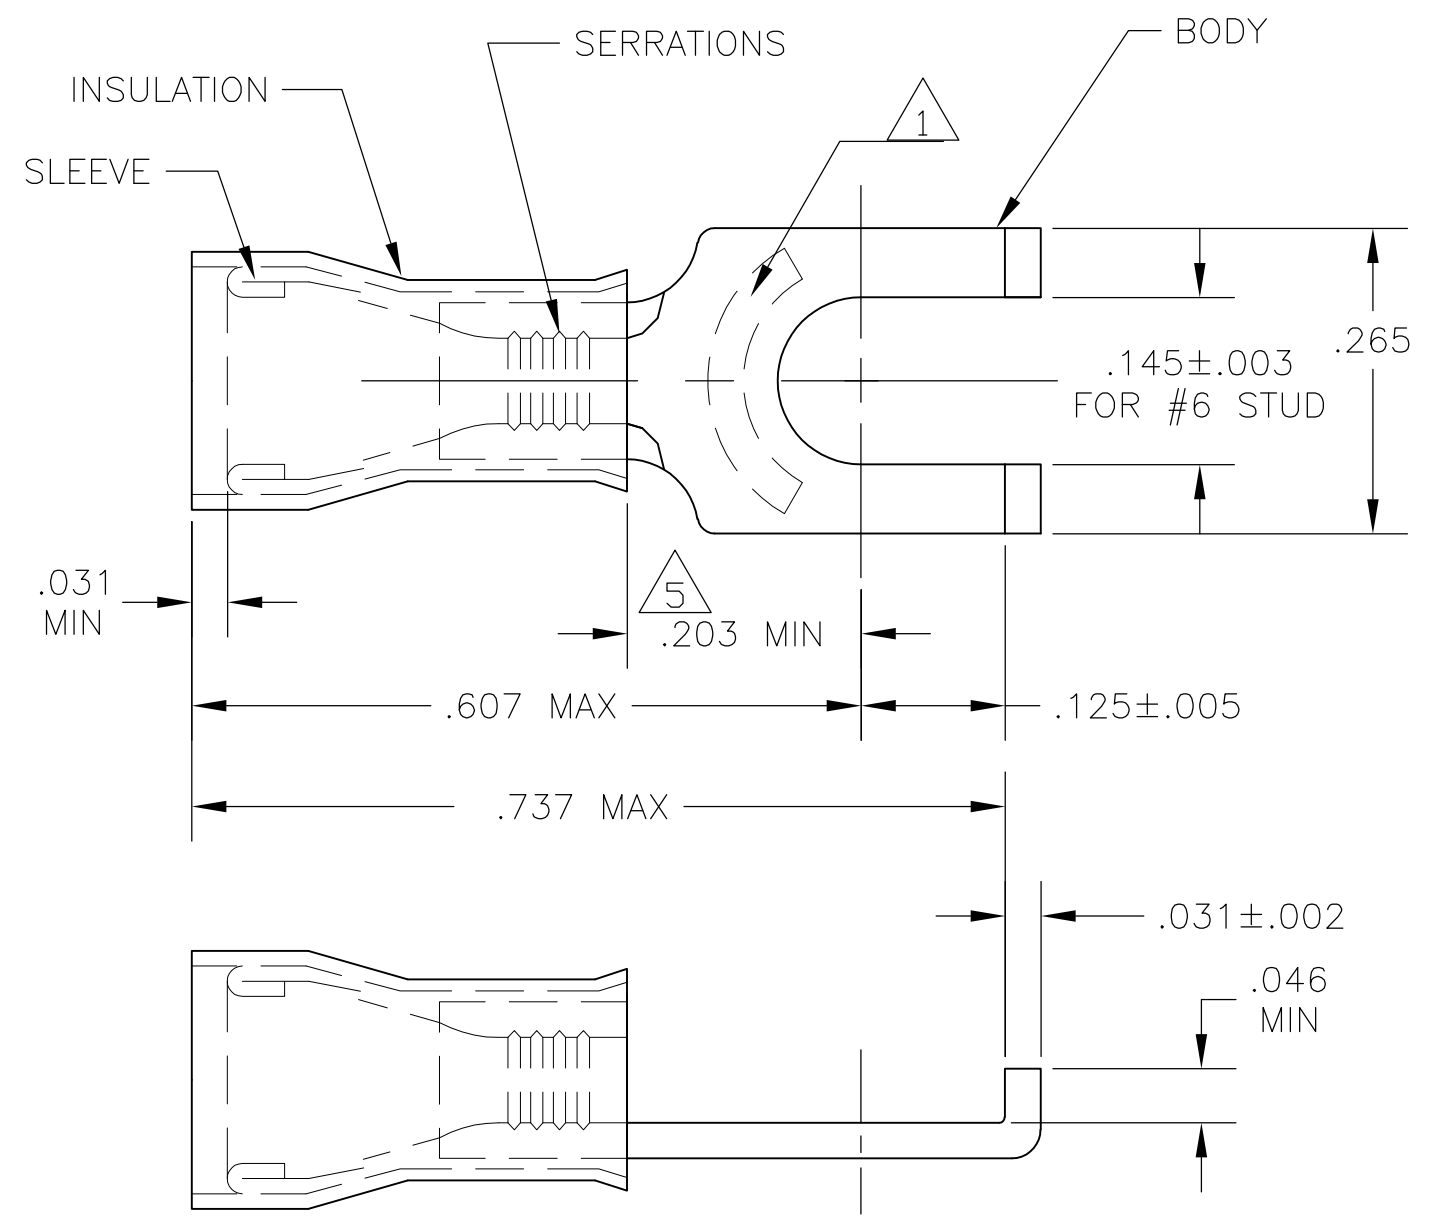

- ① STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC MIL-T-7928
COMMERCIAL WIRE RANGE IS 22-16
- ② MATERIAL: BODY - CU PER ASTM B152
SLEEVE - CU PER ASTM B152
INSULATION - NYLON
- ③ FINISH: BODY: TIN PER ASTM B-545
SLEEVE: TIN PER ASTM B-545
INSULATION - COLOR: RED
- ④ WIRE INSUL DIA .105-.140
- ⑤ APPLIES FROM EDGE OF METAL WIRE BARREL
TO CENTER OF STUD HOLE

| | | |
|-----|--------------|---------|
| -- | LOOSE PIECE | 322426 |
| QTY | PACKAGE TYPE | PART NO |

| | |
|---|--|
| AMP INCORPORATED CUSTOMER SERVICE SYSTEMS | |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER 1-800-522-6752 |
| FOR APPLICATION TOOLING INFORMATION | TOOLING ASSISTANCE CENTER 1-800-722-1111 |
| FOR ORDER ENTRY | 1-800-526-5142 |

| |
|--|
| MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] |
| VOLTAGE RATING: 300V MAX |
| CIRCULAR MIL AREA: 0.26-1.65mm² [509-3260] SOLID OR STRANDED |

| | |
|--|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | |
| DIMENSIONS: INCHES | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| | 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± 5' |
| MATERIAL | FINISH |
| ② | ③ |

| | |
|------------------------------------|---|
| DWN jr_ruth 11JUN09 | Tyco Electronics Corporation Harrisburg, PA 17105-3608 |
| CHK TOM MICHIELUTTI 11JUN09 | |
| APVD TOM MICHIELUTTI 11JUN09 | |
| NAME TOM MICHIELUTTI | |
| PRODUCT SPEC UL 486A | TERMINAL, P.I.D.G., FLANGED SPADE, WIRE SIZE: 22-16 |
| APPLICATION SPEC | |
| WEIGHT | SIZE A3 |
| CUSTOMER DRAWING | CAGE CODE 00779 |
| | DRAWING NO G-322426 |
| | RESTRICTED TO |
| | SCALE 6:1 |
| | SHEET 1 OF 1 |
| | REV D1 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)