
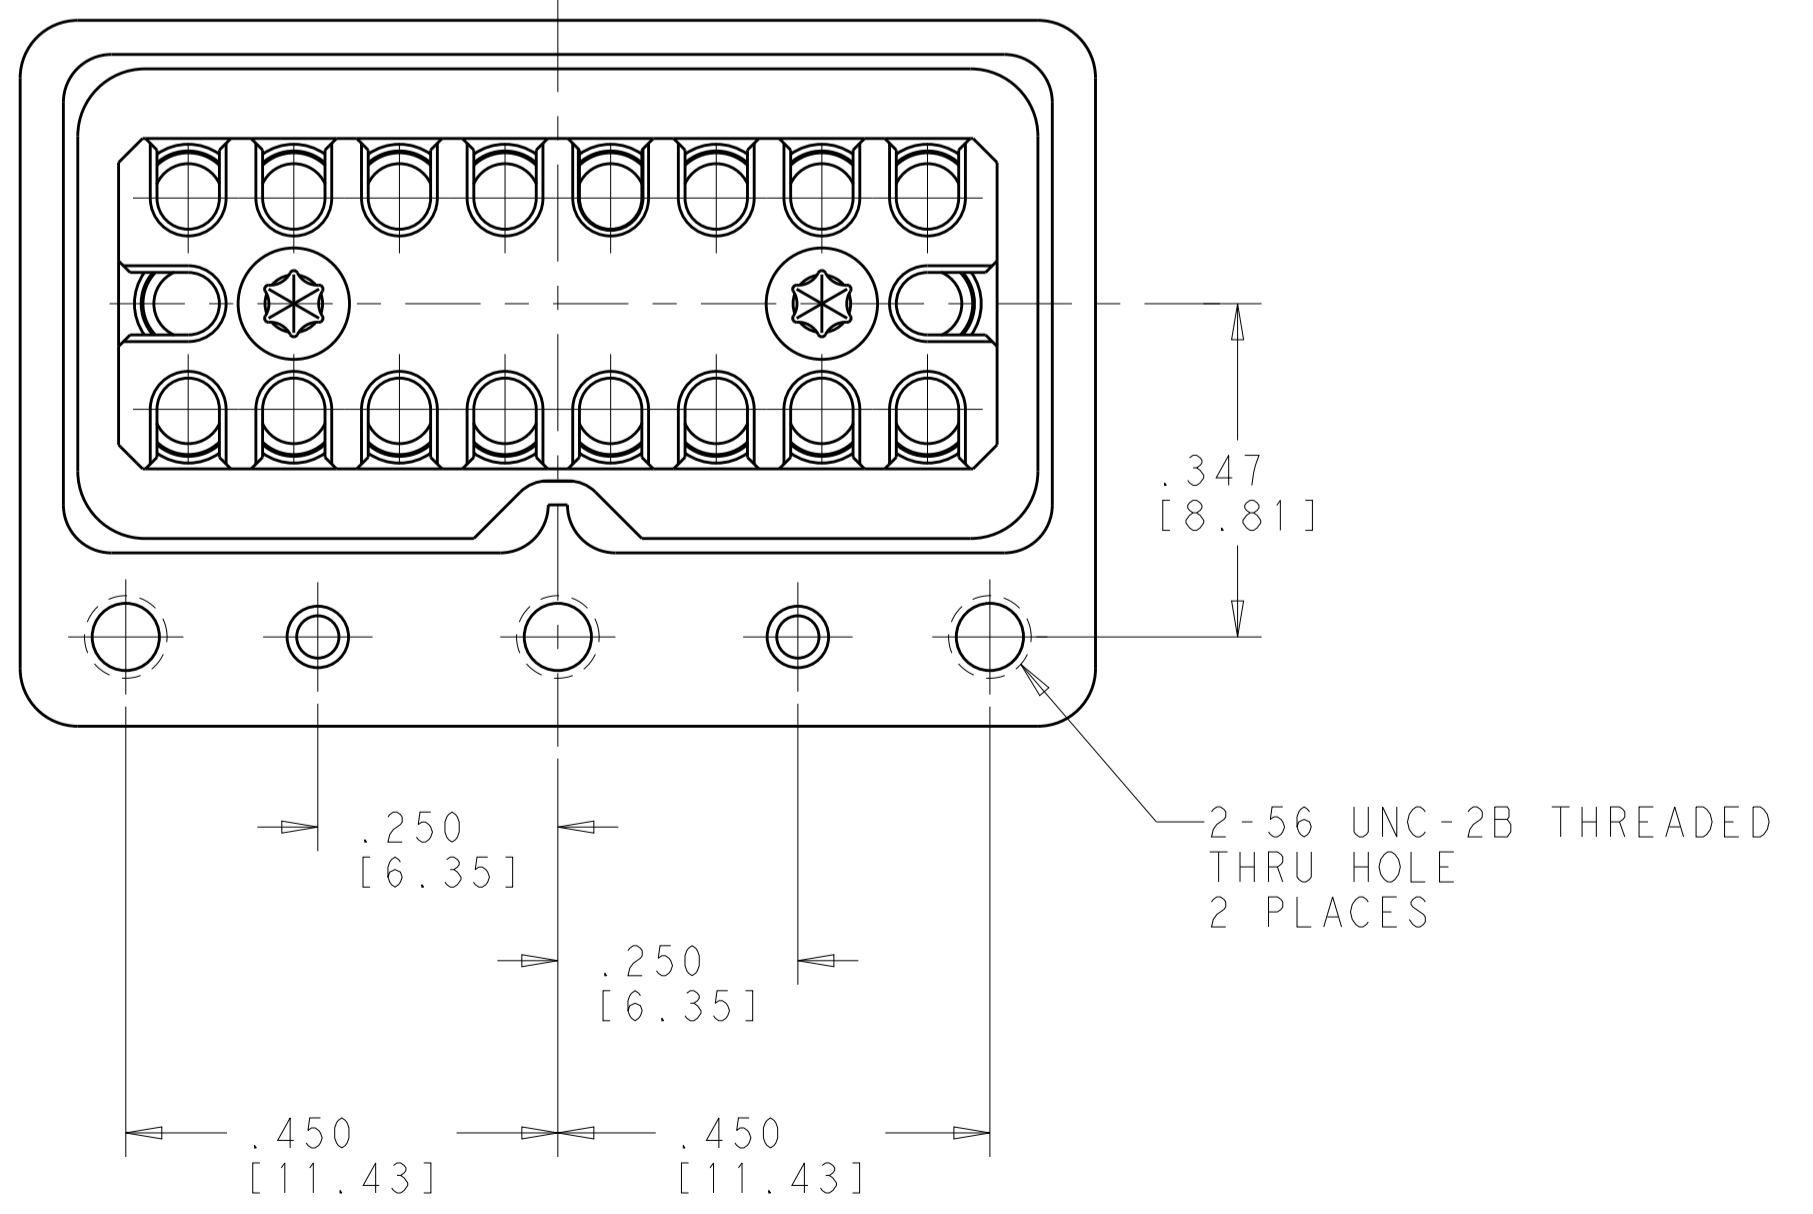
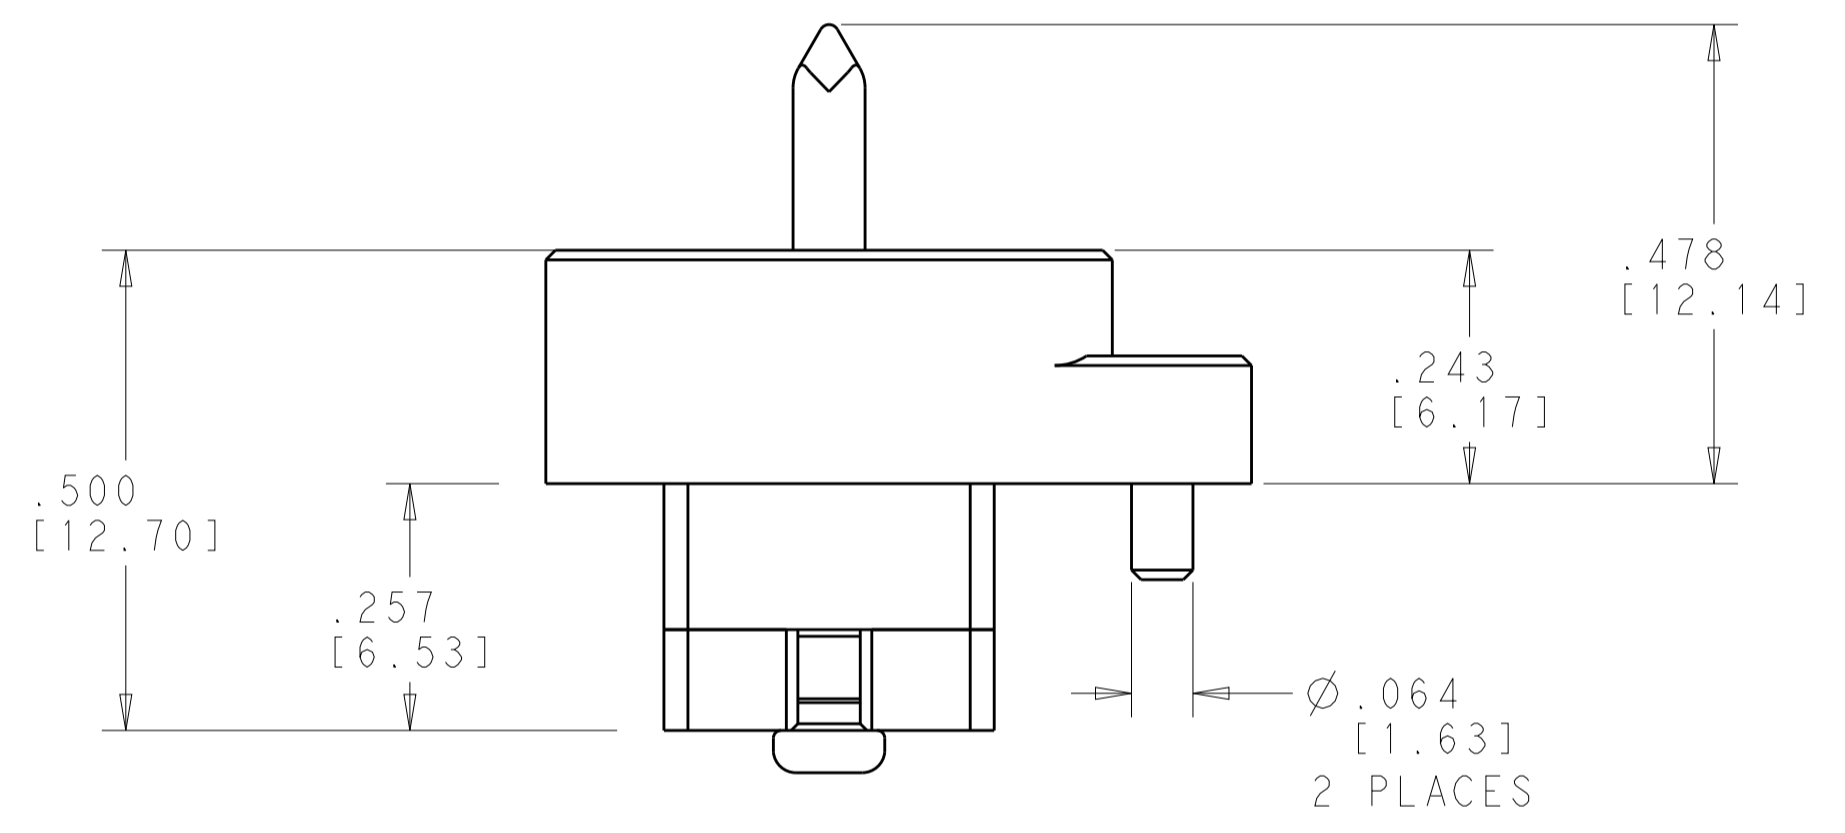
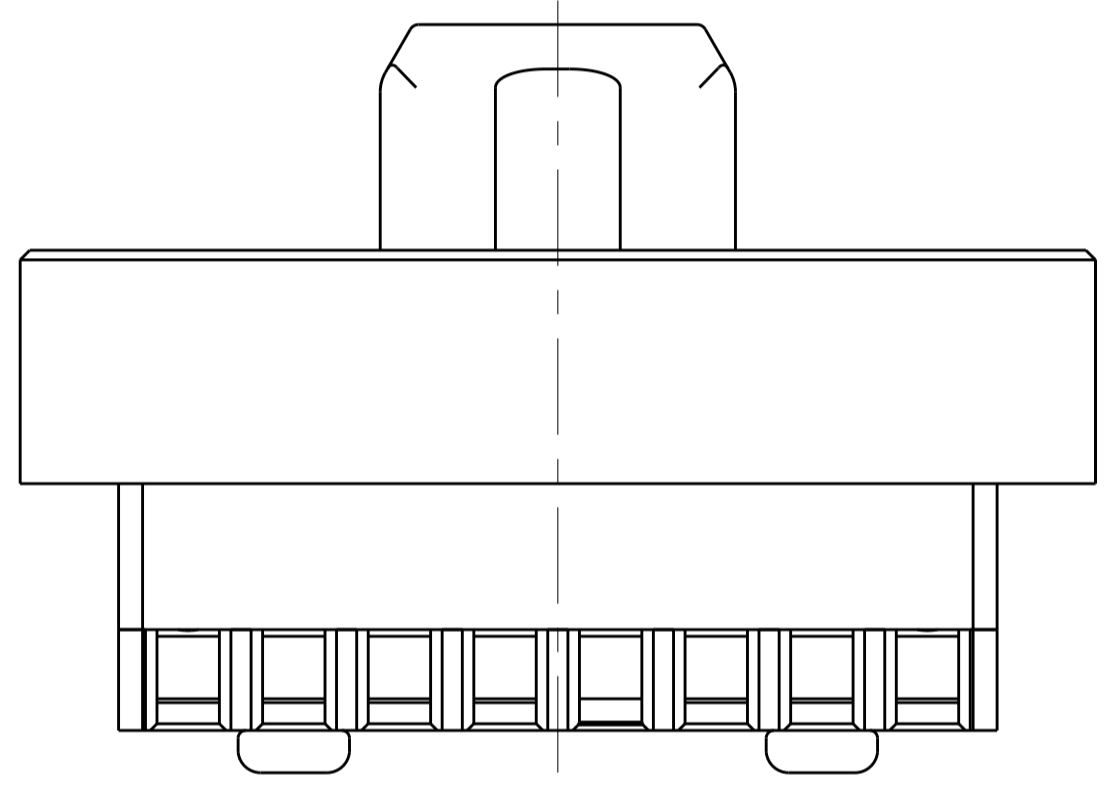
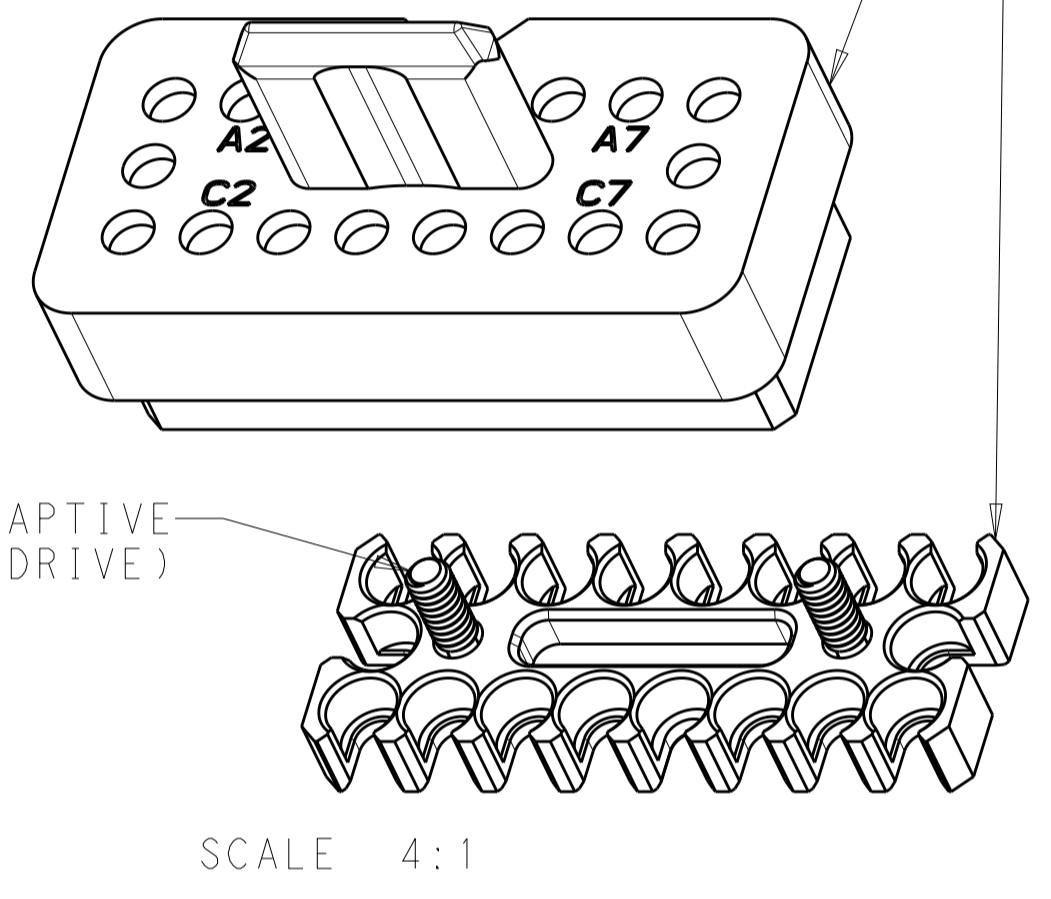
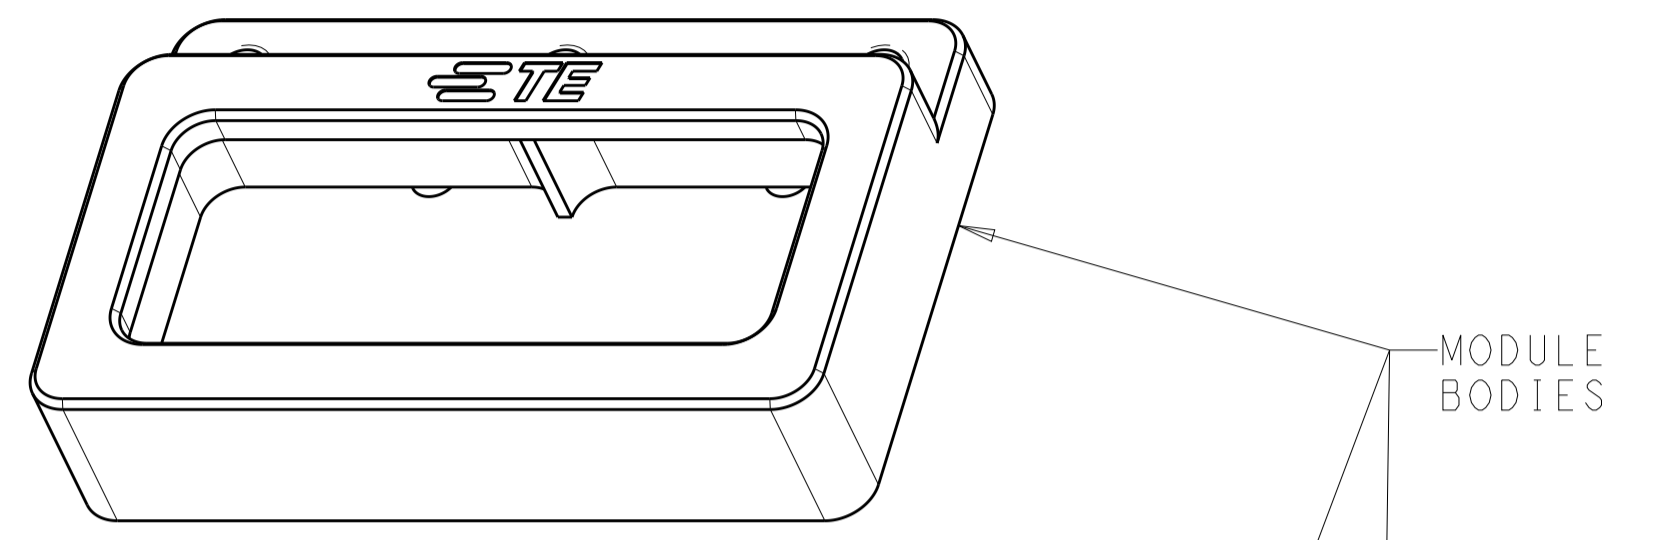
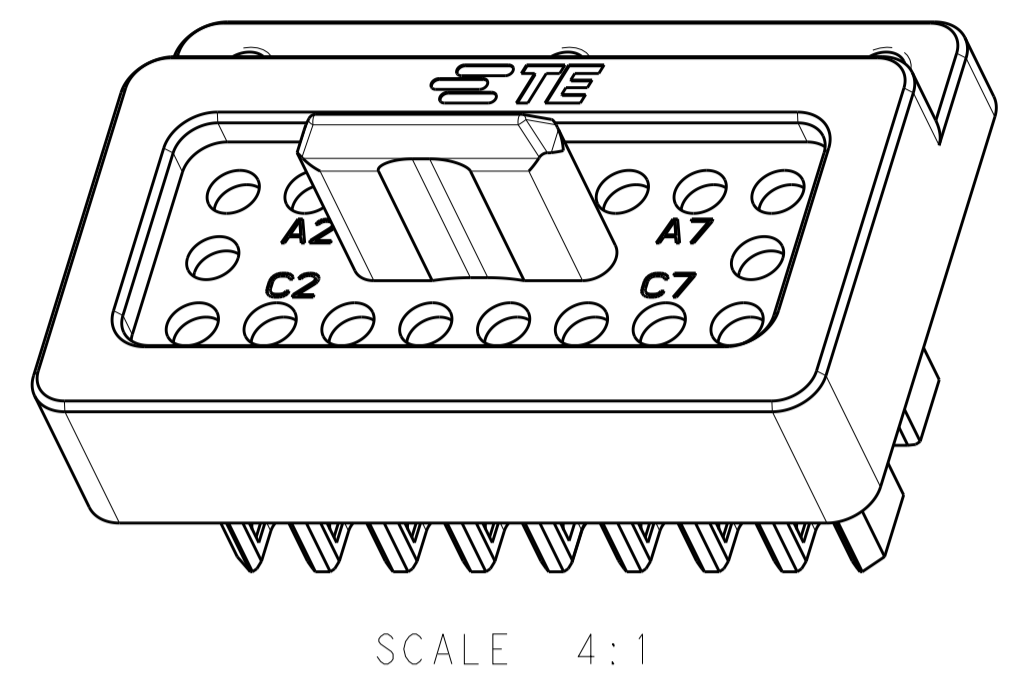


REVISIONS				
P.	LTR.	DESCRIPTION	DATE	APVD.
B		RELEASED PER ECO 19-005475	4-9-19	CT FB

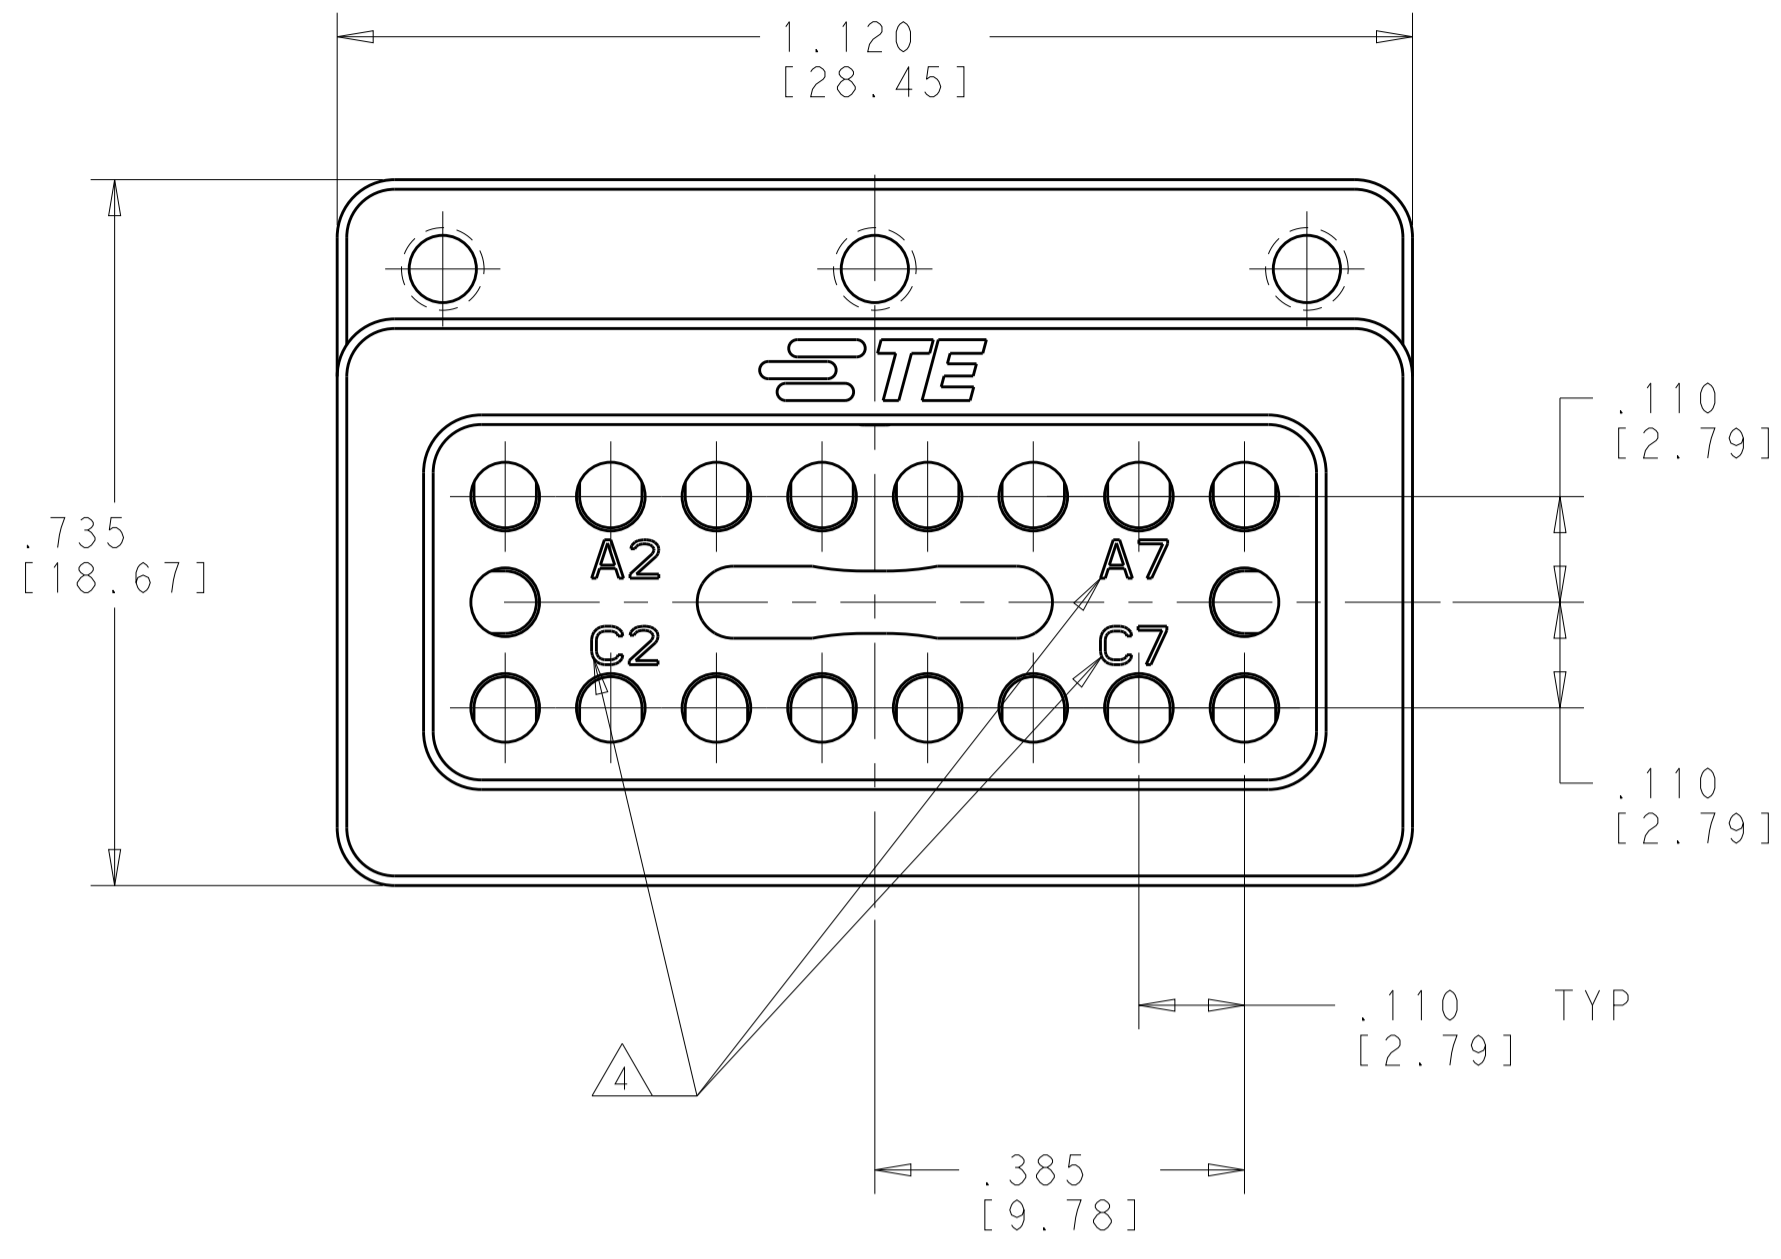


- 1 MATERIAL:
MODULE BODIES - SEE TABLE
SCREWS - 300 SERIES STAINLESS STEEL
- 2 FINISH:
MODULE BODIES - SEE TABLE
SCREWS AND GUIDE PIN - PASSIVATED
- 3. SHIPPED IN KIT FORM.
- 4 CIRCUIT IDENTIFICATION MARKING
- 5 J3 MODULE LOCATION CAN BE MOVED $-.129[3.28]$ TO POSITION J3 = $3.892[98.86]$ TO ALLOW FOR USE OF A FULL MULTIGIG CONNECTOR IN J4. THE DAUGHTERCARD MODULE POSITION MUST ALSO BE ADJUSTED ACCORDINGLY.

CLEAR CHROMATE CONVERSION COATING	ALUMINUM ALLOY 7075	2322337-2
PASSIVATED	STAINLESS STEEL PER UNS S30300	2322337-1
MODULE FINISH 2	MODULE MATERIAL 1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: R. MILLER 30JUN2017	TE Connectivity
DIMENSIONS: INCHES/mm		CHK: D. WILSON 30JUN2017	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: K. DOWNHOWER 11APR2018	NAME: 18 POSITION NanoRF MODULE P.C.B. MOUNT - BACKPLANE VITA
0 PLC ±		PRODUCT SPEC	
1 PLC ±		108-163006	SIZE: CAGE CODE DRAWING NO RESTRICTED TO
2 PLC ±		APPLICATION SPEC	
3 PLC ±.005[0.13]		408-163016	A 00779 C=2322337
4 PLC ±		WEIGHT	
ANGLES ±		CUSTOMER DRAWING	SCALE: 5:1 SHEET 1 OF 2 REV B

REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
-	SEE SHEET 1			

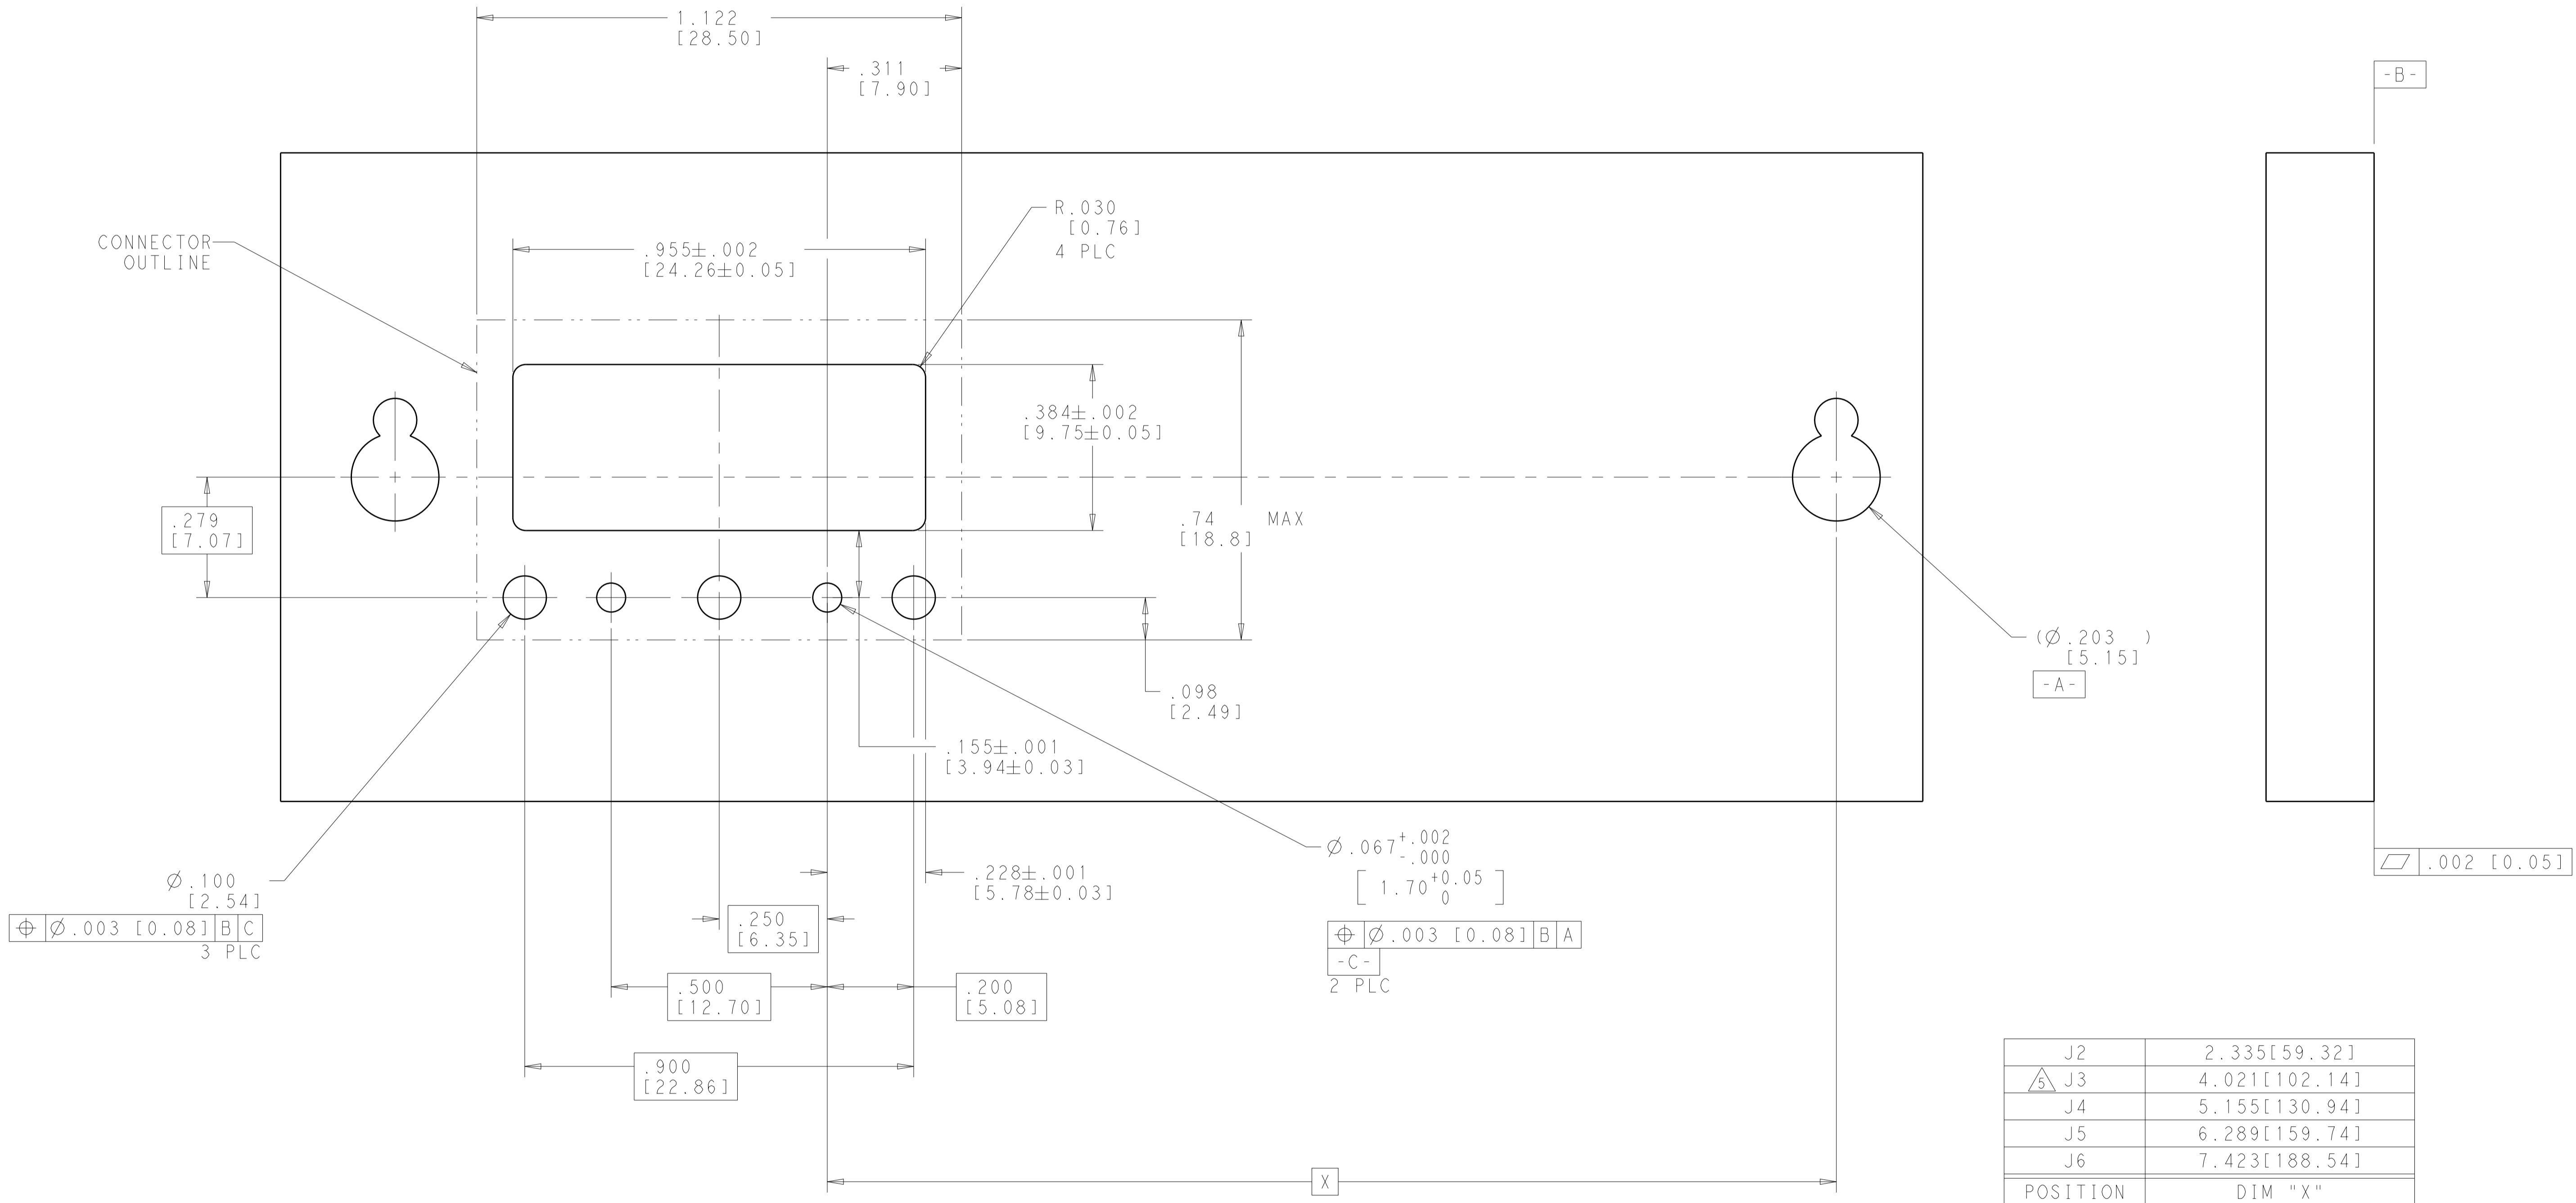

J2	2.335[59.32]
J3	4.021[102.14]
J4	5.155[130.94]
J5	6.289[159.74]
J6	7.423[188.54]
POSITION	DIM "X"

TYP PCB LAYOUT - VIEWED FROM BACKSIDE OF BACKPLANE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. MILLER 30JUN2017 CHK: D. WILSON 30JUN2017 APVD: K. DOWNHOWER 11APR2018	TE Connectivity
DIMENSIONS: INCHES/mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.005[0.13] 4 PLC ± ANGLES ± FINISH ±	NAME: 18 POSITION NanoRF MODULE PRODUCT SPEC: 108-163006 APPLICATION SPEC: 408-163016 WEIGHT: -	
MATERIAL: NOTE 1	NOTE 2	CUSTOMER DRAWING	RESTRICTED TO SCALE: 5:1 SHEET 2 OF 2 REV B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)