


SECTION X-X
ROTATED 90° CW

- ① THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ② POSTS:
GOLD FLASH OVER
PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL ON THE MATING SURFACES,
.000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
.000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
OR
.000030 MIN GOLD PLATE ON THE MATING SURFACES,
.000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
.000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- ③ DOUBLE BAR POLARIZATION
- ④ CENTER POLARIZATION SLOT
- ⑤ FOR 10 POSN ASSEMBLY, SLOT OMITTED WHERE INDICATED
- ⑥ OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE). LOCATION APPROXIMATELY WHERE SHOWN.
- ⑦ NUMBER 1 POSITION.
- ⑧ HOUSING: GLASS FILLED NYLON, FLAME RETARDENT, BLACK.
- ⑨ POSTS: BRASS

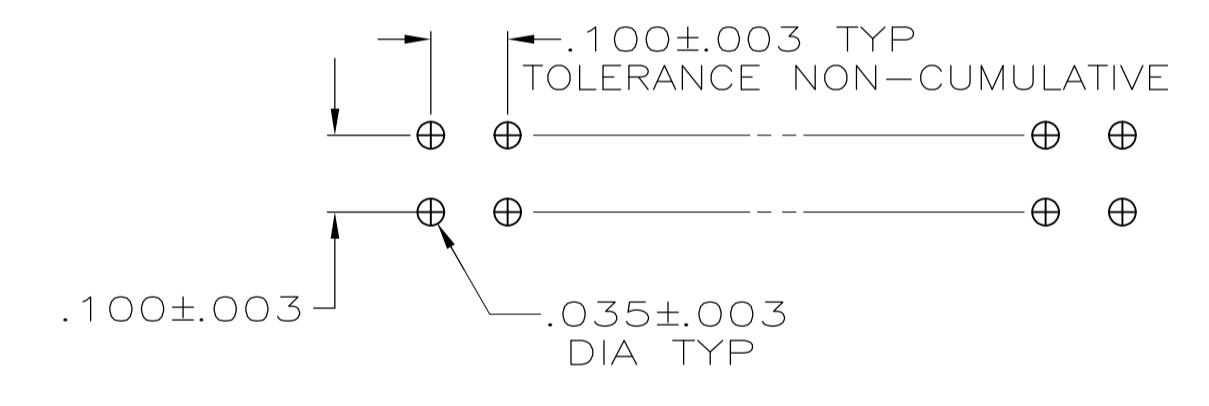

RECOMMENDED HOLE LAYOUT
FOR MANUAL INSERTION

OBSOLETE	1.800	1.400	14	30	1-104313-2
OBSOLETE	3.300	2.900	29	60	1-104313-0
OBSOLETE	2.800	2.400	24	50	104313-9
OBSOLETE	2.500	2.100	21	44	104313-8
	2.300	1.900	19	40	104313-7
	2.000	1.600	16	34	104313-6
	1.600	1.200	12	26	104313-5
	1.300	.900	9	20	104313-4
	1.100	.700	7	16	104313-3
	1.000	.600	6	14	104313-2
	.800	.400	4	10	104313-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWG. CHK	DOUTY
0 PLC ± -	1 PLC ± -	APVD	
2 PLC ± -	3 PLC ± .005	NAME	
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	108-40018
		APPLICATION SPEC	
MATERIAL	FINISH	SIZE	CAGE CODE
8/9	2	A1	00779
		DRAWING NO	104313
		WEIGHT	
		CUSTOMER DRAWING	SCALE 4:1

STE TE Connectivity
HEADER ASSY, LOW PROFILE, AMP-LATCH
RESTRICTED TO

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)