

SPECIFICATION CONTROL DRAWING


55PC2143

TITLE FOUR CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT

Date 10-05-99

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

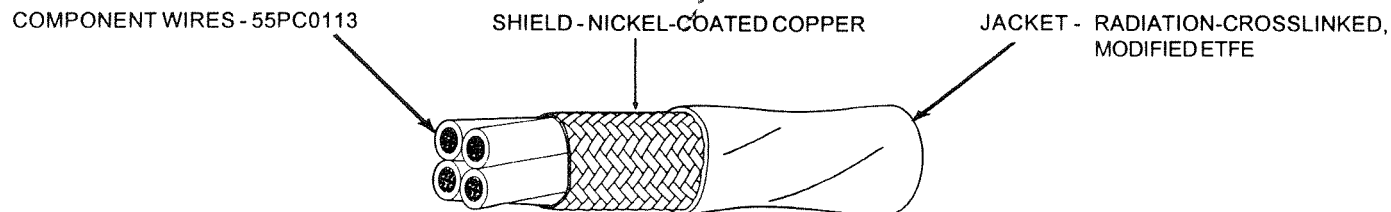

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC2143-26-*	26	.0015	.0065	.0085	.089	.102	.115	8.44	9.02
55PC2143-24-*	24	.0015	.0065	.0085	.100	.115	.131	11.36	12.07
55PC2143-22-*	22	.0015	.0070	.0090	.115	.131	.148	15.63	16.39
55PC2143-20-*	20	.0015	.0070	.0090	.133	.152	.172	22.25	23.18
55PC2143-18-*	18	.0015	.0075	.0095	.154	.177	.201	32.18	33.41
55PC2143-16-*	16	.0015	.0075	.0095	.172	.197	.222	40.08	41.50
55PC2143-14-*	14	.0015	.0080	.0100	.204	.235	.266	59.69	61.52
55PC2143-12-*	12	.0015	.0085	.0110	.247	.285	.323	89.60	91.91
55PC2143-10-*	10	.0015	.0085	.0110	.305	.352	.400	139.71	143.20

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 22, red, blue, yellow and green component wires; white jacket:
 55PC2143-22-2/6/4/5-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

300 Constitution Drive
 Menlo Park, California 94025
 1-800-2 Raychem Fax: 1-650-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)