

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
A3	ECR-15-007632		25MAY2015	DW	CW
B	ECR-15-014907		14OCT2015	DL	CW
B1	ECR-16-011987		08NOV2016	QY	CW
C	ECR-21-108559		06AUG2021	BS	CW

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:


- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩 0.5Nm

M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩 1.2Nm

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

TYPE 1, T2050462201-000, WITH TE LOGO
类型 1, T2050462201-000, TE LOGO


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11JUN2014 David Wang		 TE Connectivity	
DIMENSIONS: mm		CHK 11JUN2014 Chris Wang			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 11JUN2014 Xiang Xu		NAME HEE-046-F	
0 PLC ±-		PRODUCT SPEC 108-106137		SIZE	
1 PLC ±-		APPLICATION SPEC 114-106137		CAGE CODE	
2 PLC ±-		WEIGHT		DRAWING NO	
3 PLC ±-		Customer Drawing		A300779	
4 PLC ±-		SCALE 1:1		SHEET 1 OF 2	
ANGLES ±-		RESTRICTED TO		REV C	
FINISH		-		-	
MATERIAL		-		-	

1470-19 (3/13)

Downloaded From Oneyac.com




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

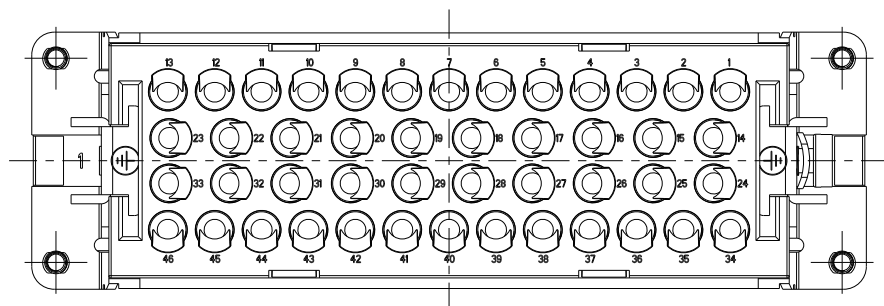


NOTE:
ALL SPEC REFER TO TYPE 1



注释:
所有产品规范参照 TYPE 1

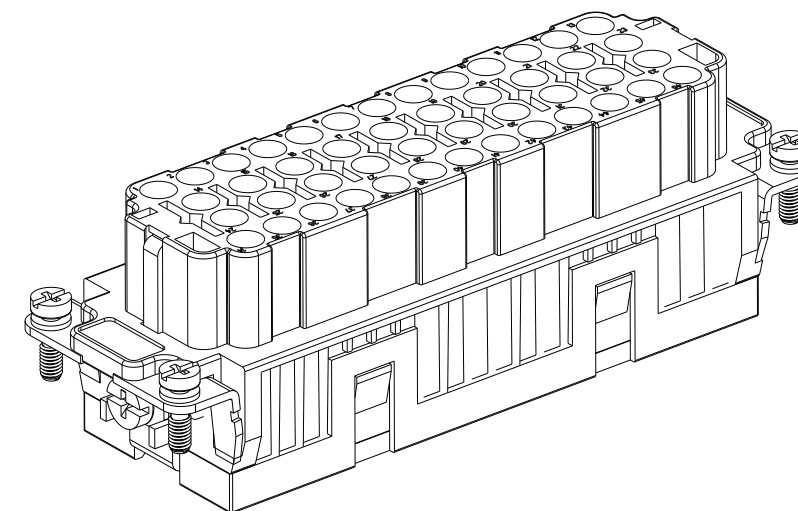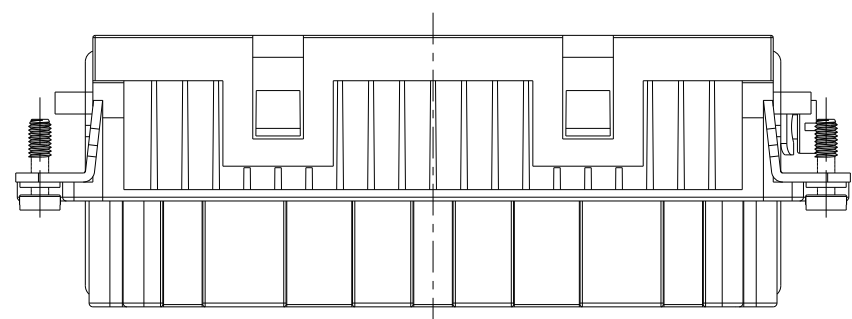

TYPE-2, T2050462201-002, WITH STAINLESS STEEL SCREW, WITHOUT LOGO
类型-2, T2050462201-002, 带不锈钢螺丝, 无LOGO

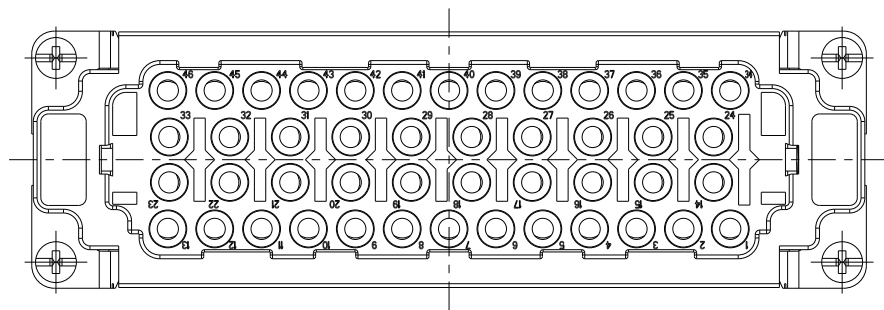

T2050462201-002	HEE-046-F	HEE-046 FEMALE INSERT, WITH STAINLESS STEEL SCREW, WITHOUT LOGO HEE-046 母插, 带不锈钢螺丝, 无LOGO	TYPE-2 类型-2
T2050462201-000	HEE-046-F	HEE-046 FEMALE INSERT HEE-046 母插	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11JUN2014 David Wang	 TE Connectivity				
DIMENSIONS: mm		CHK 11JUN2014 Chris Wang			NAME HEE-046-F		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 11JUN2014 Xiang Xu			PRODUCT SPEC 108-106137		
 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		APPLICATION SPEC 114-106137	SIZE A3	CAGE CODE 00779	DRAWING NO T2050462201000	RESTRICTED TO -	
MATERIAL -		WEIGHT -	Customer Drawing		SCALE 1:1	SHEET 2 OF 2	REV C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)