

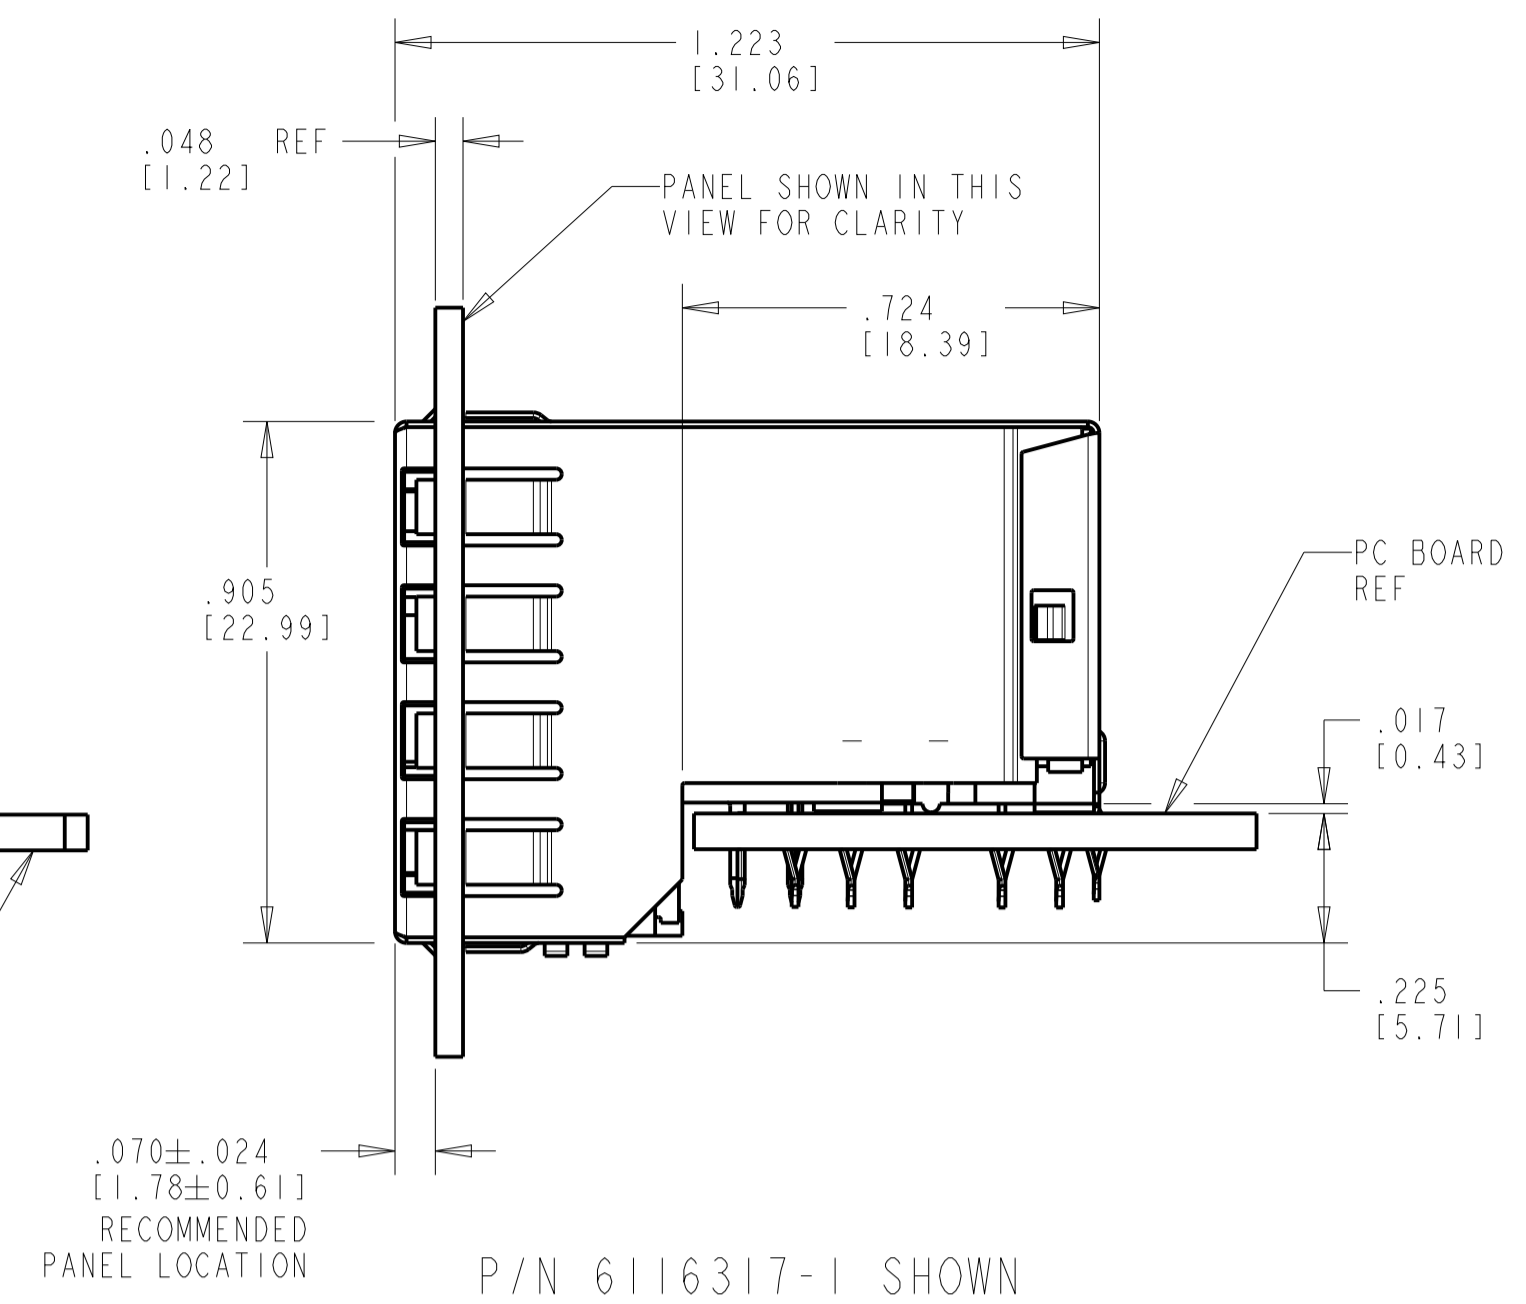
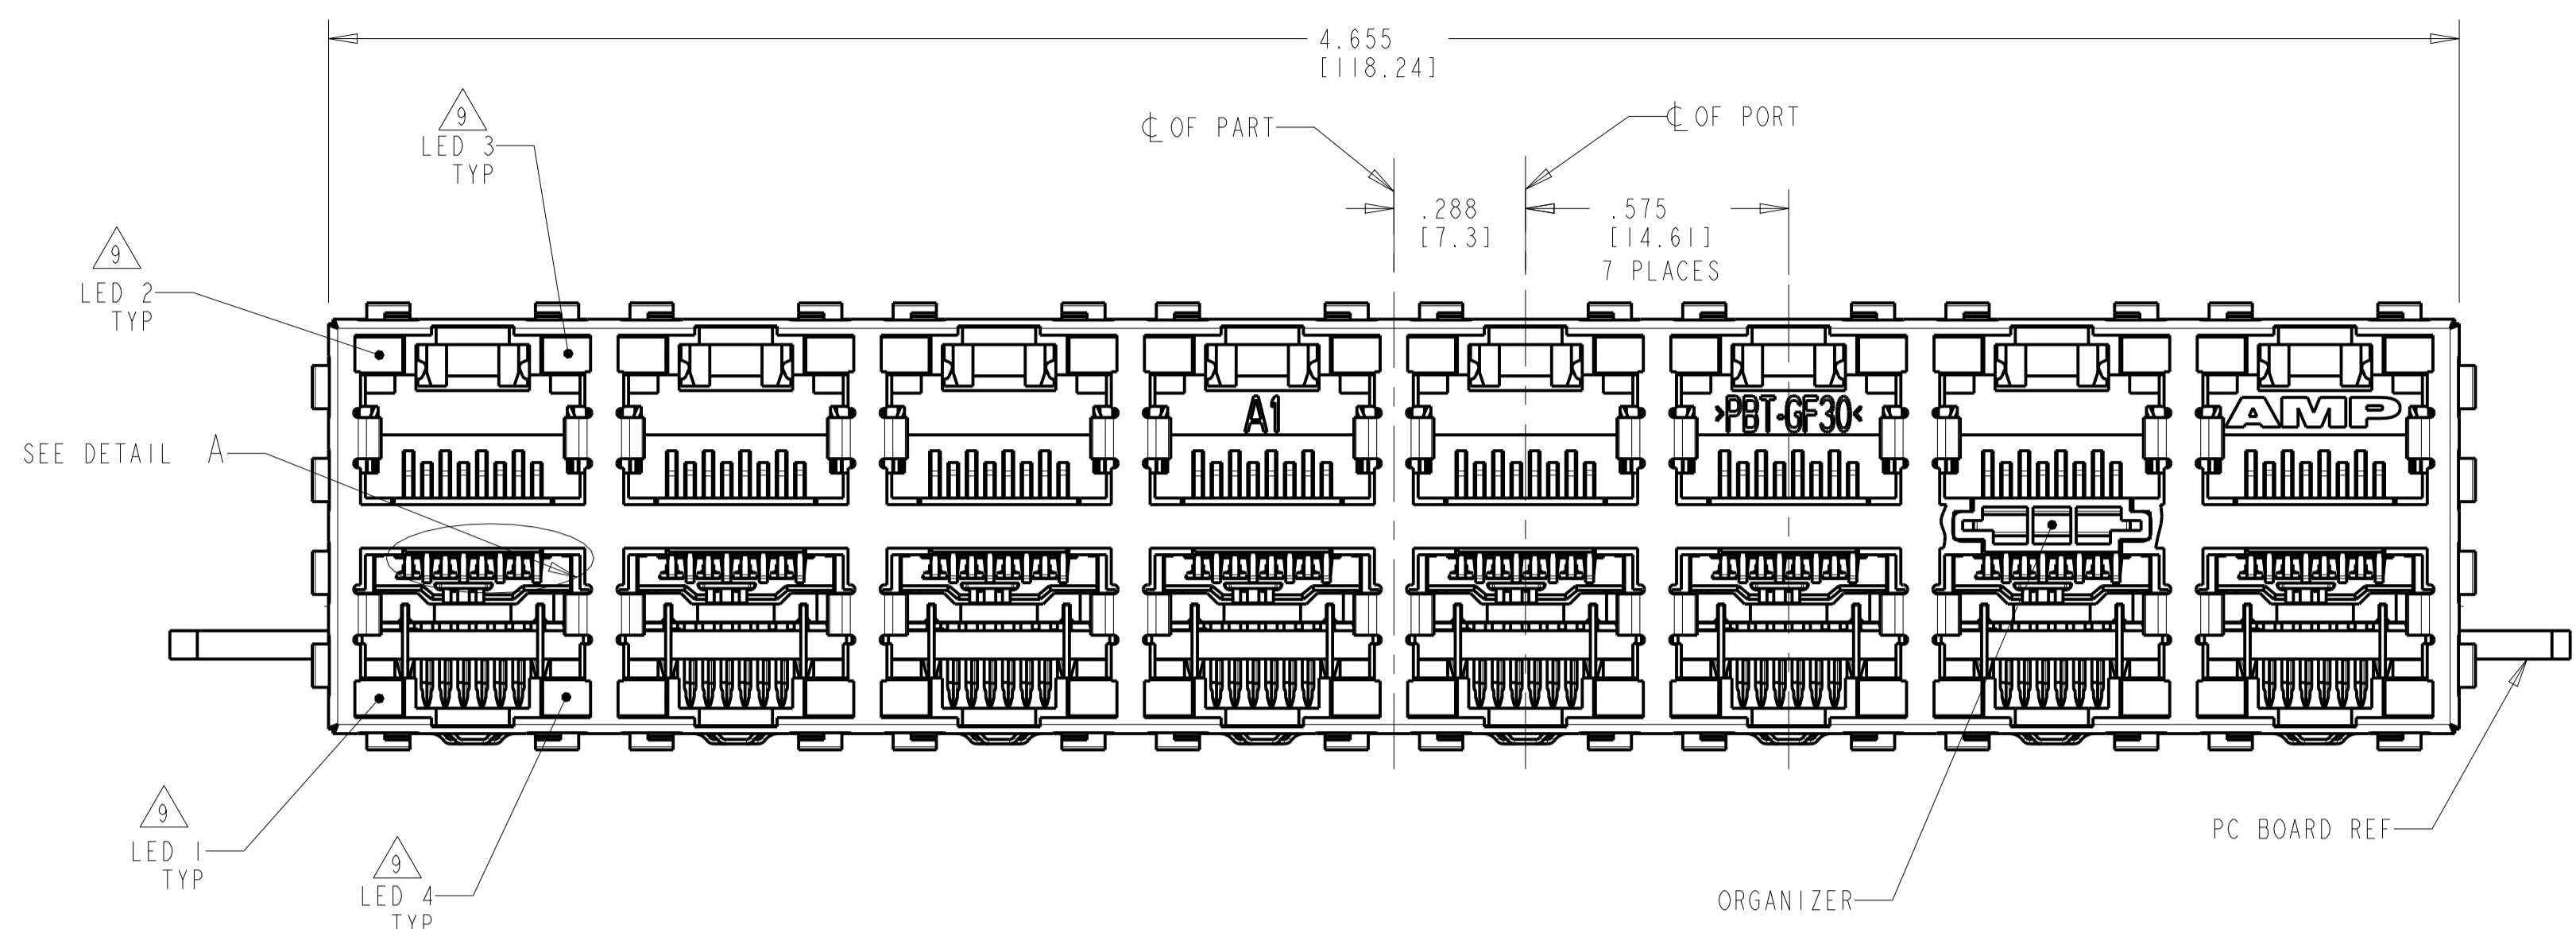
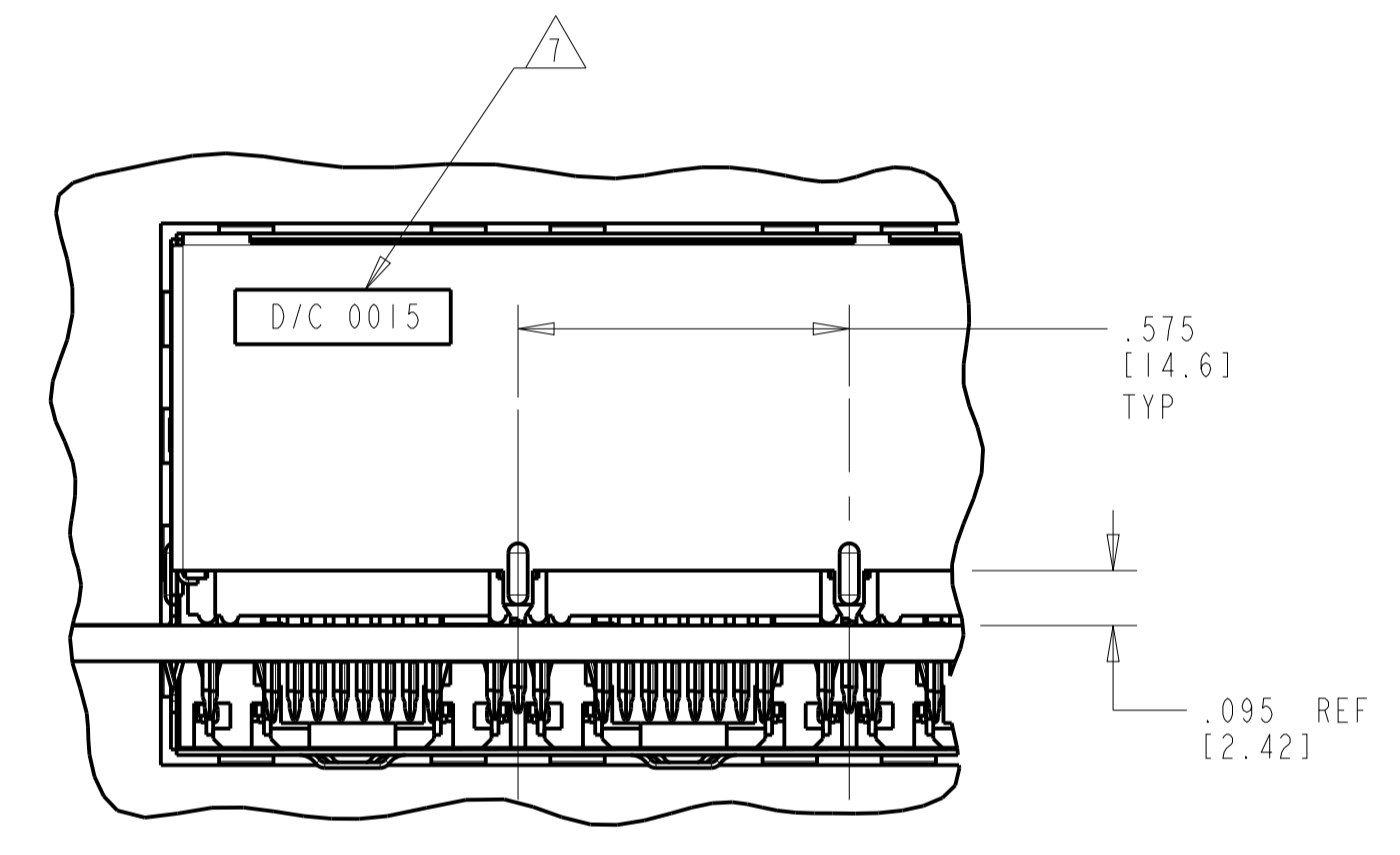


LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	OWN	APVD
AA	22						
		C2		REVISED PER ECO-11-005033	04MAY11	RK	HMR
		D		ECO-15-006810	22JAN2016	LL	SH
		D1		REVISED PER ECO-21-000623	28JUL2020	IT	SH



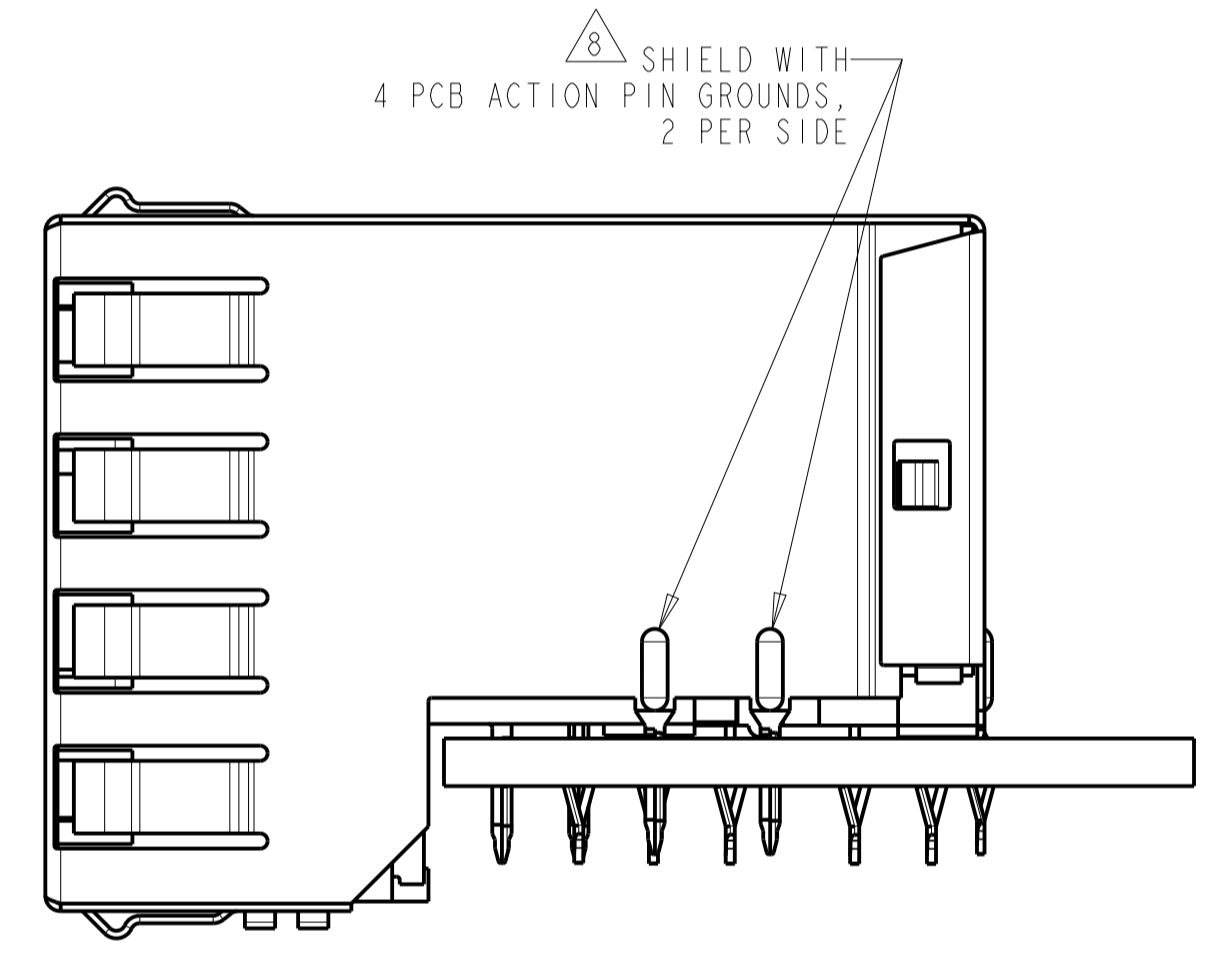


- △ HOUSING: PBT POLYESTER, BLACK, UL 94V-0.
 - TERMINALS: 0.30 THICK PHOS BRONZE PLATED WITH 1.27µm MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 2µm MINIMUM THICK MATTE TIN IN ACTION PIN COMPLIANT PIN TERMINAL AREA OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
 - SHIELD: 0.25 THICK COPPER ALLOY PLATED WITH 1.27µm MINIMUM NICKEL.
 - GROUND CLIPS: 0.25 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
 - LIGHT EMITTING DIODE (LED): DIFFUSED EPOXY LENS, 12.95 CARBON STEEL WIREFRAME LEADS PLATED WITH 8.89µm TIN/COPPER OVER 2.03µm SILVER OVER 1.02µm COPPER OVER 3.56µm NICKEL OVER 1.02µm COPPER UNDERPLATE.
 - LED ACTION PIN COMPLIANT PIN CONTACTS: 0.30 THICK BRASS PLATED WITH 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
 3. ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
 4. TWO LEDS PER PORT, SIZE .079 X .118, SEE TABLE.
 - △ 5. DRILLED HOLE DIA = .040±.001. COPPER THICKNESS = .001-.003. TIN THICKNESS = .0003 MIN.
 - △ 6. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
 - △ 7. DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN.
 - △ 8. THESE FOUR SIDE PCB ACTION PIN GROUNDS AND CORRESPONDING PCB HOLES ARE REQUIRED ONLY ON 6116317-2, 6116317-3, 6116317-5, 6116317-6, 6116317-7,-9 AND 1--0.
 - △ 9. SUGGESTED OPERATING CURRENT FOR LEDS IS 20 mA.

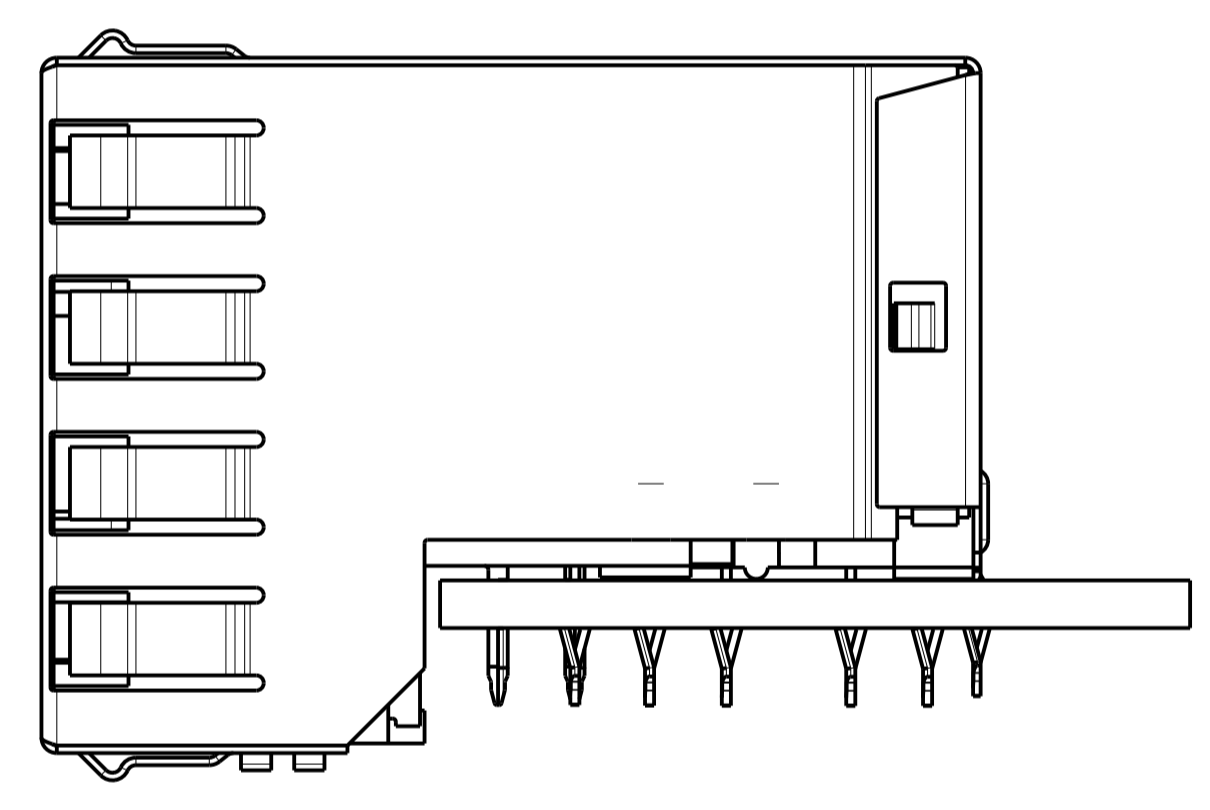

PARTIAL BACK VIEW

RED/GREEN	RED/GREEN	RED/GREEN	RED/GREEN	1-6116317-0
GREEN/YELLOW	GREEN/YELLOW	RED/GREEN	RED/GREEN	6116317-9
GREEN/YELLOW	GREEN/YELLOW	RED/GREEN	RED/GREEN	6116317-8
GREEN	GREEN	YELLOW	YELLOW	6116317-7
YELLOW	YELLOW	GREEN	GREEN	6116317-6
GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	6116317-5
GREEN	GREEN	GREEN	GREEN	6116317-4
GREEN	GREEN	GREEN	GREEN	6116317-3
GREEN	GREEN	GREEN	GREEN	6116317-2
GREEN	GREEN	GREEN	GREEN	6116317-1
LED #4 (LOWER-RIGHT)	LED #3 (UPPER-RIGHT)	LED #2 (UPPER-LEFT)	LED #1 (LOWER-LEFT)	PART NO.

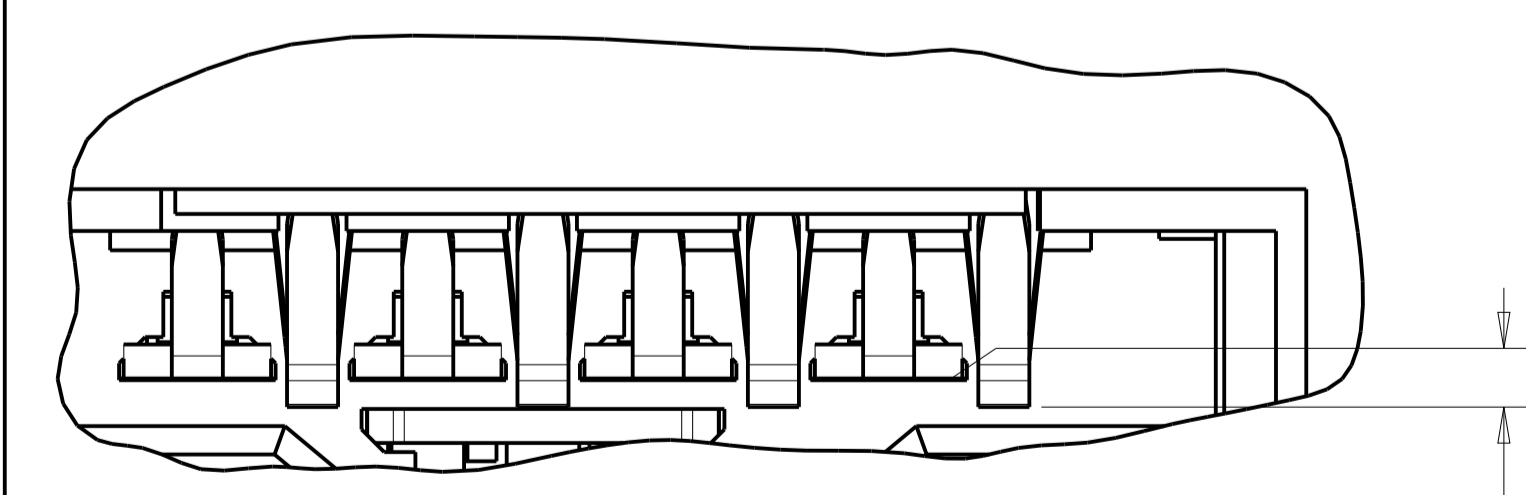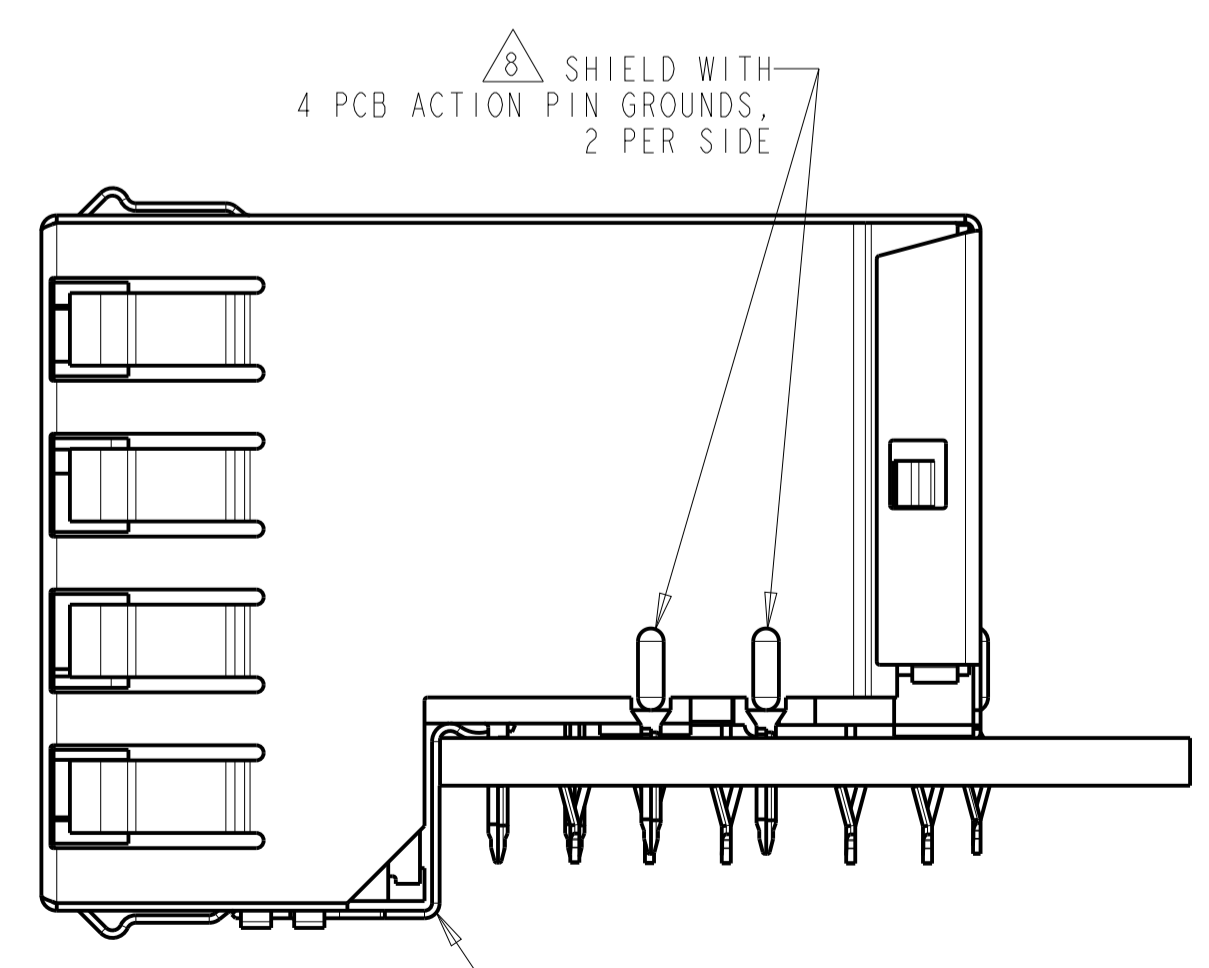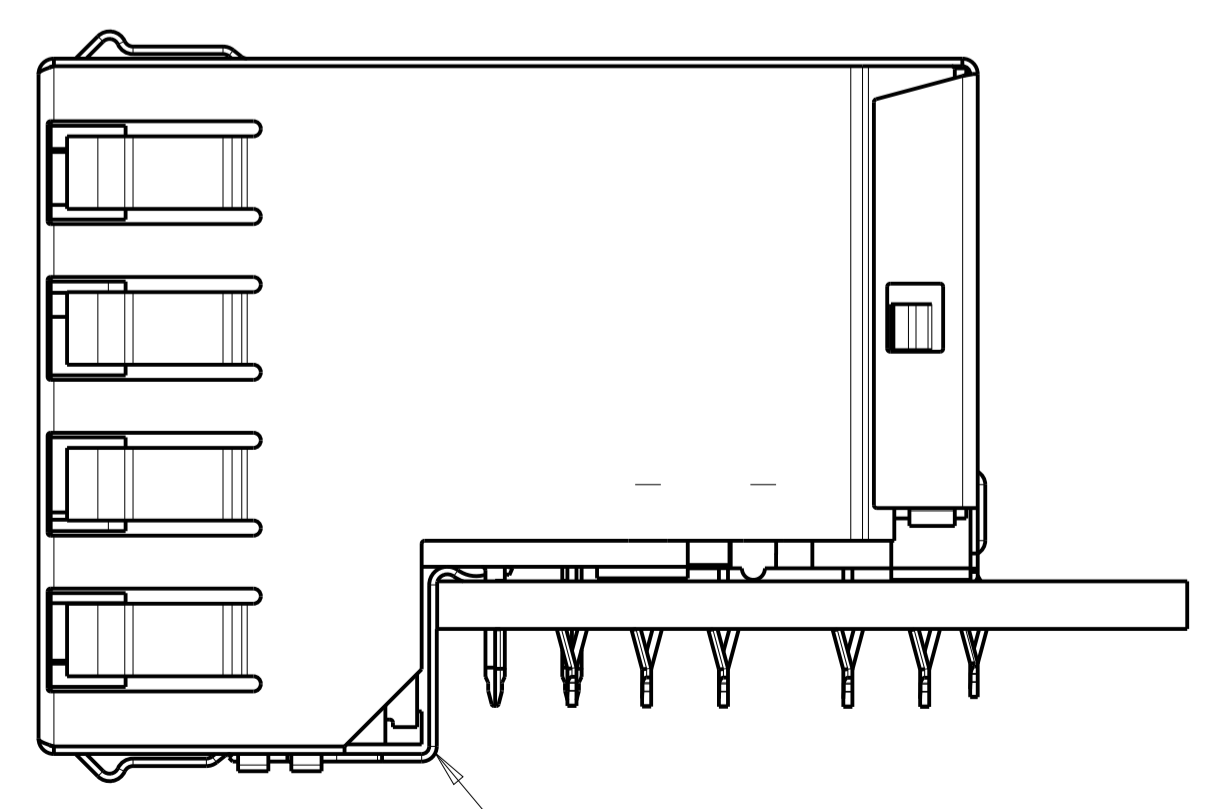


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES(mm)	TOLERANCES UNLESS OTHERWISE SPECIFIED:	OWN: L. VARELA - DOCKS CHK: J. WESTMAN APVD: S. FLICKINGER	23 JUN 2005 23 JUN 2005 23 JUN 2005
0 PLC ±	1 PLC ±	PRODUCT SPEC	NAME: STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEDS, 8 POSITION, SHIELDED PANEL GROUND, OFFSET, CAT 5
2 PLC ±	3 PLC ±	APPLICATION SPEC	SIZE: CAGE CODE DRAWING NO. RESTRICTED TO
4 PLC ±	ANGLES ±	114-2160	WEIGHT: 1 = 77.2 grams
MATERIAL	FINISH	114-2160	00779 ©=6116317
CUSTOMER DRAWING		SCALE: 3:1	SHEET 1 OF 3 REV D1


TE Connectivity

LOC	DIST	REV	DATE	BY	APPV
AA	22				


REVISIONS					
REV	DATE	BY	APPV	DESCRIPTION	DATE
-	-	-	-	SEE SHEET 1	-

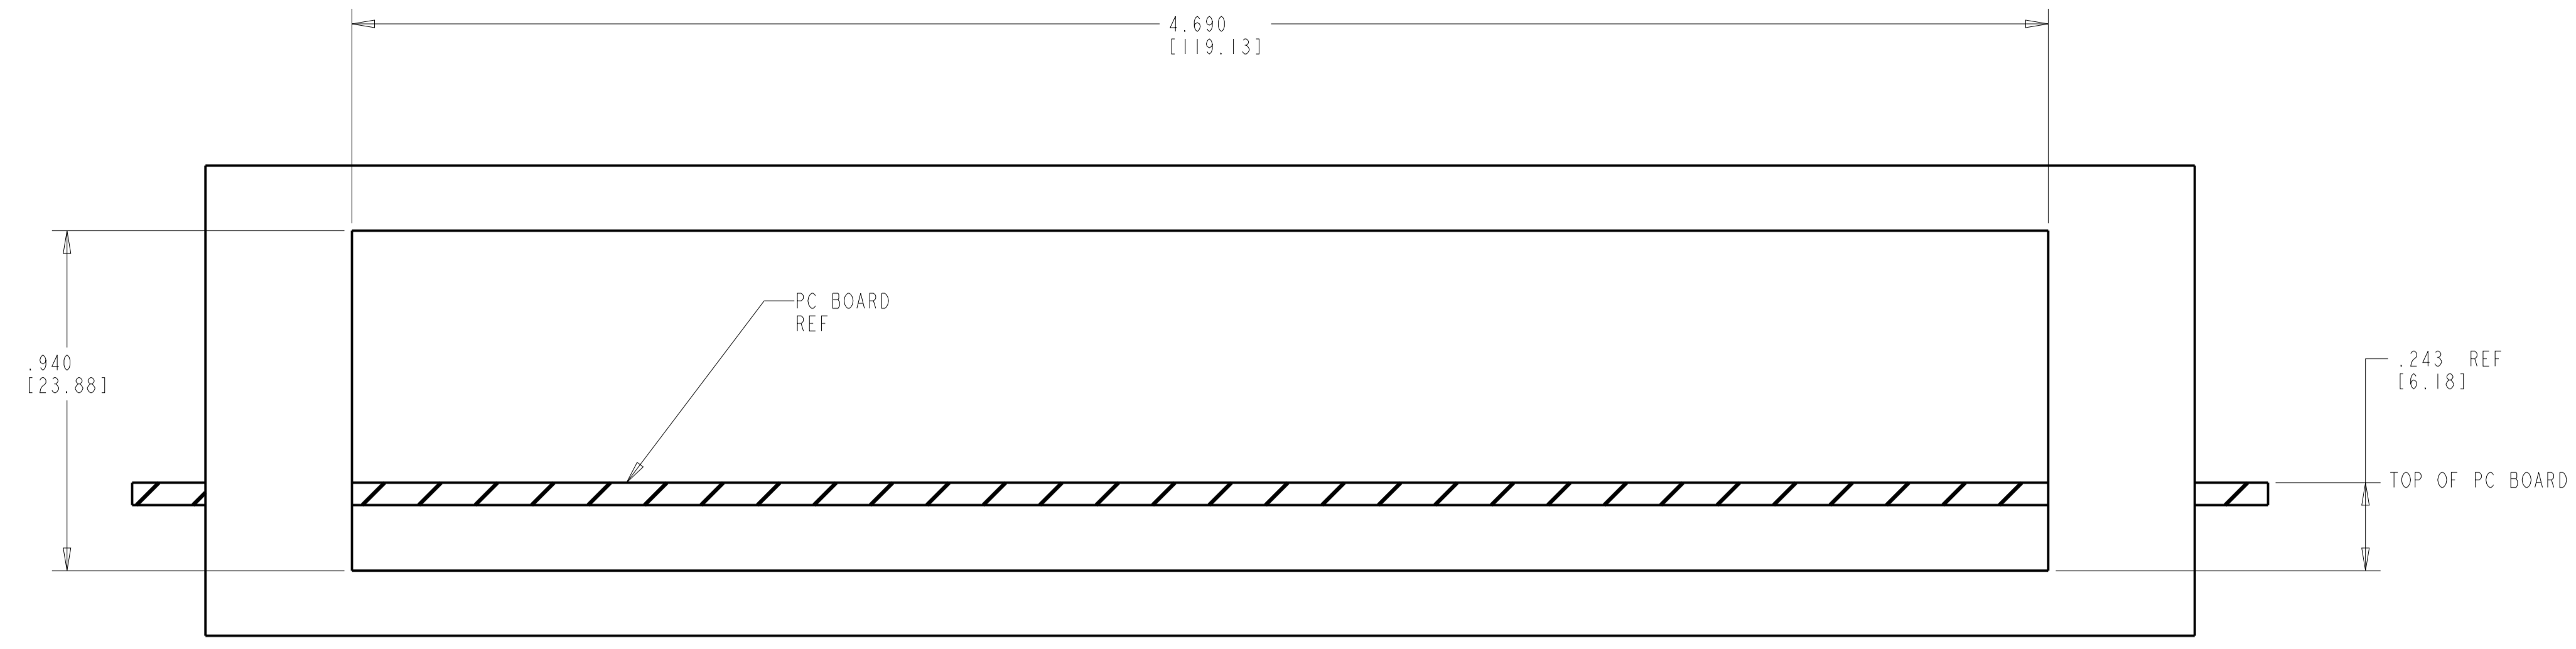

RECOMMENDED PANEL CUT-OUT

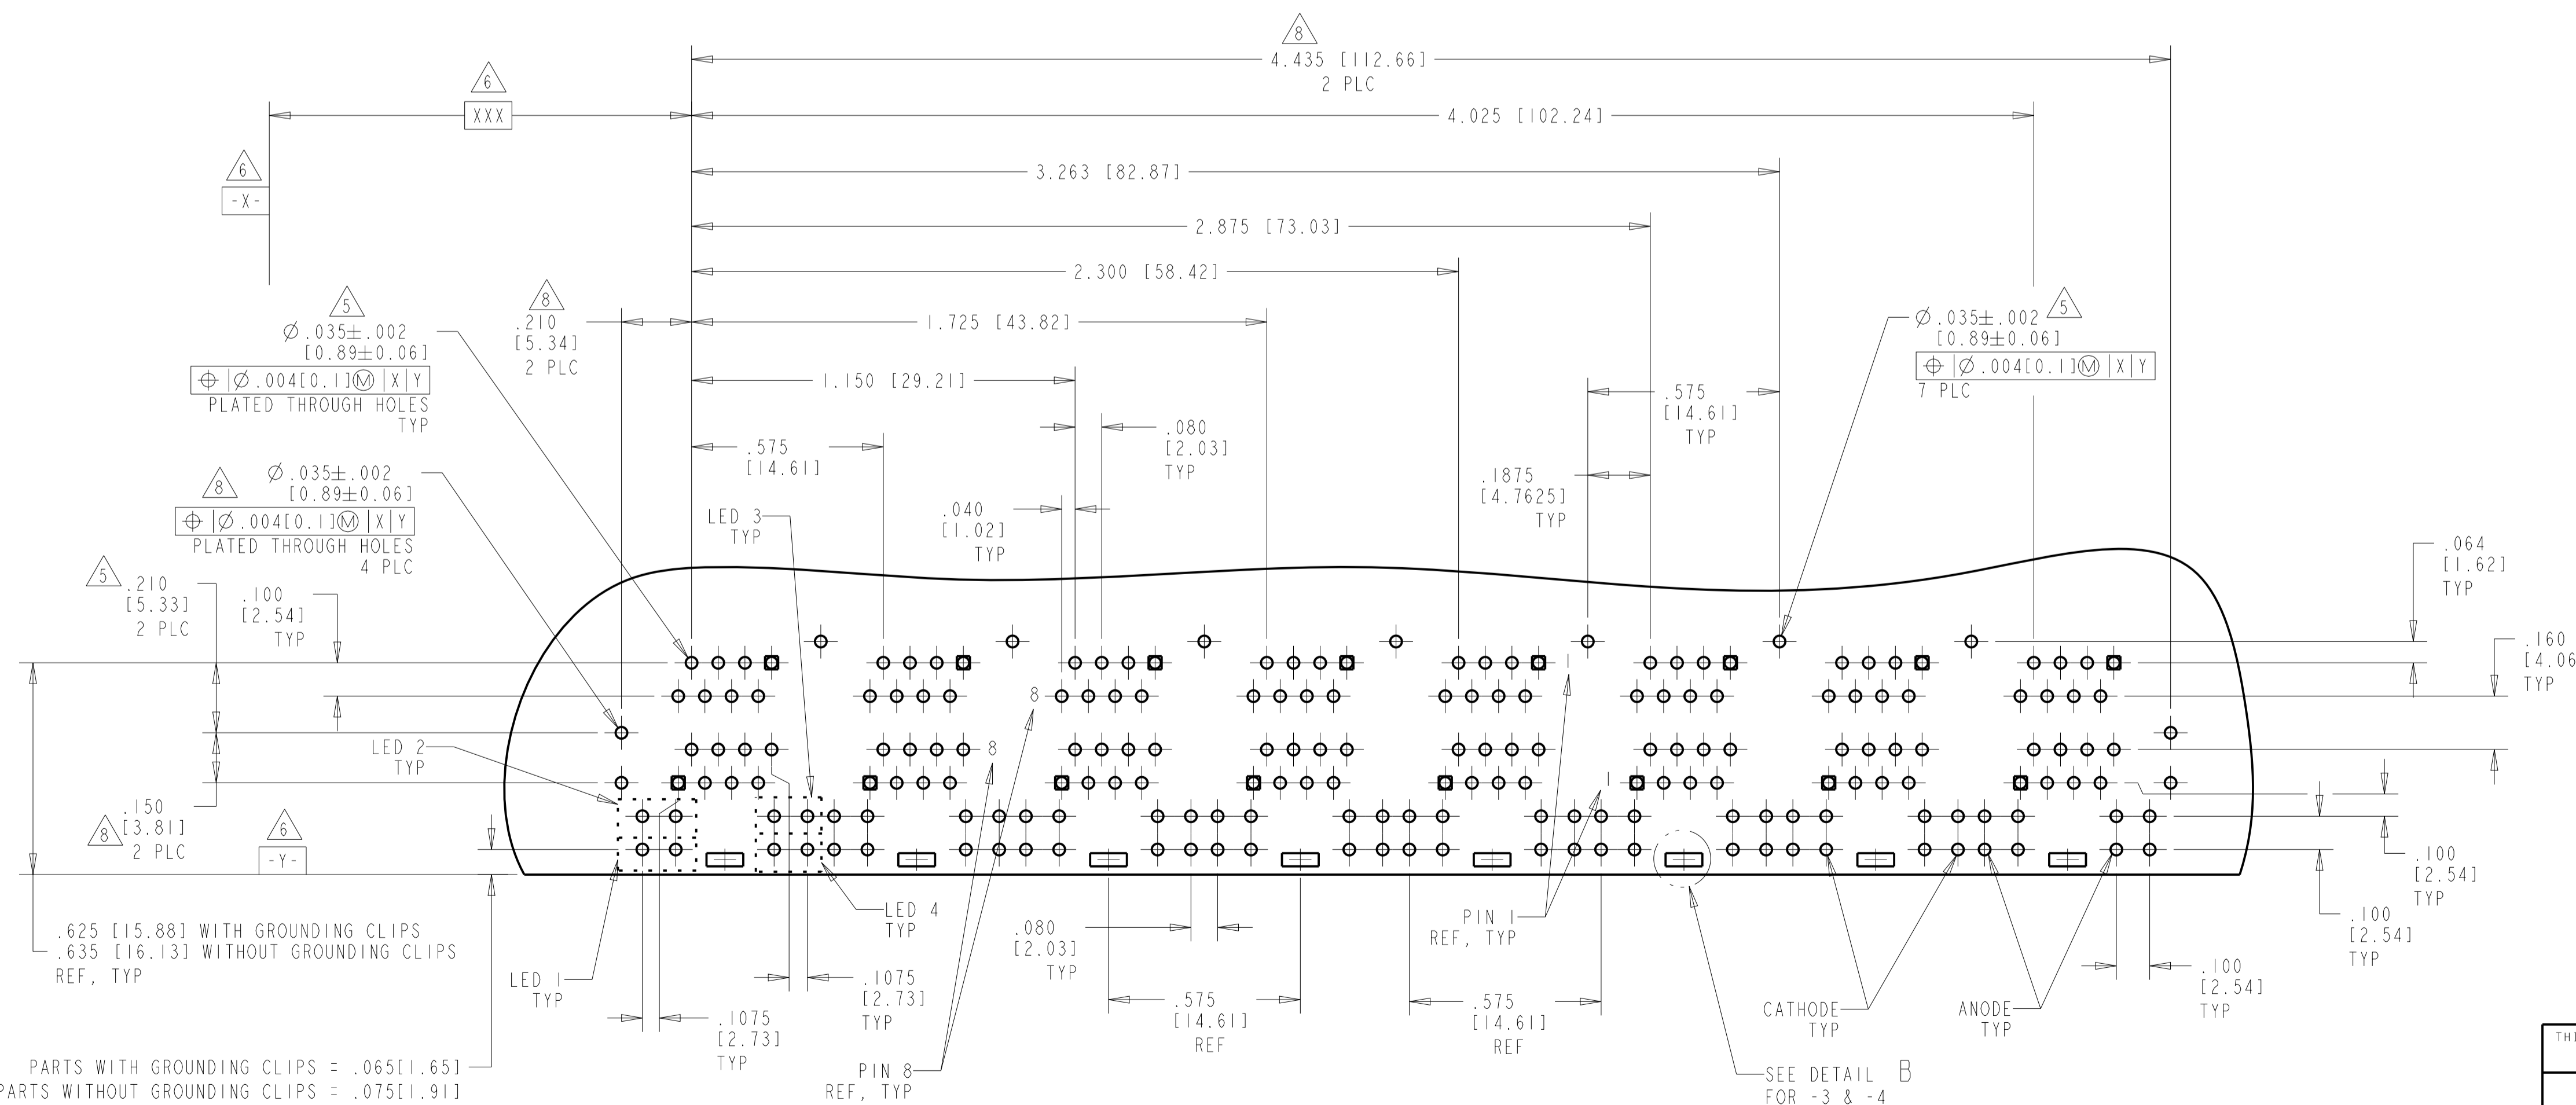



PC BOARD LAYOUT
(COMPONENT SIDE)

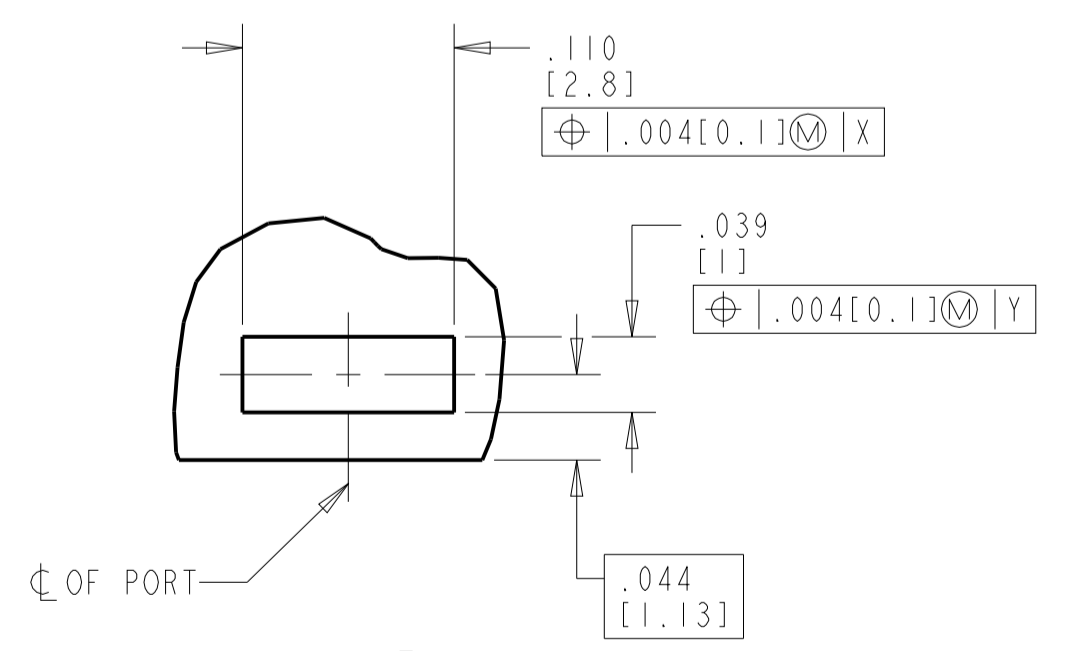

DETAIL B
THESE PLATED PADS REQUIRED FOR 6116317-3 & -4
PRODUCTS WITH GROUNDING CLIPS
SCALE 10:1
8 PLACES

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN L. VARELA	23 JUN 2005	 TE Connectivity
DIMENSIONS: INCHES(mm)		CHK J. WESTMAN	23 JUN 2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. FLICKINGER	23 JUN 2005	NAME STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEDs, 8 POSITION, SHIELDED PANEL GROUND, OFFSET, CAT 5
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.005 [0.13] 4 PLC ±.005 [0.13] ANGLES ±		PRODUCT SPEC 108-1854 APPLICATION SPEC 114-2160		
MATERIAL	FINISH	WEIGHT	77.2 grams	SIZE CAGE CODE DRAWING NO A1 00779 ©=6116317
CUSTOMER DRAWING		SCALE	3:1	RESTRICTED TO SHEET 2 OF 3 REV D

LOC	DIST	REVISIONS			
AA	22	REV	DATE	BY	APPD
		-	SEE SHEET 1	-	-

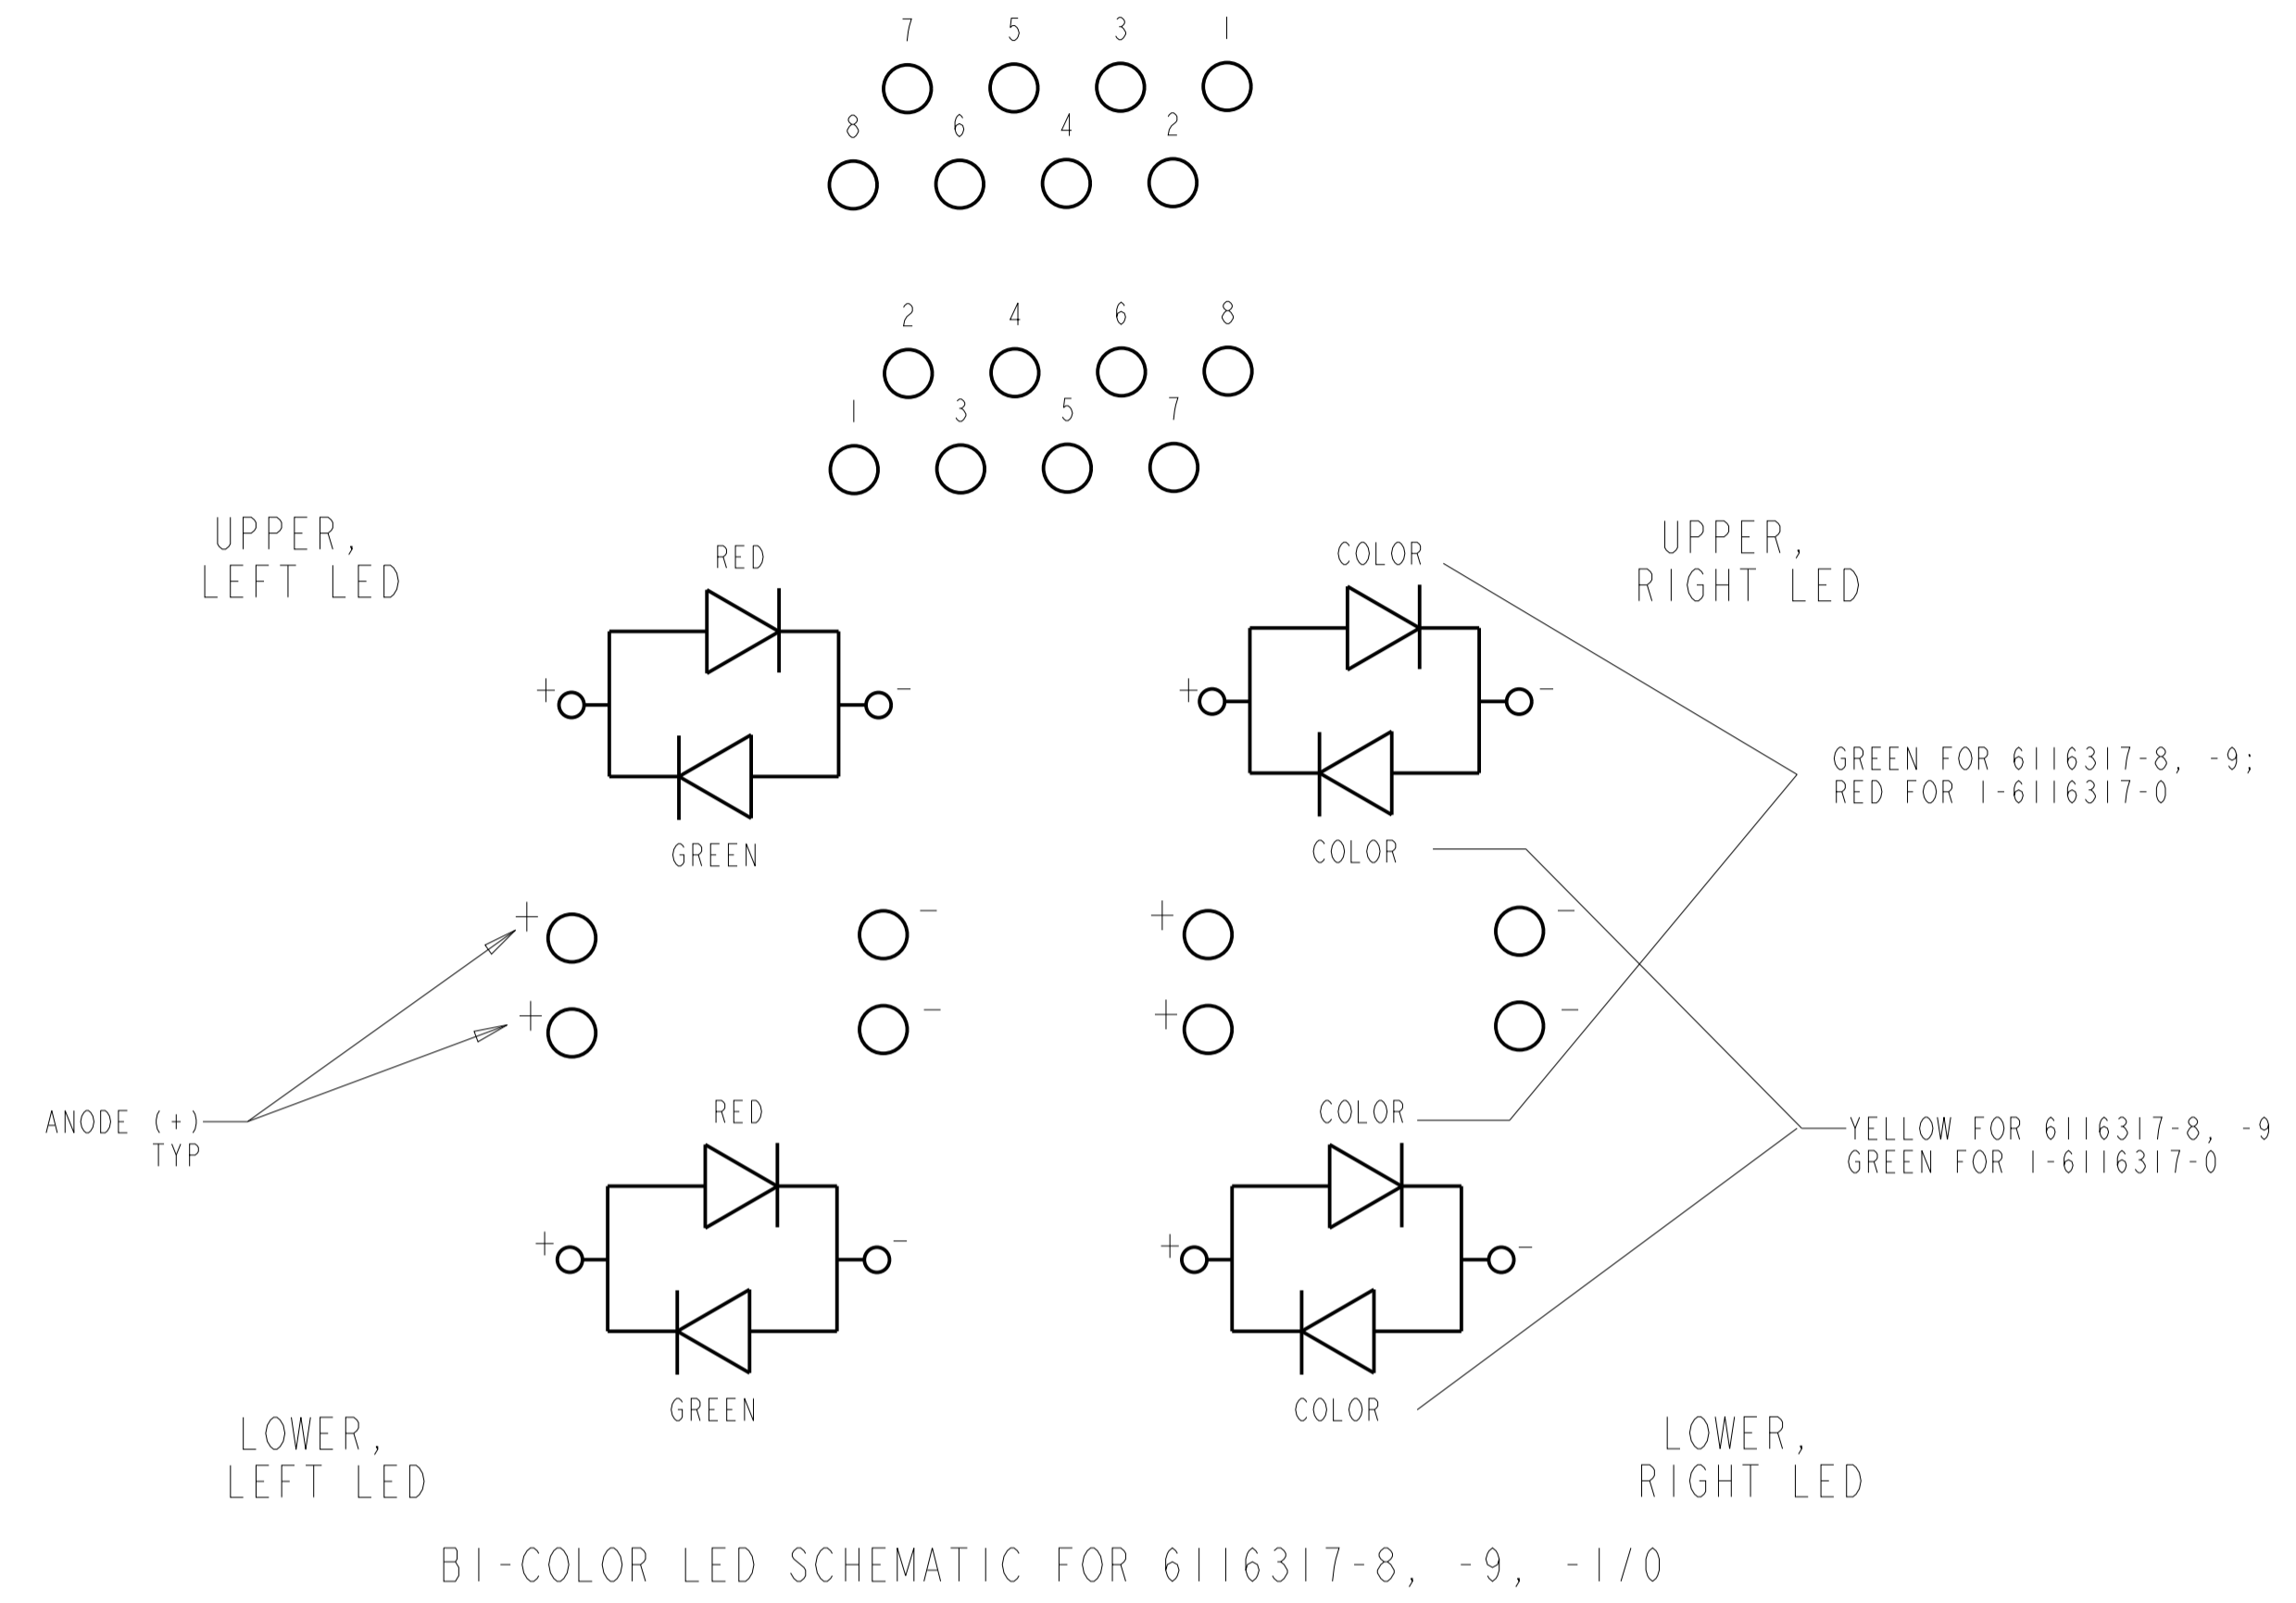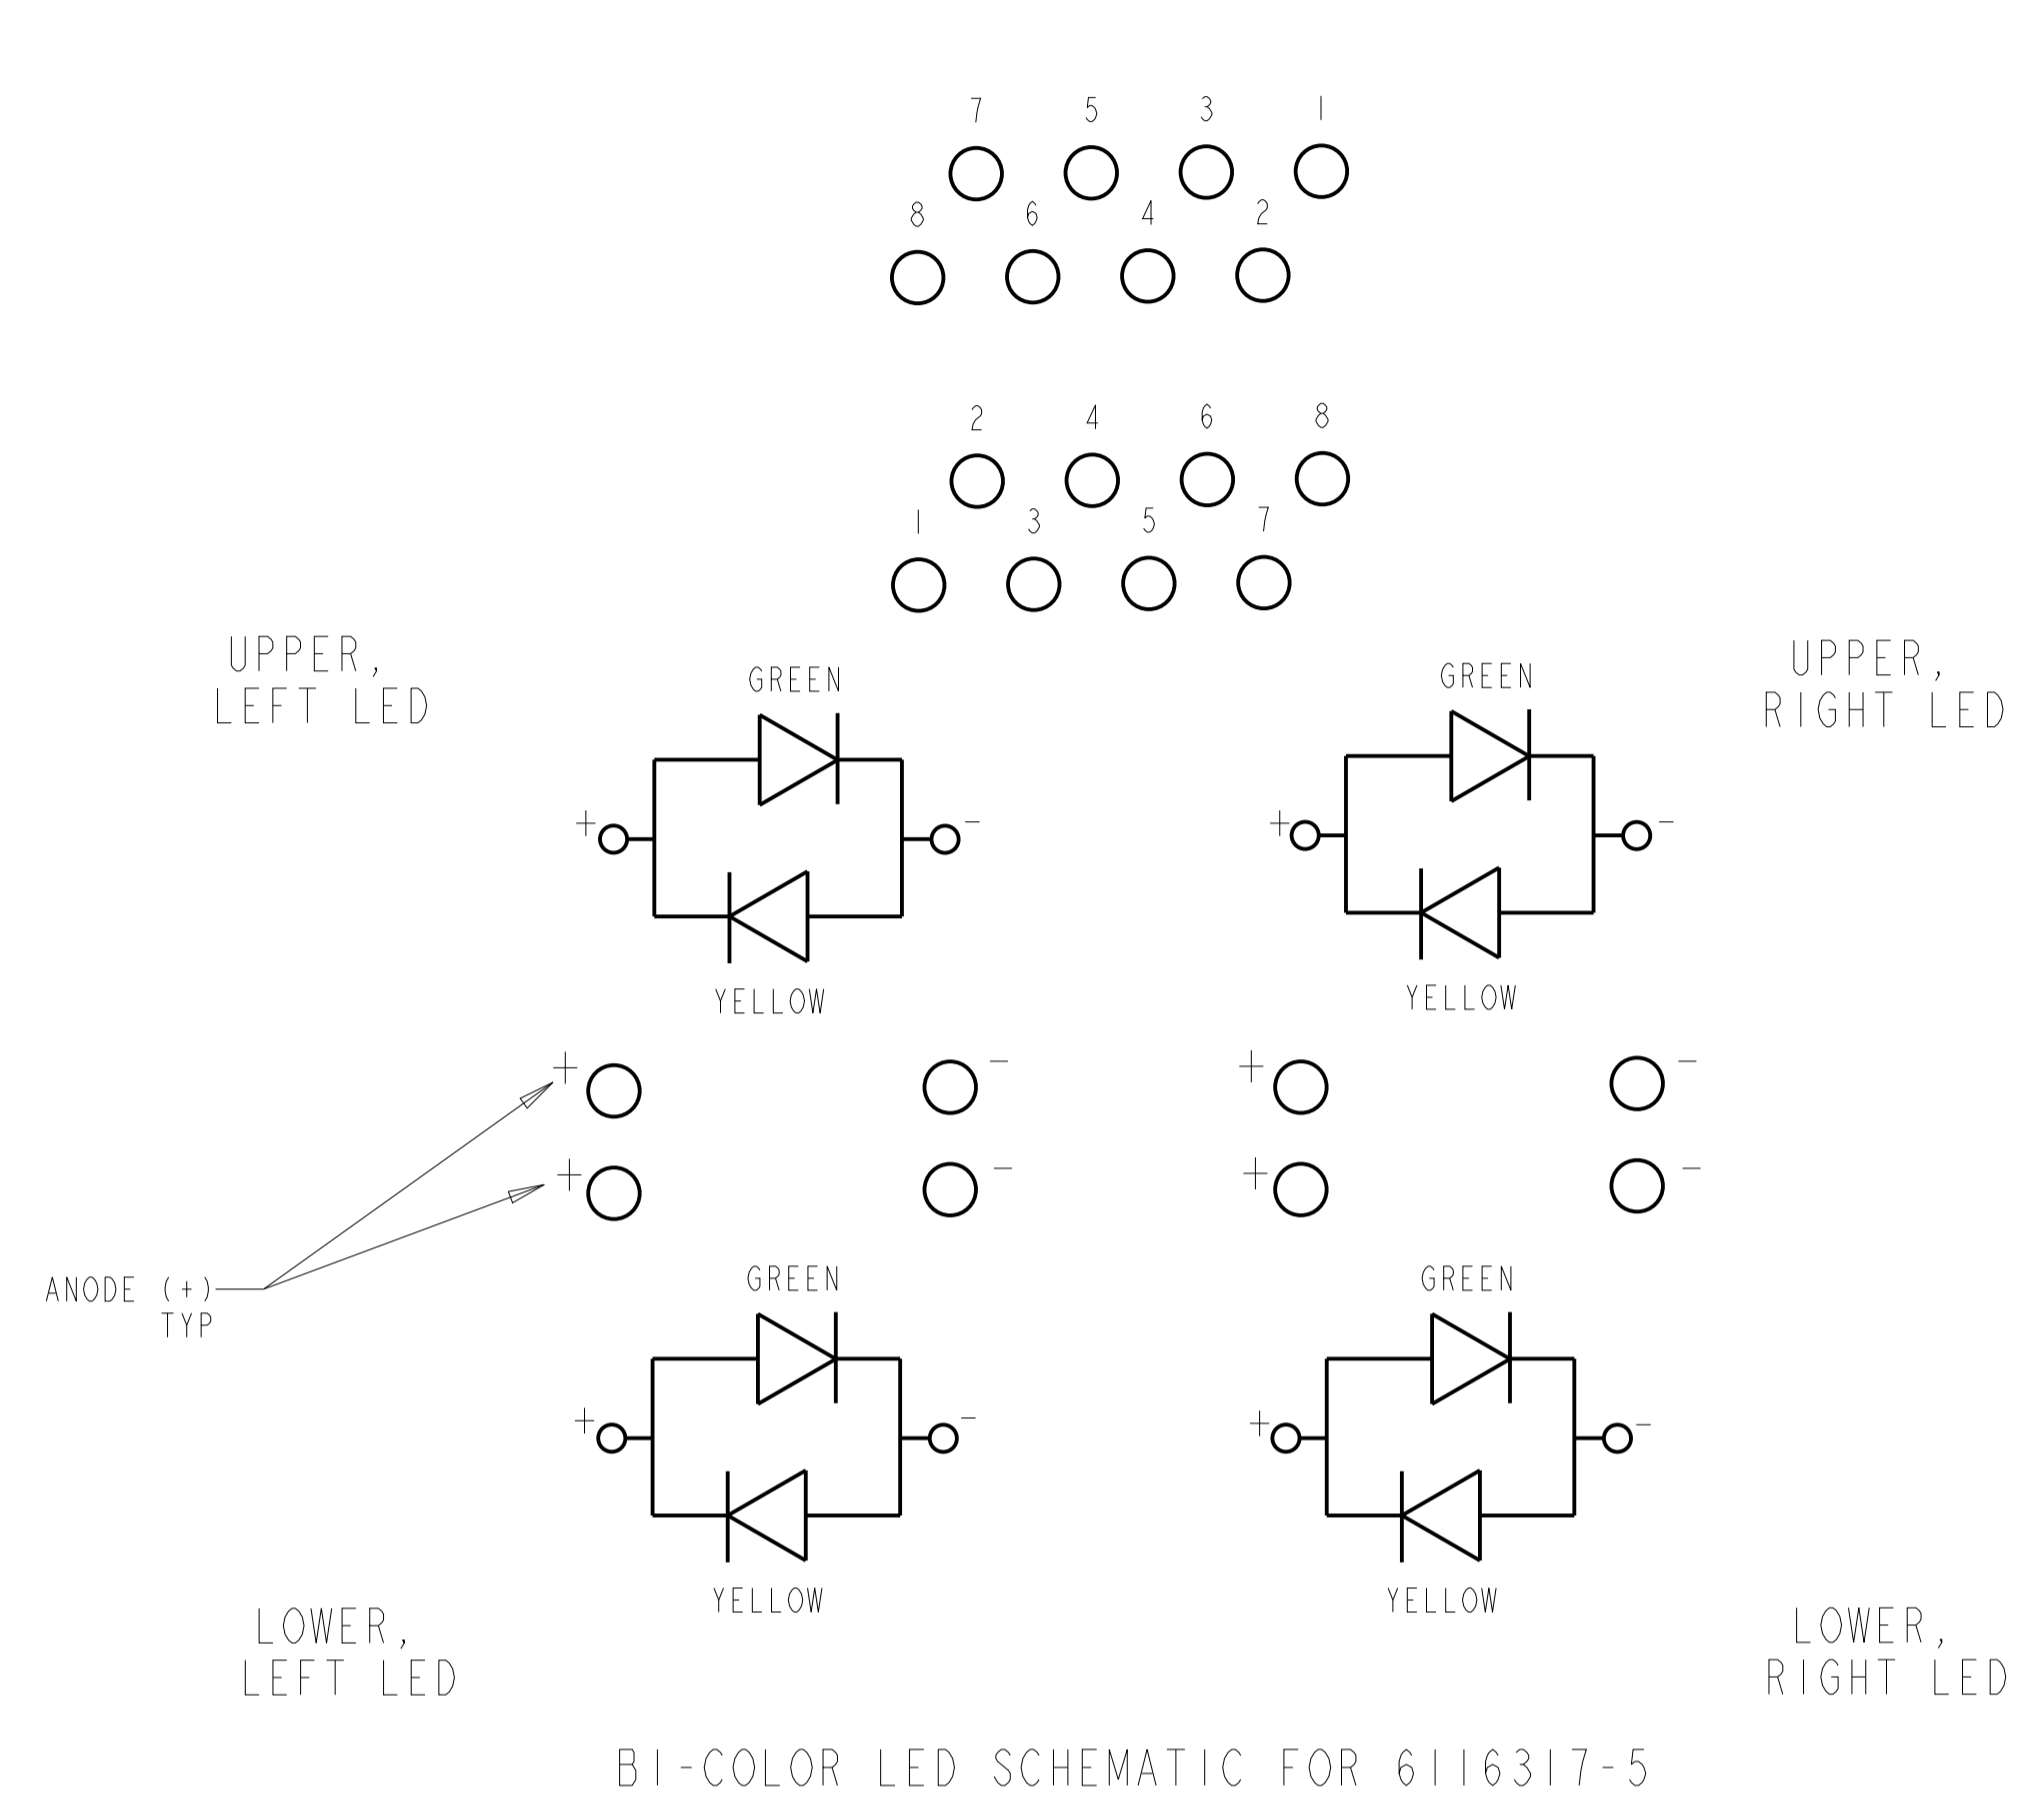

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - DOCKS 23 JUN 2005	 TE Connectivity
DIMENSIONS: [INCHES(mm)]		CHK J. WESTMAN 23 JUN 2005	
		APVD S. FLICKINGER 23 JUN 2005	NAME STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEDS, 8 POSITION, SHIELDED PANEL GROUND, OFFSET, CAT 5
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1854	SIZE A1
0 PLC ±. 2 PLC ±. 3 PLC ±. 4 PLC ±.005 [0.13] ANGLES ±.		APPLICATION SPEC 114-2160	RESTRICTED TO
MATERIAL	FINISH	WEIGHT 77.2 grams	CAGE CODE DRAWING NO 00779 ©=6116317
CUSTOMER DRAWING		SCALE 3:1	SHEET 3 OF 3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)