
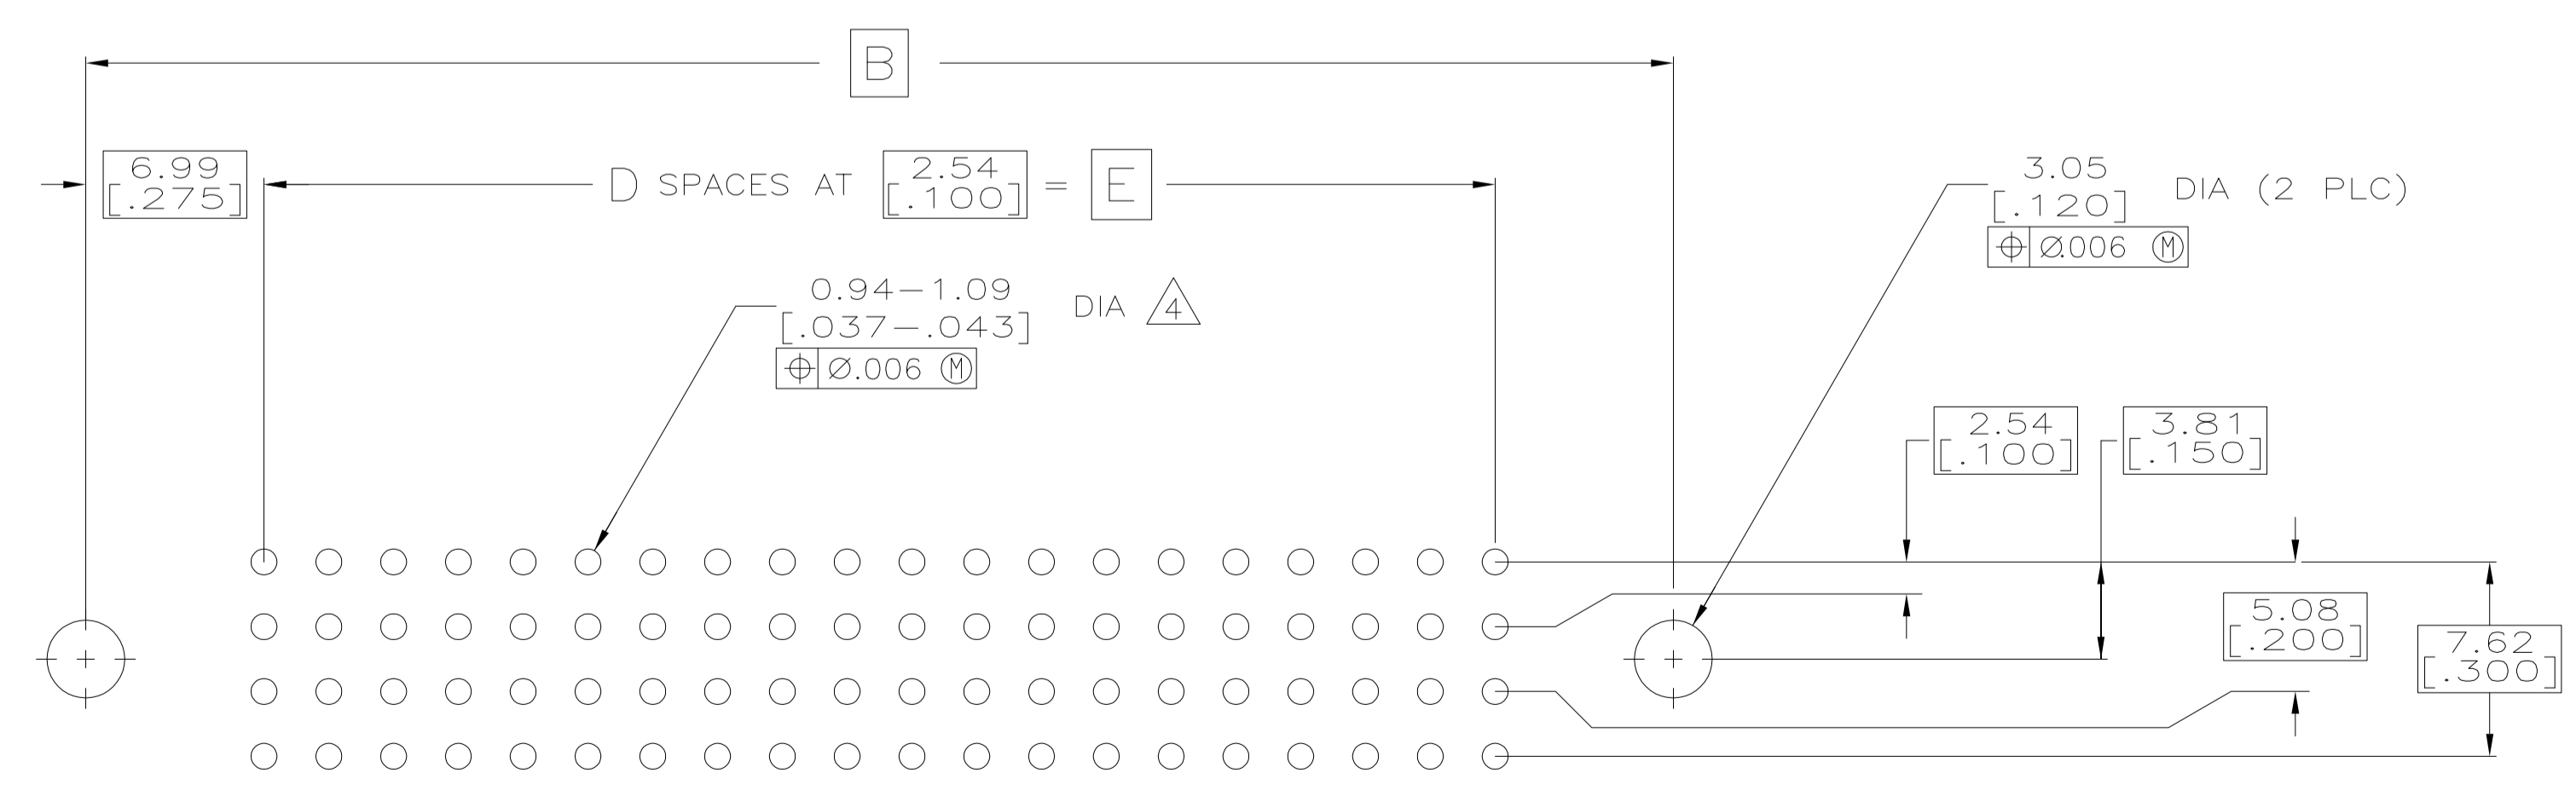
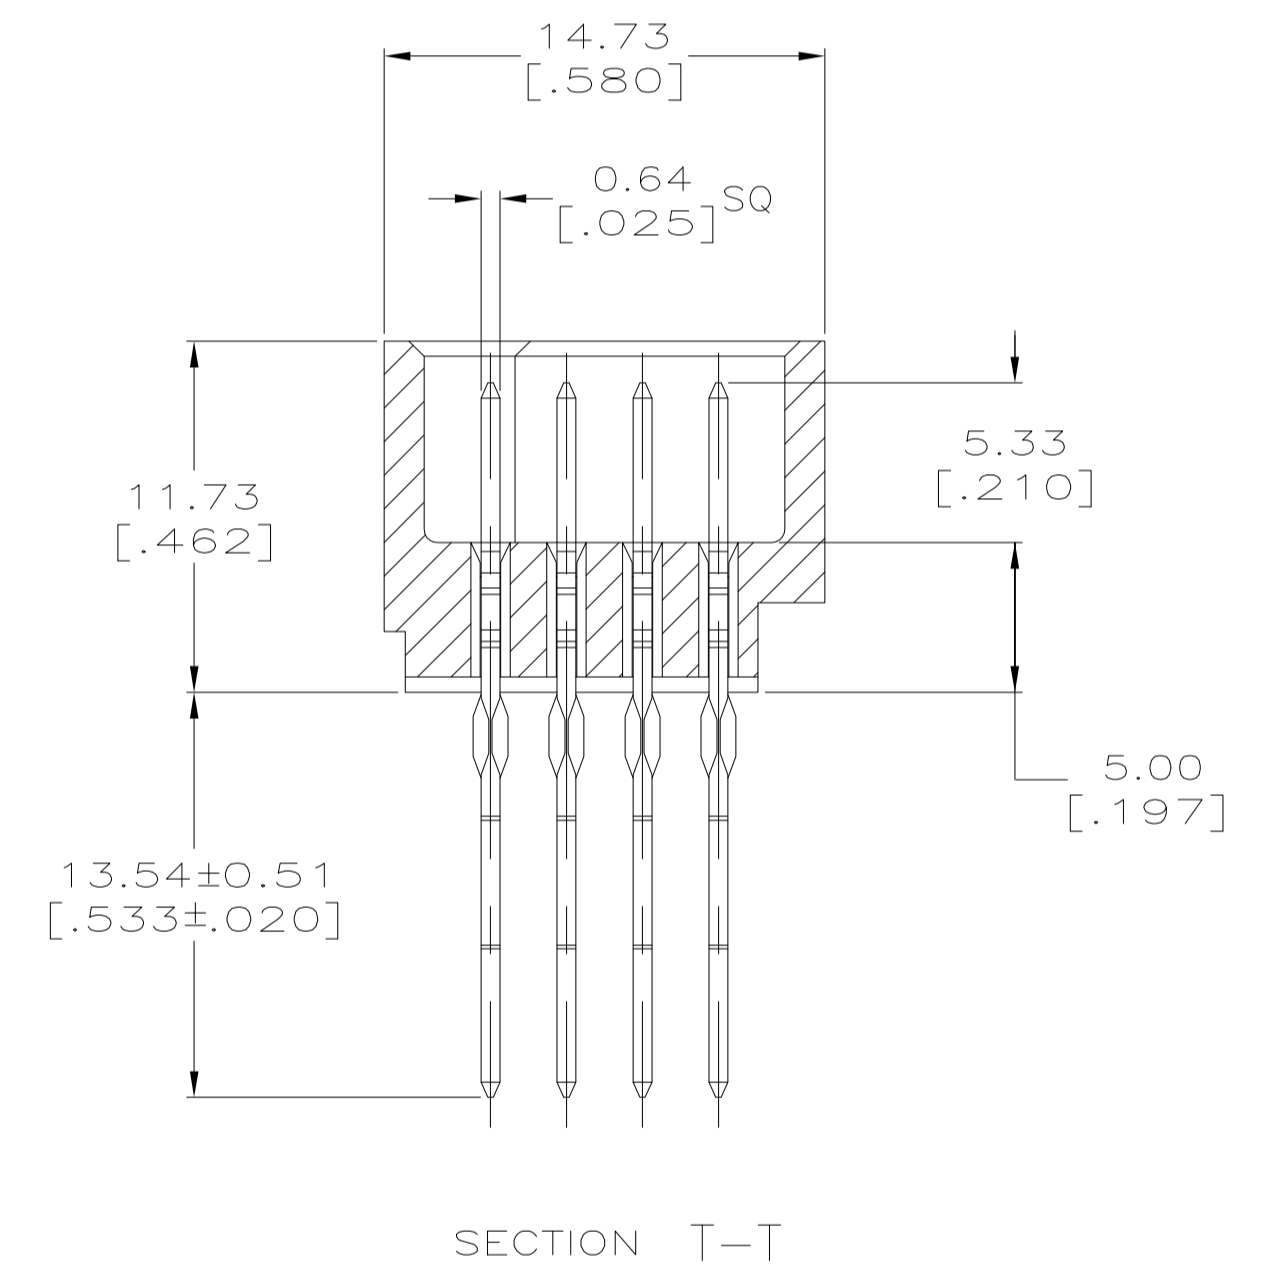
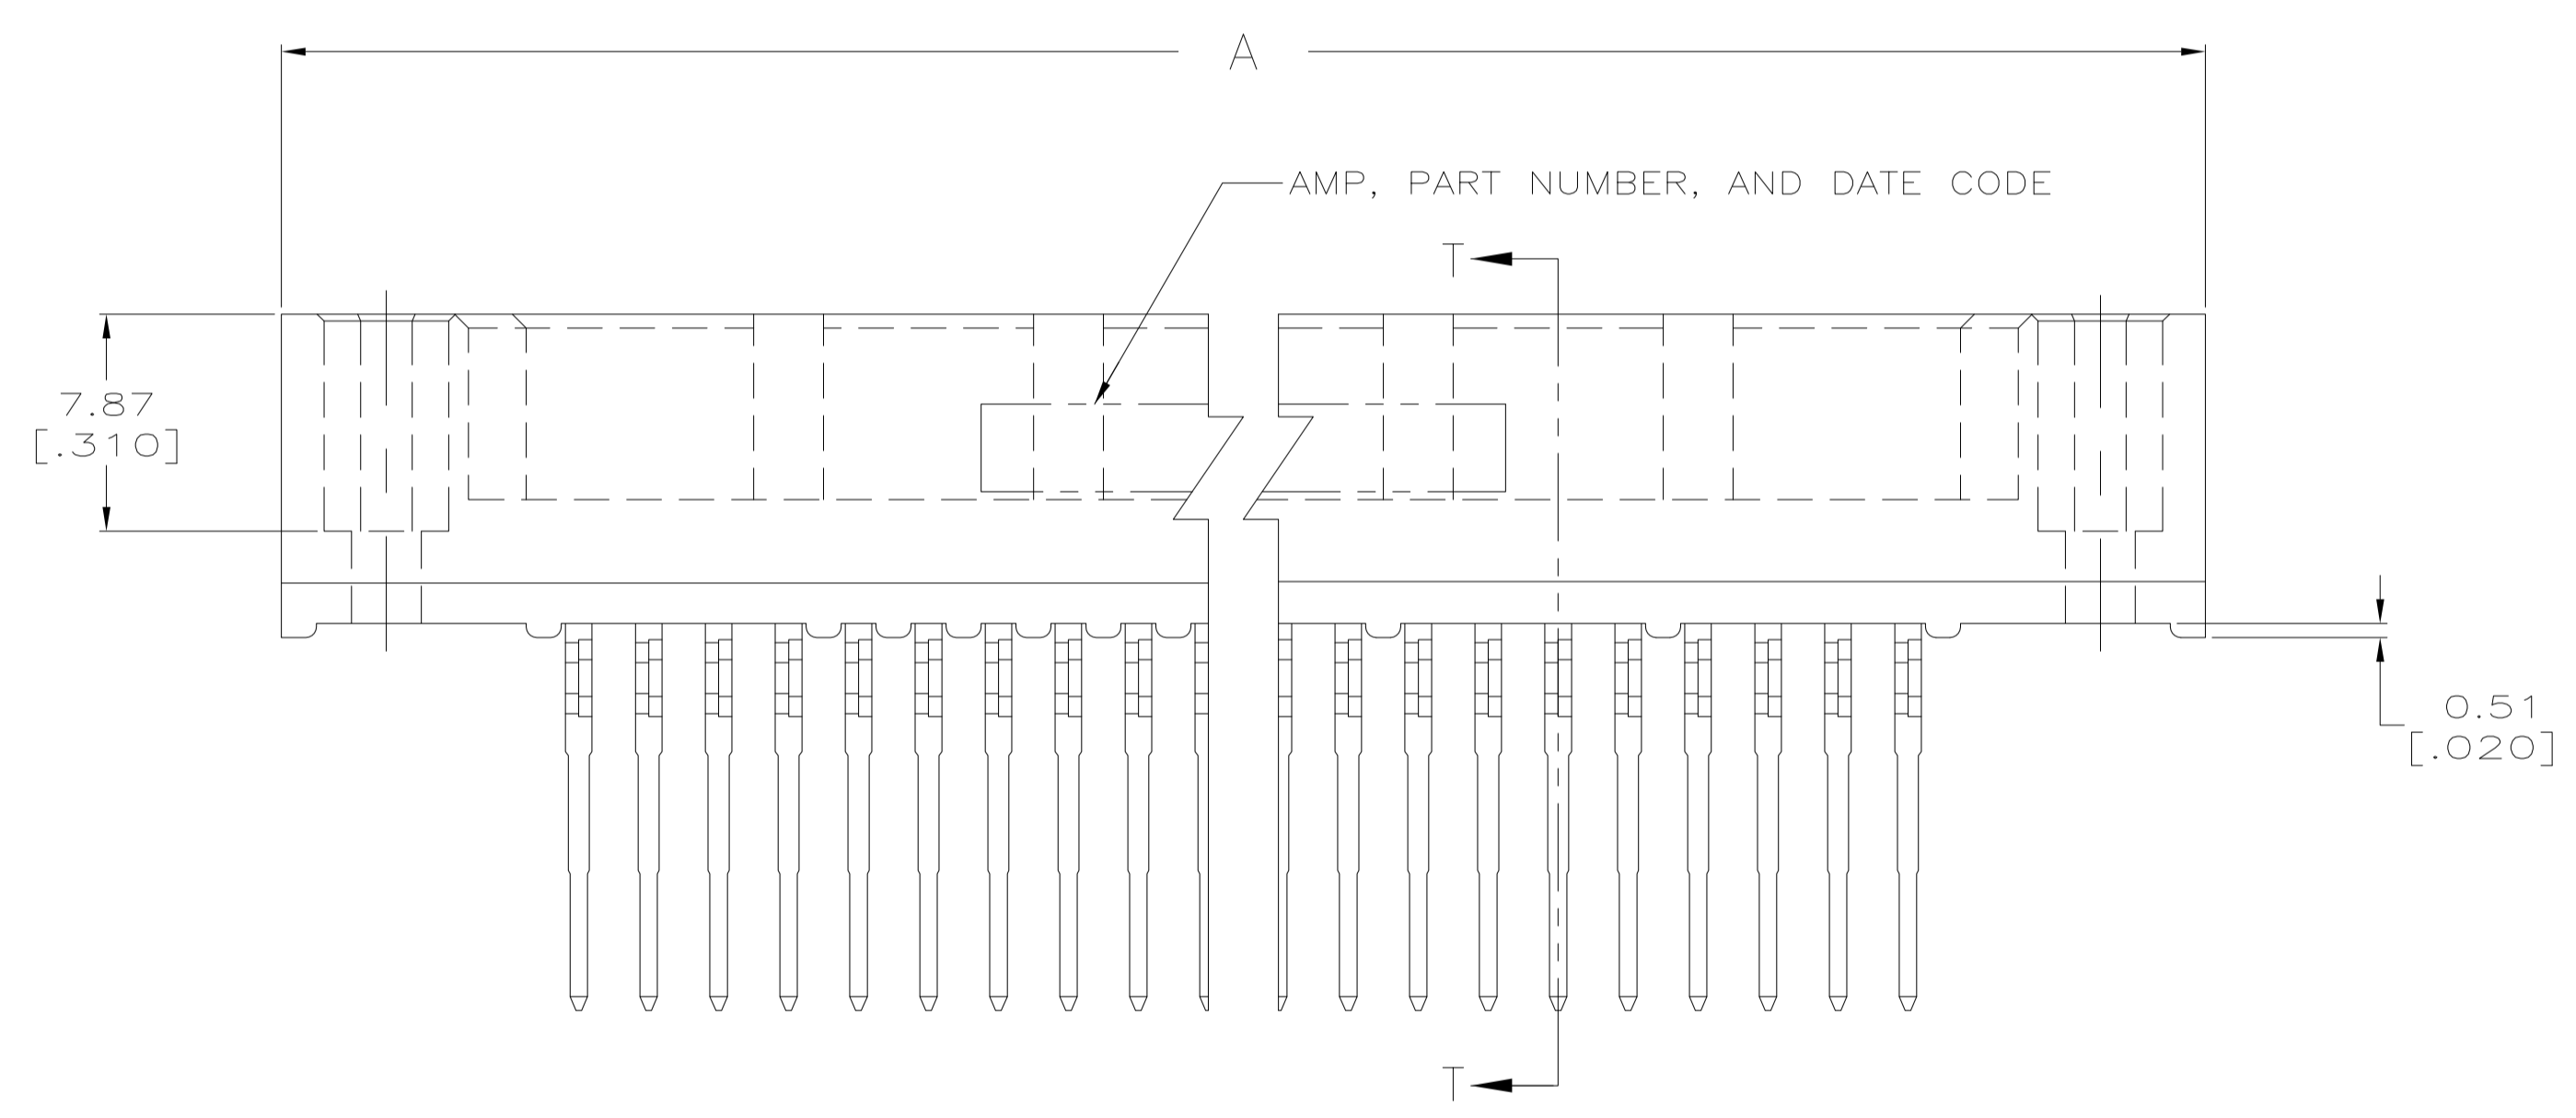


REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
M		REV PER ECO-15-015252	13NOV15	BJ FY

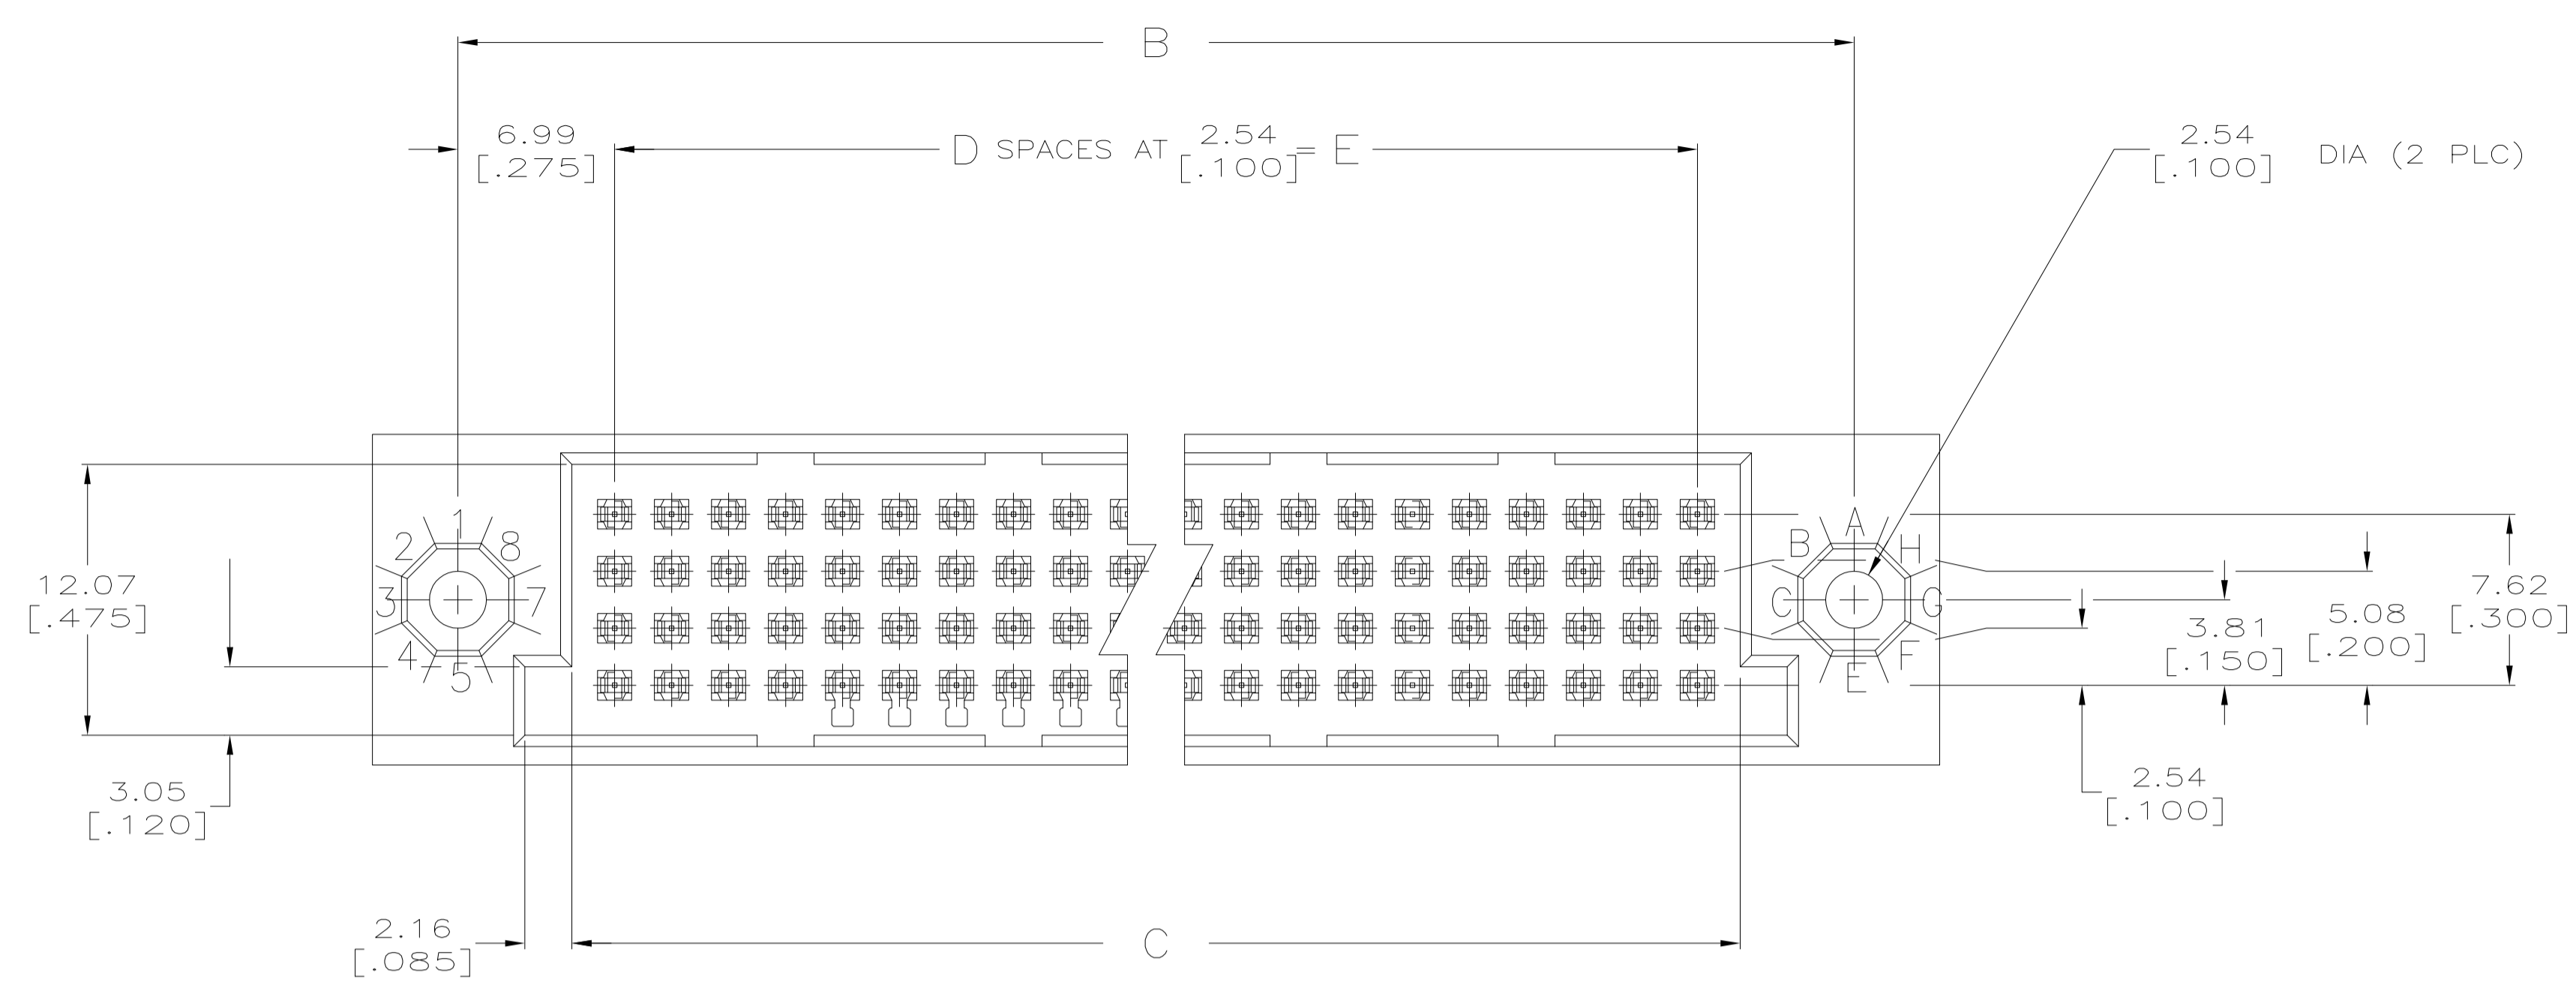

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. K. SEIFRIED 04/09/90	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK F. KIBLER 8-17-92	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	PRODUCT SPEC	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± - FINISH		APPLICATION SPEC	HDI, 4 ROW, PIN ASSEMBLY, 13.54 [.533] LONG ACTION PINS, ALL GOLD PLATED POSTS	
MATERIAL	FINISH	WEIGHT	SIZE	RESTRICTED TO
1/2	3	0	A1 00779 C=533270	-
CUSTOMER DRAWING			SCALE	SHEET
			4:1	1 OF 2
				REV M

REVISIONS			
P	LTR	DESCRIPTION	DATE
		SEE SHEET 1	-

- 1 HOUSING MATERIAL: THERMOPLASTIC, COLOR-BLACK.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
GOLD FLASH ON REMAINDER OF POST.
- 4 ACTION PIN POSTS REQUIRE 2.36 [.093] MIN THICK P.C. BOARD. RECOMMENDED P.C. BOARD HOLES ARE 1.151 [.0453] DIA PLATED THRU WITH 0.025-0.076 [.001-.003] COPPER, WITH 0.0076 [.0003] MIN TIN-LEAD PLATING; FINISHED HOLE AFTER PLATING 0.94-1.09 [.037-.043] DIA.
- 5 HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.
- 6 OBSOLETE.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Part No	Pitch	Length	Width	Height	Row	Part No
5 251.46 [9.900]	-99-	255.27 [10.050]	265.43 [10.450]	273.05 [10.750]	400	1-533270-6
5 226.06 [8.900]	-89-	229.87 [9.050]	240.03 [9.450]	247.65 [9.750]	360	1-533270-5
5 213.36 [8.400]	-84-	217.17 [8.550]	227.33 [8.950]	234.95 [9.250]	340	1-533270-4
5 200.66 [7.900]	-79-	204.47 [8.050]	214.63 [8.450]	222.25 [8.750]	320	1-533270-3
7 OBSOLETE 187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	300	1-533270-2
6 175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	280	1-533270-1
6 162.56 [6.400]	64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	260	1-533270-0
6 149.86 [5.900]	59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	240	533270-9
		137.16 [5.400]	140.97 [5.550]	151.13 [5.950]	220	533270-8
		124.46 [4.900]	128.27 [5.050]	138.43 [5.450]	200	533270-7
6 111.76 [4.400]	44	115.57 [4.550]	125.73 [4.950]	133.35 [5.250]	180	533270-6
		99.06 [3.900]	102.87 [4.050]	113.03 [4.450]	160	533270-5
6 86.36 [3.400]	34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	140	533270-4
6 78.74 [3.100]	31	82.55 [3.250]	92.71 [3.650]	100.33 [3.950]	128	533270-3
6 73.66 [2.900]	29	77.47 [3.050]	87.63 [3.450]	95.25 [3.750]	120	533270-2
7 OBSOLETE 60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	100	533270-1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 04/09/90 R.K. SEIFRIED		DKW 8-17-92 F. KIELER		APVD -		NAME		STE TE Connectivity	
DIMENSIONS:				TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		APPLICATION SPEC		SIZE		CAGE CODE DRAWING NO	
mm [INCHES]				0 PLC ± .13 [.005]		1 PLC ± .13 [.005]		2 PLC ± .13 [.005]		3 PLC ± .13 [.005]		4 PLC ± .13 [.005]	
MATERIAL				FINISH		WEIGHT		SCALE		SHEET		REV	
1 2				3		0		A1 00779 C=533270		4:1		2 of 2	
CUSTOMER DRAWING											M		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)