

**SAFETY ORGANIZATION(S):**

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

- UL 1283
- CSA 22.2, NO. 0.0.4.8
- VDE 565-3
- SEMKO APPROVED
- SEMKO 432901

**OPERATING SPECIFICATIONS:**

- LINE VOLTAGE/CURRENT, 6 AMP., 120/250 VAC
- 50-60HZ
- LINE FREQUENCY, 50-60HZ

MAX. LEAKAGE CURRENT, EACH LINE TO GROUND

OPERATING AMBIENT TEMP. RANGE, -10°C TO +40°C @ RATED CURRENT,  $I_r$

IN AN AMBIENT,  $T_a$ , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT,  $I_o$ , IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{95 - T_a}{45}}$$

**RELIABILITY SPECIFICATIONS:**

- STORAGE TEMPERATURE, -40°C TO +85°C
- HUMIDITY, 21 DAYS @ 40°C 95% RH
- CURRENT OVERLOAD TEST, 6 TIMES RATED CURRENT FOR 8 SECONDS

**TEST SPECIFICATIONS:**

- INDUCTANCE, .465 mH NOMINAL
- CAPACITANCE, (MEASURED @ 1 KHZ, 0.25 VAC MAX., 25°C ±1°C)
- LINE TO GROUND, .003µF ±20%
- LINE TO LINE, .047µF ±20%
- DISCHARGE RESISTOR, 1.5 MΩ
- LINE/GROUND AND LINE/LINE, 6000 MΩ (MIN) AT 100 VDC
- INSULATION RESISTANCE (W/O DISCHARGE RESISTOR), 20°C AND 50% RH



**RECOMMENDED RECEIVING INSPECTION HIPOTL:**

- 2250 VDC FOR 1 MINUTE
- 1450 VDC FOR 1 MINUTE

**FILTER APPROVAL:**  
 THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

**TOLERANCE EXCEPT AS NOTED**

DECIMAL, .XXX .XX	.X ANGLES
ENGLISH, ±.020	± 1°
METRIC, ±	
MATERIAL:	
AS SUPPLIED	
FINISH:	
AS SUPPLIED	

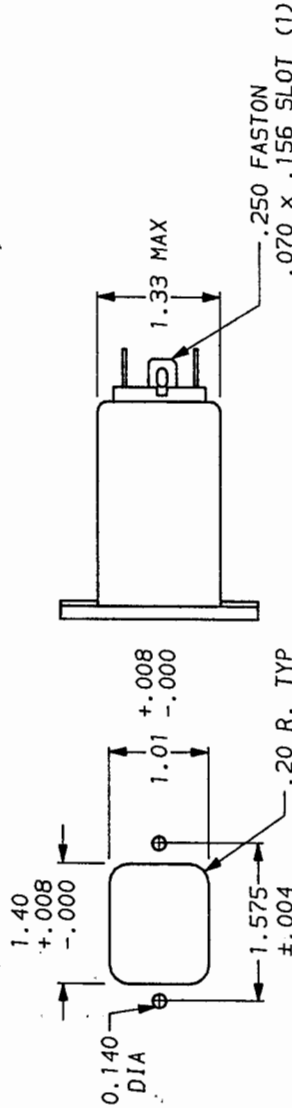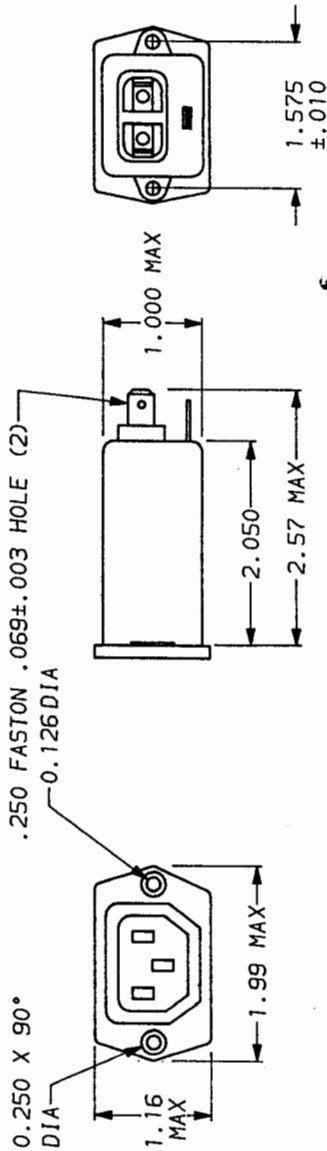

**THIS FILTER LINE AND LOAD ARE REVERSED; THE SOCKET IS LOAD.**



FREQUENCY	50Ω - 50n (MINIMUM) INSERTION LOSS										
NHZ	.01	.05	.1	.15	.5	1	5	10	30	50	
COMMON	1	4	10	22	28	37	42	46	47	47	
DIFF. dB	—	—	—	1	2	10	14	20	33	42	40

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.



ACCESSORY OUTLET FILTER

SCALE	DATE	DRG. NO.	REV.
NTS	11-5-90		6EBF1.02
DRW. BY	ORIGINATOR		
CFW	CFW		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)