


13 OBSOLETE
SUPERSEDED BY 8-147743-8
SUPERSEDED BY 8-147743-7
SUPERSEDED BY 8-147743-6

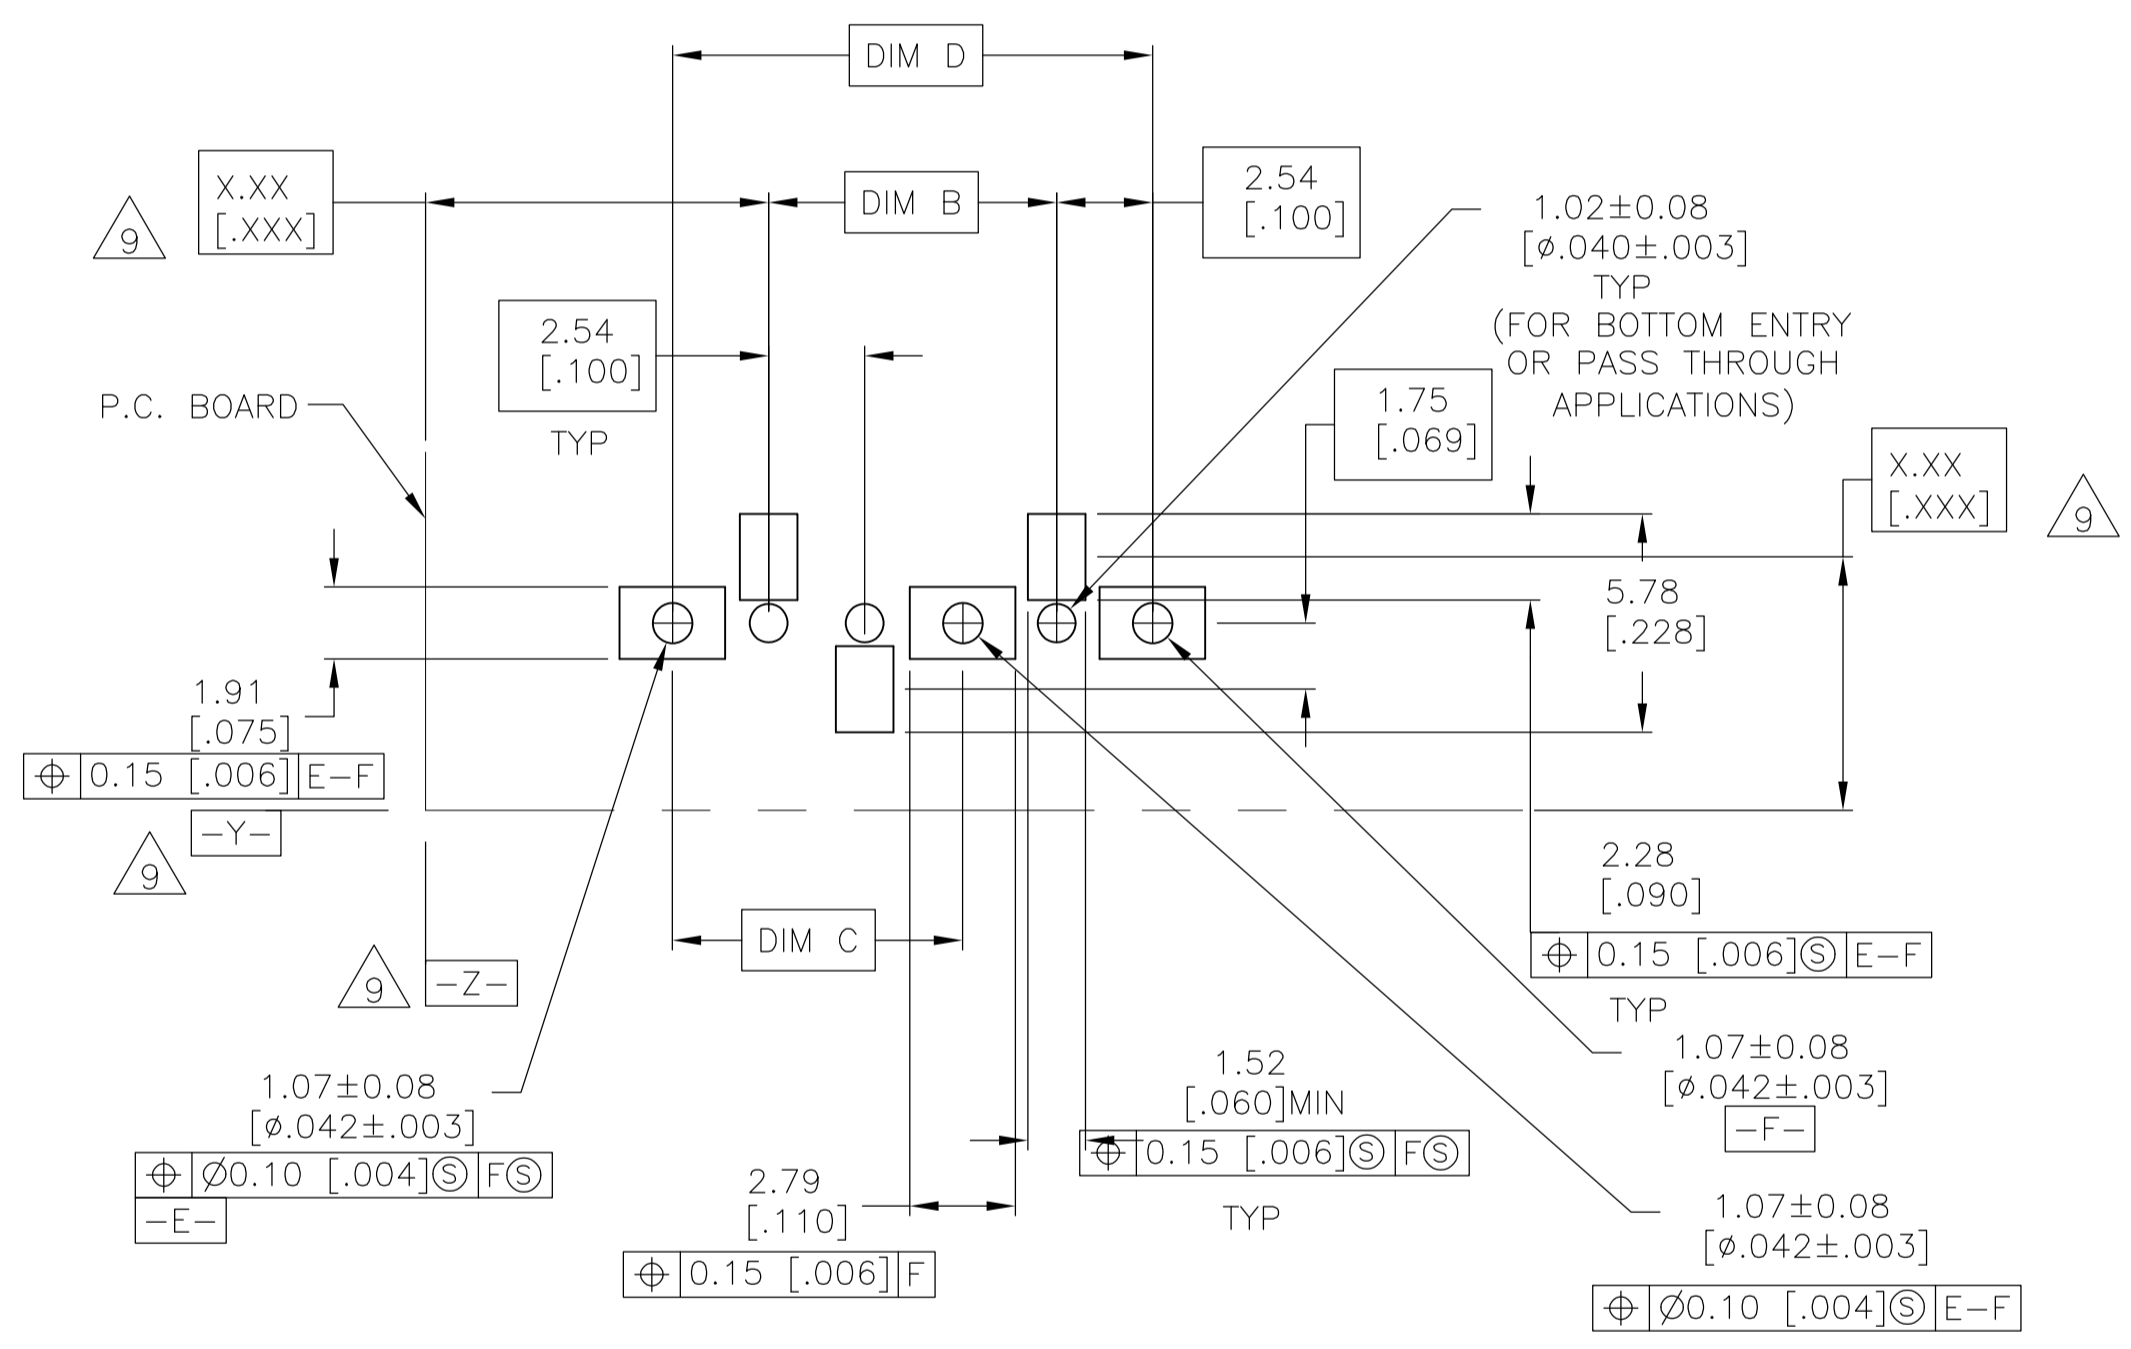

RECOMMENDED PC BOARD PAD PATTERN
0.20[.008] THICK STENCIL

13 OBSOLETE
SUPERSEDED BY 3-147743-8
SUPERSEDED BY 3-147743-7
SUPERSEDED BY 3-147743-6

FINISH	EIA TAPE WIDTH	D	C	B	A	NO OF POSN	PART NUMBER		
13	24mm	7.62 [.300]		2.54 [.100]	10.16 [.400]	2	8-147730-9		
	N/A	106.68 [4.200]	53.34 [2.100]	104.14 [4.100]	109.22 [4.300]	40	8-147730-8		
		104.14 [4.100]	50.8 [2.000]	101.6 [4.000]	106.68 [4.200]	39	8-147730-7		
		101.6 [4.000]	50.8 [2.000]	99.06 [3.900]	104.14 [4.100]	38	8-147730-6		
	120mm		99.06 [3.900]	48.26 [1.900]	96.52 [3.800]	101.6 [4.000]	37	8-147730-5	
			96.52 [3.800]	48.26 [1.900]	93.98 [3.700]	99.06 [3.900]	36	8-147730-4	
			93.98 [3.700]	45.72 [1.800]	91.44 [3.600]	96.52 [3.800]	35	8-147730-3	
			88.9 [3.500]		83.82 [3.300]	91.44 [3.600]	34	8-147730-2	
			86.36 [3.400]		81.28 [3.200]	88.9 [3.500]	33	8-147730-1	
			83.82 [3.300]		78.74 [3.100]	86.36 [3.400]	32	8-147730-0	
			81.28 [3.200]		76.2 [3.000]	83.82 [3.300]	31	7-147730-9	
			78.74 [3.100]		73.66 [2.900]	81.28 [3.200]	30	7-147730-8	
			76.2 [3.000]		71.12 [2.800]	78.74 [3.100]	29	7-147730-7	
			73.66 [2.900]		68.58 [2.700]	76.2 [3.000]	28	7-147730-6	
			71.12 [2.800]		66.04 [2.600]	73.66 [2.900]	27	7-147730-5	
			68.58 [2.700]		63.5 [2.500]	71.12 [2.800]	26	7-147730-4	
	88mm		66.04 [2.600]		60.96 [2.400]	68.58 [2.700]	25	7-147730-3	
			63.5 [2.500]		58.42 [2.300]	66.04 [2.600]	24	7-147730-2	
			60.96 [2.400]		55.88 [2.200]	63.5 [2.500]	23	7-147730-1	
			58.42 [2.300]		53.34 [2.100]	60.96 [2.400]	22	7-147730-0	
		72mm		55.88 [2.200]		50.8 [2.000]	58.42 [2.300]	21	6-147730-9
				53.34 [2.100]		48.26 [1.900]	55.88 [2.200]	20	6-147730-8
				50.8 [2.000]		45.72 [1.800]	53.34 [2.100]	19	6-147730-7
				48.26 [1.900]		43.18 [1.700]	50.8 [2.000]	18	6-147730-6
				45.72 [1.800]		40.64 [1.600]	48.26 [1.900]	17	6-147730-5
				43.18 [1.700]		38.1 [1.500]	45.72 [1.800]	16	6-147730-4
				40.64 [1.600]		35.56 [1.400]	43.18 [1.700]	15	6-147730-3
				38.1 [1.500]		33.02 [1.300]	40.64 [1.600]	14	6-147730-2
			35.56 [1.400]		30.48 [1.200]	38.1 [1.500]	13	6-147730-1	
			33.02 [1.300]		27.94 [1.100]	35.56 [1.400]	12	6-147730-0	
			30.48 [1.200]		25.4 [1.000]	33.02 [1.300]	11	5-147730-9	
			27.94 [1.100]		22.86 [.900]	30.48 [1.200]	10	5-147730-8	
	44mm		25.4 [1.000]		20.32 [.800]	27.94 [1.100]	9	5-147730-7	
			22.86 [.900]		17.78 [.700]	25.4 [1.000]	8	5-147730-6	
			20.32 [.800]		15.24 [.600]	22.86 [.900]	7	5-147730-5	
			17.78 [.700]		12.7 [.500]	20.32 [.800]	6	5-147730-4	
			15.24 [.600]		10.16 [.400]	17.78 [.700]	5	5-147730-3	
			12.7 [.500]		7.62 [.300]	15.24 [.600]	4	5-147730-2	
			10.16 [.400]		5.08 [.200]	12.7 [.500]	3	5-147730-1	
		24mm	7.62 [.300]		2.54 [.100]	10.16 [.400]	2	3-147730-9	
N/A		106.68 [4.200]	53.34 [2.100]	104.14 [4.100]	109.22 [4.300]	40	3-147730-8		
		104.14 [4.100]	50.8 [2.000]	101.6 [4.000]	106.68 [4.200]	39	3-147730-7		
		101.6 [4.000]	50.8 [2.000]	99.06 [3.900]	104.14 [4.100]	38	3-147730-6		
120mm			99.06 [3.900]	48.26 [1.900]	96.52 [3.800]	101.6 [4.000]	37	3-147730-5	
		96.52 [3.800]	48.26 [1.900]	93.98 [3.700]	99.06 [3.900]	36	3-147730-4		
		93.98 [3.700]	45.72 [1.800]	91.44 [3.600]	96.52 [3.800]	35	3-147730-3		
		88.9 [3.500]		83.82 [3.300]	91.44 [3.600]	34	3-147730-2		
		86.36 [3.400]		81.28 [3.200]	88.9 [3.500]	33	3-147730-1		
		83.82 [3.300]		78.74 [3.100]	86.36 [3.400]	32	3-147730-0		
		81.28 [3.200]		76.2 [3.000]	83.82 [3.300]	31	2-147730-9		
		78.74 [3.100]		73.66 [2.900]	81.28 [3.200]	30	2-147730-8		
		76.2 [3.000]		71.12 [2.800]	78.74 [3.100]	29	2-147730-7		
		73.66 [2.900]		68.58 [2.700]	76.2 [3.000]	28	2-147730-6		
		71.12 [2.800]		66.04 [2.600]	73.66 [2.900]	27	2-147730-5		
		68.58 [2.700]		63.5 [2.500]	71.12 [2.800]	26	2-147730-4		
88mm		66.04 [2.600]		60.96 [2.400]	68.58 [2.700]	25	2-147730-3		
		63.5 [2.500]		58.42 [2.300]	66.04 [2.600]	24	2-147730-2		
		60.96 [2.400]		55.88 [2.200]	63.5 [2.500]	23	2-147730-1		
		58.42 [2.300]		53.34 [2.100]	60.96 [2.400]	22	2-147730-0		
	72mm		55.88 [2.200]		50.8 [2.000]	58.42 [2.300]	21	1-147730-9	
			53.34 [2.100]		48.26 [1.900]	55.88 [2.200]	20	1-147730-8	
			50.8 [2.000]		45.72 [1.800]	53.34 [2.100]	19	1-147730-7	
			48.26 [1.900]		43.18 [1.700]	50.8 [2.000]	18	1-147730-6	
			45.72 [1.800]		40.64 [1.600]	48.26 [1.900]	17	1-147730-5	
			43.18 [1.700]		38.1 [1.500]	45.72 [1.800]	16	1-147730-4	
			40.64 [1.600]		35.56 [1.400]	43.18 [1.700]	15	1-147730-3	
			38.1 [1.500]		33.02 [1.300]	40.64 [1.600]	14	1-147730-2	
		35.56 [1.400]		30.48 [1.200]	38.1 [1.500]	13	1-147730-1		
		33.02 [1.300]		27.94 [1.100]	35.56 [1.400]	12	1-147730-0		
		30.48 [1.200]		25.4 [1.000]	33.02 [1.300]	11	147730-9		
		27.94 [1.100]		22.86 [.900]	30.48 [1.200]	10	147730-8		
44mm		25.4 [1.000]		20.32 [.800]	27.94 [1.100]	9	147730-7		
		22.86 [.900]		17.78 [.700]	25.4 [1.000]	8	147730-6		
		20.32 [.800]		15.24 [.600]	22.86 [.900]	7	147730-5		
		17.78 [.700]		12.7 [.500]	20.32 [.800]	6	147730-4		
		15.24 [.600]		10.16 [.400]	17.78 [.700]	5	147730-3		
		12.7 [.500]		7.62 [.300]	15.24 [.600]	4	147730-2		
		10.16 [.400]		5.08 [.200]	12.7 [.500]	3	147730-1		

- 1 HOUSING: GLASS FILLED, FLAME RETARDANT POLYESTER, BLACK CONTACTS: PHOSPHOR BRONZE. VACUUM COVER: STAINLESS STEEL.
- 2 CONTACTS: DUPLEX PLATED: 0.25µm[.000010] GOLD IN CONTACT AREA 3.81-7.62µm[.000150-.000300] BRIGHT TIN-LEAD ON LEADS, 1.27µm[.000050] MIN NICKEL UNDERPLATE ALL OVER.
- 3 DIMENSION APPLIES TO HOUSING CAVITY CENTERLINES ONLY.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 5 POINT OF CONTACT DIMENSION.
- 6 MARK PART NUMBER AND DATE CODE IN APPROXIMATE LOCATION SHOWN, EITHER SIDE.
- 7 TOLERANCE IS NON-CUMULATIVE.
- 8 5.2 [.205] MIN TARGET AREA FOR VACUUM PICK-UP COVERS TO BE REMOVED AFTER SOLDERING.
- 9 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 10 NO CENTER HOLD DOWNS
- 11 FOR 2 POS. DATE CODE IS STAMPED OPPOSITE SIDE OF TE LOGO.
- 12 TE LOGO AND CSA LOGO ARE MOLDED INTO HOUSING.
- 13 NO PART NUMBER MARKING REQUIRED ON THIS PART.
- 15 CONTACTS: DUPLEX PLATED: 0.25µm[.000010] GOLD IN CONTACT AREA 3.81-7.62µm[.000150-.000300] MATTE TIN ON LEADS, 1.27µm[.000050] MIN NICKEL UNDERPLATE ALL OVER.
- 16 ROHS 2002/95/EC COMPLIANT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVO: J. OLSON	19JAN01
0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± -
4 PLC ± -	ANGLES ± -	RECT. ASSY., MOD IV, SINGLE ROW, .100 CL, SURFACE MOUNT, VERTICAL, DUAL ENTRY CLOSED ENTRY	108-25026
MATERIAL: 1	FINISH: SEE TABLE	SIZE: A1	CAGE CODE: 00779
		DRAWING NO: 147730	RESTRICTED TO: -
		SCALE: 5:1	SHEET 1 OF 1

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)