


Thermofit[®] Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 202D953-X-08
 Description : Boot, Straight

NOTES

- All dimensions are in $\frac{\text{inches}}{\text{[millimeters]}}$
- Dimensions appearing in table are as follows:
 a - As Supplied
 b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

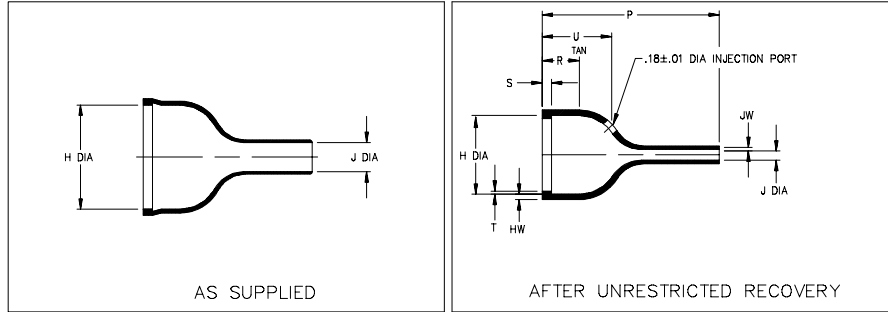

PART NUMBER	H		J		P ±10%	R Ref	S Ref	T Ref	U ±10%	HW ±20%	JW ±20%
	Min	Max	Min	Max							
202D953-X-08	a 1.35 [34,2]	b 1.02 [26,0]	a .38 [9,6]	b .12 [3,1]	b 1.97 [50,0]	b .48 [12,2]	b .12 [3,0]	b .04 [1,0]	b .90 [20,9]	b .07 [1,8]	b .045 [1,14]

**If this document is printed it becomes uncontrolled.
 Check for the latest revision.**

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : A
 Date : 8/11/94


Part Number : 202D953-X-08
 Description : Boot, Straight

Thermofit[®] Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 202D953-X-08
 Description : Boot, Straight

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-25	Elastomer, Fluid Resistant	RT-1325	N/A		

ORDERING INFORMATION

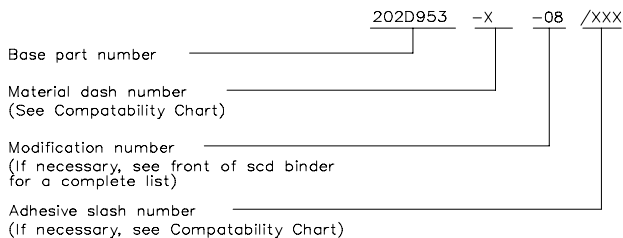

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR
 NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : A
 Date : 8/11/94

Part Number : 202D953-X-08
 Description : Boot, Straight

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)