



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AA	00	C1	REVISED PER ECO-11-004835	11MAR11	RK HMR

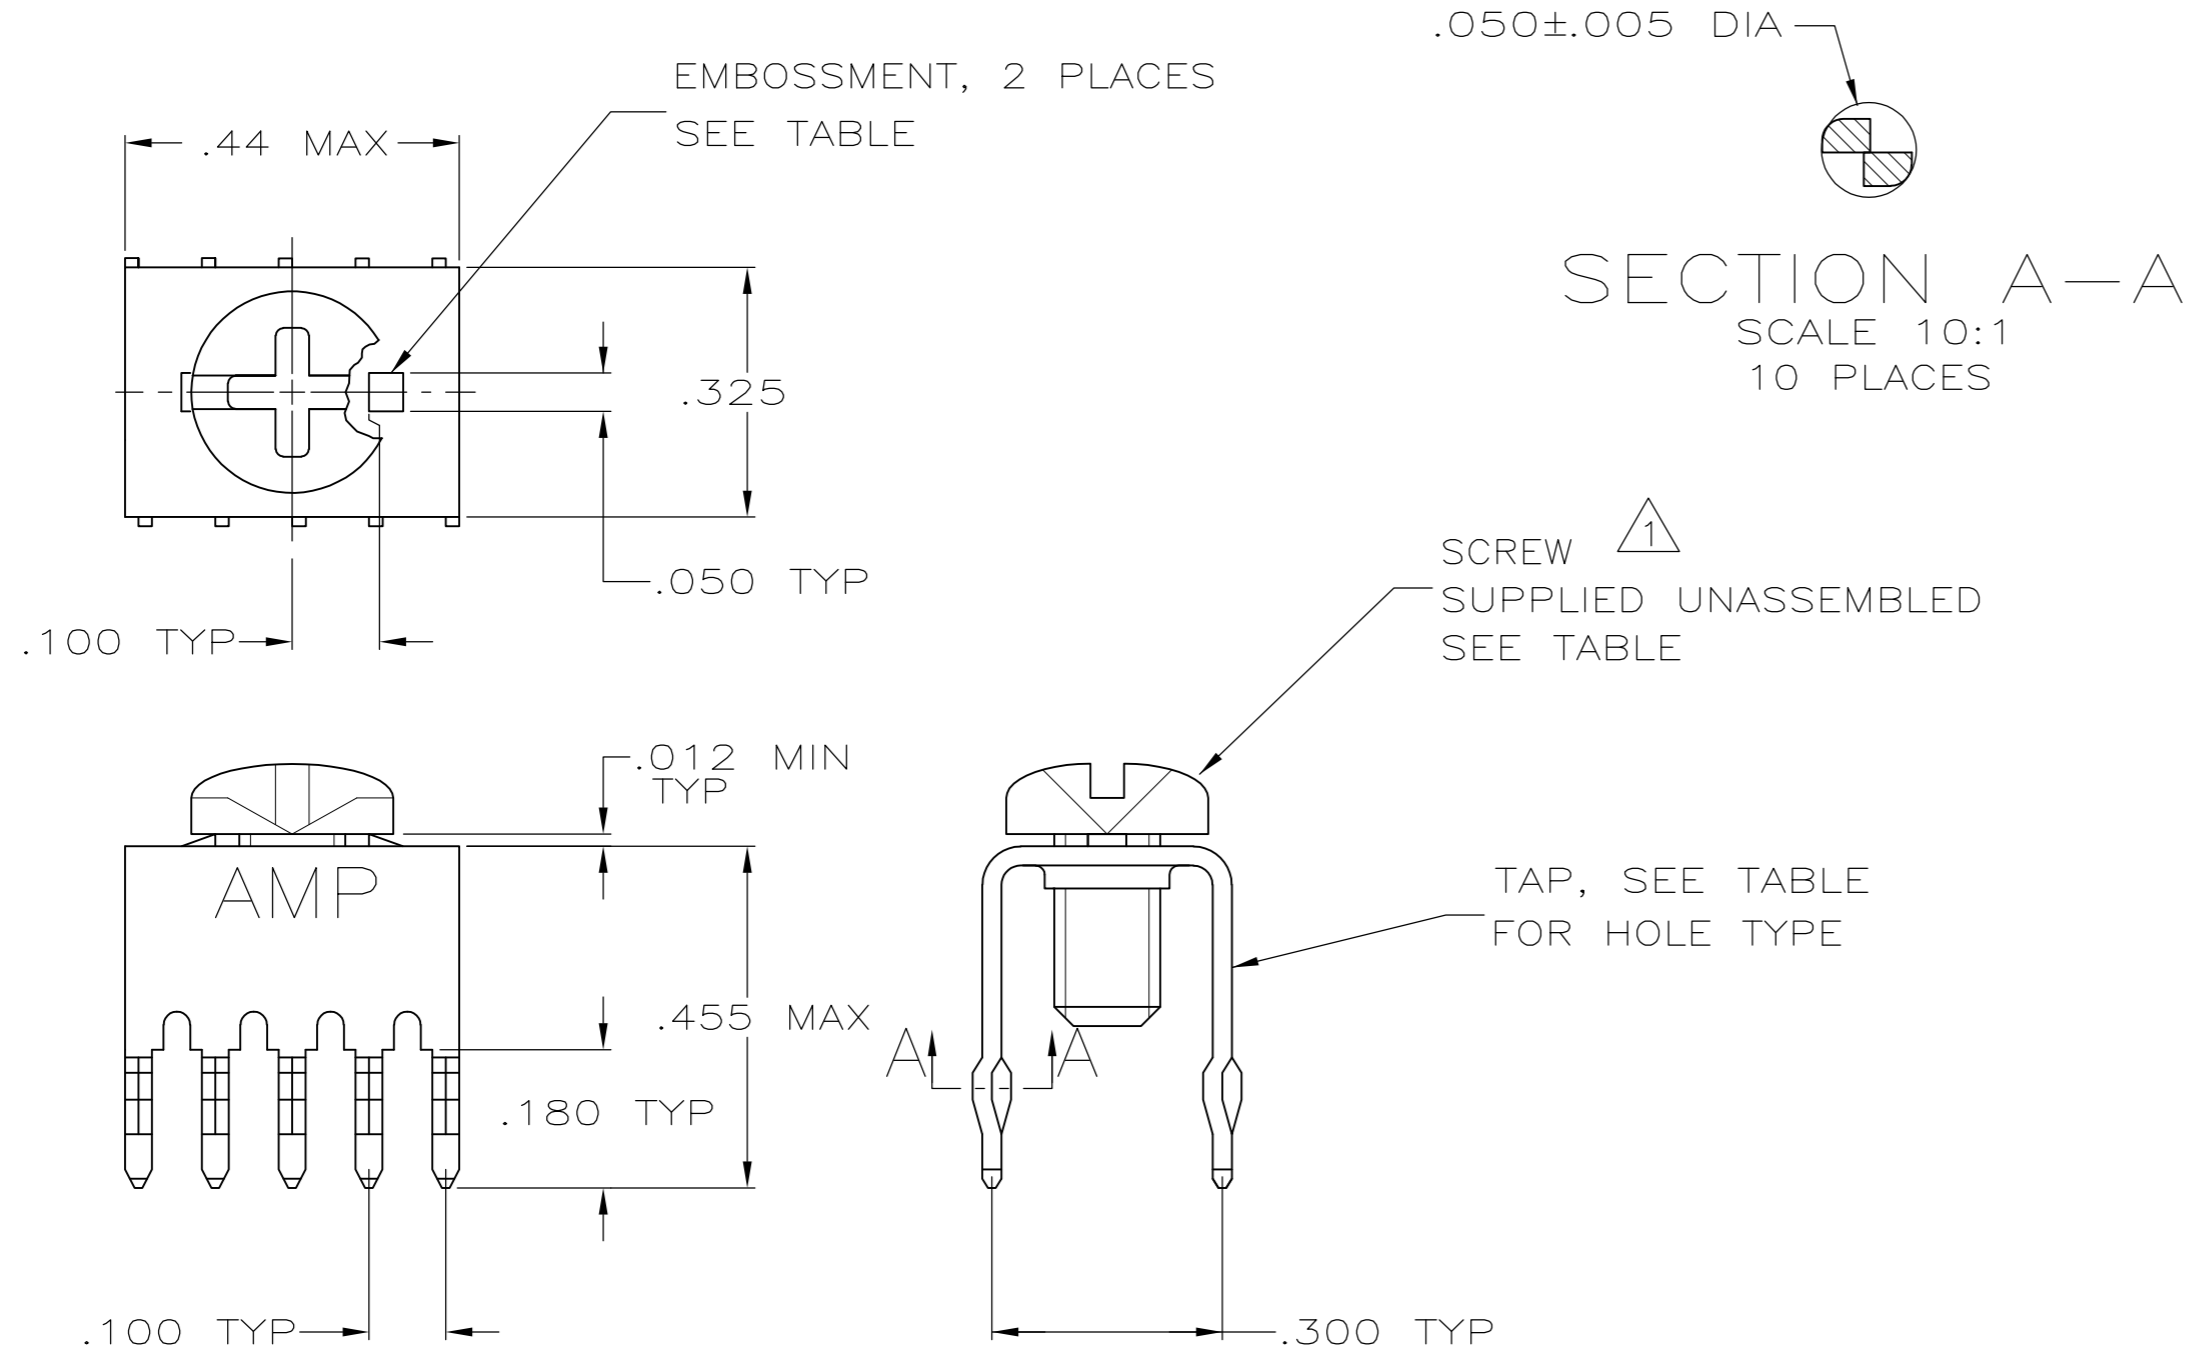

- ¹ TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- ² TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- ³ TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- ⁴ TAP: .000020-.000120 MATTE TIN OVER .000050 NICKEL.
- ⁵ REFERENCE APPLICATION SPECIFICATION 114-11000 FOR DRILL HOLE SIZES AND FINISHES.

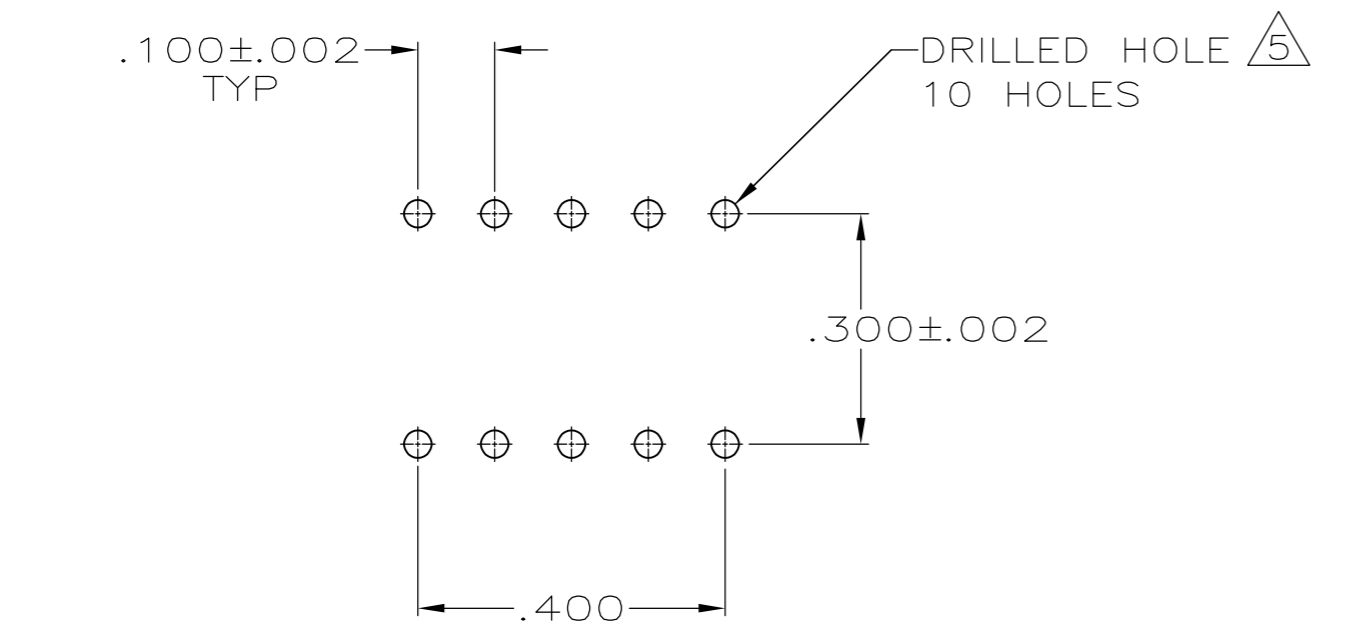

PC BOARD PATTERN

FINISH	HOLE TYPE	SCREW	EMBOSSMENT	PART NUMBER
⁴	³	NO	YES	1-5055558-1
⁴	²	NO	NO	5055558-7
	²	993879-1	YES	5055558-4
	²	NO	YES	5055558-3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J. ALCORTA - DOCK5	05-04-05	 TE Connectivity
CHK	A. FRANTUM	05-04-05	
APVD	S. FLICKINGER	05-04-05	
NAME	TAP, POWER DISTRIBUTION		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	108-11030
INCHES	0 PLC ± -	APPLICATION SPEC	114-11000
	1 PLC ± -	WEIGHT	-
	2 PLC ± -	SIZE	A2
	3 PLC ± .008	CAGE CODE	00779
	4 PLC ± -	DRAWING NO	C=5055558
	ANGLES ± -	RESTRICTED TO	-
MATERIAL	FINISH ⁴	SCALE	4:1
COPPER ALLOY 725.		SHEET	1 of 1
		REV	C1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)