



- LC PORT #1
- LC PORT #2
- LC PORT #3
- LC PORT #4
- LC PORT #5
- LC PORT #6

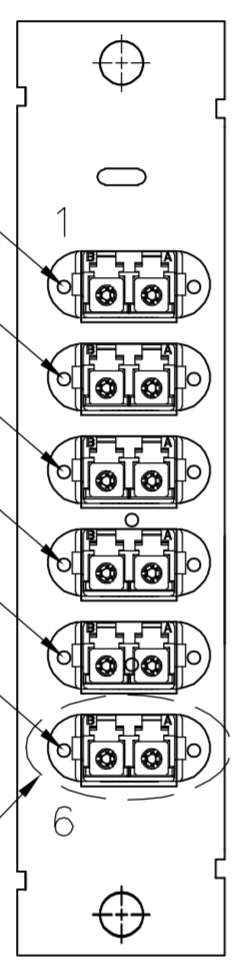


SEE DETAIL C
 FRONT VIEW

RIGHT SIDE VIEW

REAR VIEW

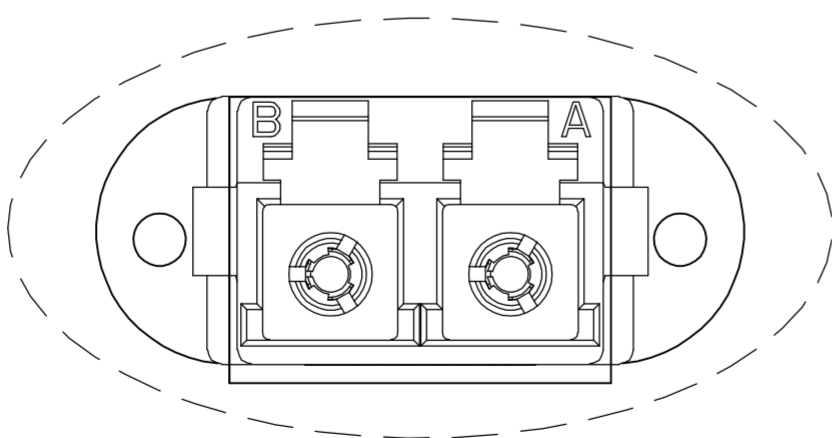

DETAIL C
 TYP. 6 PLC.

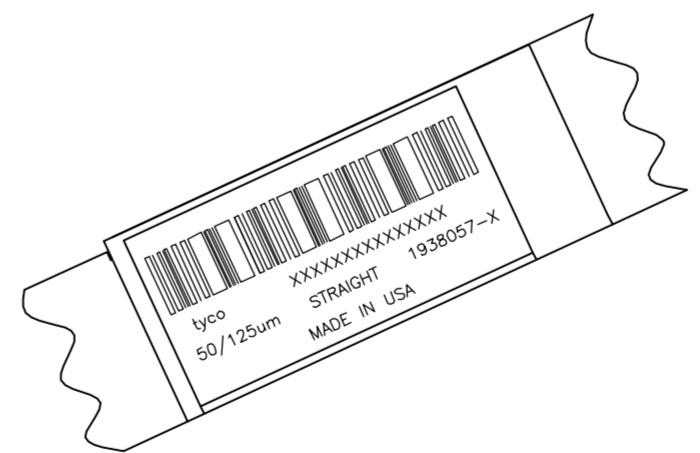

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. FENNEL 16MAR07	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK D. FENNEL 16MAR07	NAME D. FENNEL 16MAR07	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC APPLICATION SPEC		
0 PLC ± -		SIZE A2		
1 PLC ± -		CAGE CODE 00779		
2 PLC ± -		DRAWING NO 1938057		
3 PLC ± -		RESTRICTED TO		
4 PLC ± -		SHEET 1 of 2		
ANGLES ± ± -		REV A		
FINISH		SCALE NTS		
MATERIAL		CUSTOMER DRAWING		

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	17	SEE SHEET 1	-	-	-


1. MAXIMUM CASSETTE ASSEMBLY LOSS: 1.25dB.

2. WHITE MARKING ON MPO TO BE FACING TOWARD TOP OF CONNECTOR MODULE. WHITE MARK INDICATES FIBER 1 SIDE.

3. SEE TRACE LABEL DETAIL.

4. A COPY OF CASSETTE ASSEMBLY LOSS TEST DATA WILL BE PLACED INSIDE OR WITH THE UNIT PACKAGE. CASSETTES WILL BE TESTED AT 1300nm WAVELENGTH.

5. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

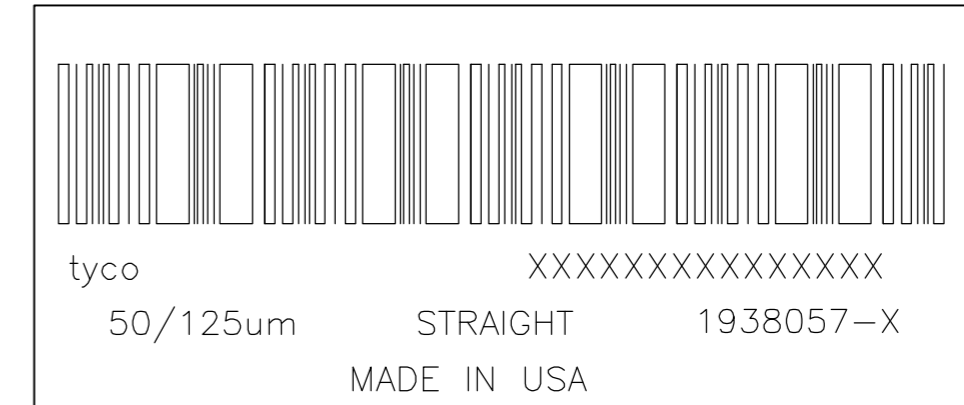

FIBER PATH – STRAIGHT

MPO L1 PORT POSITION NO	LC PORT POSITION NO
1	1B
2	1A
3	2B
4	2A
5	3B
6	3A
7	4B
8	4A
9	5B
10	5A
11	6B
12	6A

AQUA SECURE	AQUA SECURE	1-1938057-1
SLATE SECURE	SLATE SECURE	1-1938057-0
ROSE SECURE	ROSE SECURE	1938057-9
VIOLET SECURE	VIOLET SECURE	1938057-8
BROWN SECURE	BROWN SECURE	1938057-7
ORANGE SECURE	ORANGE SECURE	1938057-6
YELLOW SECURE	YELLOW SECURE	1938057-5
BLUE SECURE	BLUE SECURE	1938057-4
GREEN SECURE	GREEN SECURE	1938057-3
RED SECURE	RED SECURE	1938057-2
BLACK STANDARD	BEIGE STANDARD	1938057-1
MPO COUPLING BUSHING COLOR & TYPE	LC ADAPTER COLOR & TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. FENNELL 08NOV06	tyco Tyco Electronics Corporation	
DIMENSIONS: mm		CHK D. FENNELL 08NOV06	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. FENNELL 08NOV06	NAME CASSETTE, 6 PORT, 50/125um, MPO TO LC, STRAIGHT FIBER PATH	
0 PLC ± -		PRODUCT SPEC	SIZE A2 CAGE CODE 00779 DRAWING NO C=1938057 RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	SCALE NTS SHEET 2 OF 2 REV A	
2 PLC ± -		WEIGHT -		
3 PLC ± -		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
FINISH -				

1938057

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)