

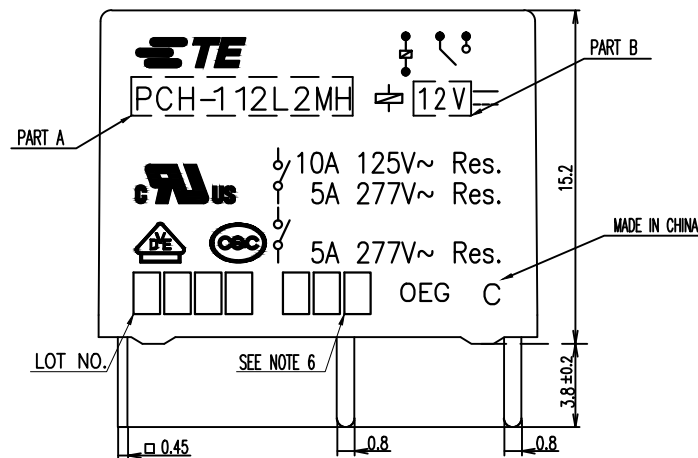


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	E	RELEASE	27-DEC-13	Q.L B.F

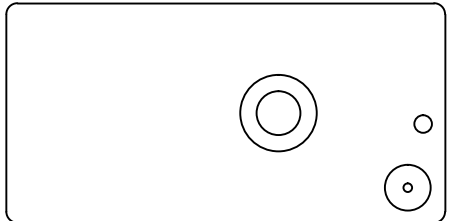

CONNECTION DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (BOTTOM VIEW)






Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

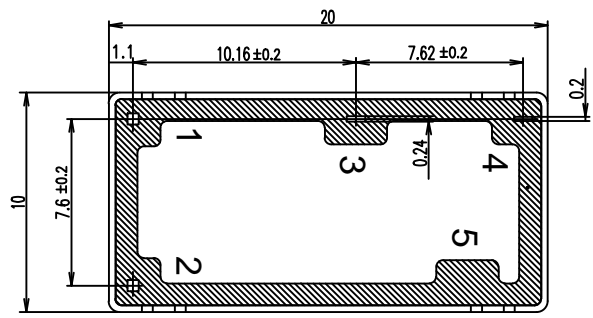

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.SASAKI	
DIMENSIONS: mm		CHK	N.FUNAYAMA	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A.NAGAI	
0 PLC	±	PRODUCT SPEC	-	
1 PLC	±	APPLICATION SPEC	-	
2 PLC	±	WEIGHT	-	
3 PLC	±	CUSTOMER DRAWING	-	
4 PLC	±	SIZE	A3	00779
ANGLES	±	CAGE CODE	C=	
FINISH	-	DRAWING NO	1721214	
		RESTRICTED TO	-	
		SCALE	5:1	SHEET 1 OF 2
		REV	E	



PCH-L2M SPEC,002X

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -- . - .
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	SEE SHEET 1	-	-	-

1721214-6	PCH-124L2M,002X	PCH-124L2M	24V	107-79019(TRAY)	f
1721214-5	PCH-112L2M,002X	PCH-112L2M	12V	107-79019(TRAY)	e
1721214-4	PCH-109L2M,002X	PCH-109L2M	9V	107-79019(TRAY)	d
1721214-3	PCH-106L2M,002X	PCH-106L2M	6V	107-79019(TRAY)	c
1721214-2	PCH-105L2M,002X	PCH-105L2M	5V	107-79019(TRAY)	b
1721214-1	PCH-103L2M,002X	PCH-103L2M	3V	107-79019(TRAY)	a
TE PART NO	DESCRIPTION	PART A	PART B	PACKAGE SPEC	TYPE

RELAY TYPE

NOTES:

- 1. TERMINAL DIMENSIONS BEFORE SOLDER DIP
- 2. LAST SUFFIX
NON : WASHABLE TYPE
- 3. LOT NO. SYSTEM AS FOLLOWING;

□	□	□
WEEK		
YEAR		
- 4. FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH, THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.
- 5. MARKING FROM INK TO LASER.

6. ADD LOT NO. SYSTEM AS FOLLOWING;



- I, DIGITS FOR DAY OF THE WEEK
 1...MONDAY IN THIS WEEK;
 2...TUESDAY IN THIS WEEK;

 7...SUNDAY IN THIS WEEK
- II, DIGITS FOR SHIFT OF THE DAY
 1...DAY SHIFT IN THIS DAY;
 2...NIGHT SHIFT IN THIS DAY;
- III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A,B,....Z

		EPOXY RESIN	SEAL	15	
CLASS E		UEW	MAGNETIC WIRE	14	
	SOLDER DIP	CP WIRE	COIL TERMINAL	13	
		Ag ALLOY	STATIONARY CONTACT	12	
		Ag ALLOY	MOVABLE CONTACT	11	
		Cu ALLOY	HINGE SPRING	10	
	SOLDER DIP	Cu ALLOY	NO TERMINAL	9	
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	8	
UL 94V-0		PA NYLON	CARD	7	
UL 94V-0		PBT	CASE	6	
UL 94HB		PA NYLON	BOBBIN	5	
UL 94V-0		PBT	BASE	4	
		Ni PLATED	STEEL	CORE	3
		CuNi PLATED	STEEL	ARMATURE	2
		CuNi PLATED	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.SASAKI	-
DIMENSIONS: mm		CHK	N.FUNAYAMA	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A.NAGAI	-
		PRODUCT SPEC		
		APPLICATION SPEC		
		WEIGHT		
		MATERIAL		
FINISH				
		SIZE	A3	
		CAGE CODE	00779	
		DRAWING NO	C= 1721214	
		RESTRICTED TO		
CUSTOMER DRAWING		SCALE	5:1	
		SHEET	2 OF 2	
		REV	E	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)