



1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.

2 MATERIAL: HOUSING - POLYPHENYLENE OXIDE, BLACK.  
TERMINALS - PHOS BRONZE PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 TOTAL ON MATING SURFACE, ALL OVER .000050 MIN NICKEL UNDERPLATE.

3 ALL DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.

4. WIRE SIZE: 22 AWG SOLID OR 22 AWG STRANDED COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF .036 IS ACCEPTABLE FOR MOST APPLICATIONS.

5 CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

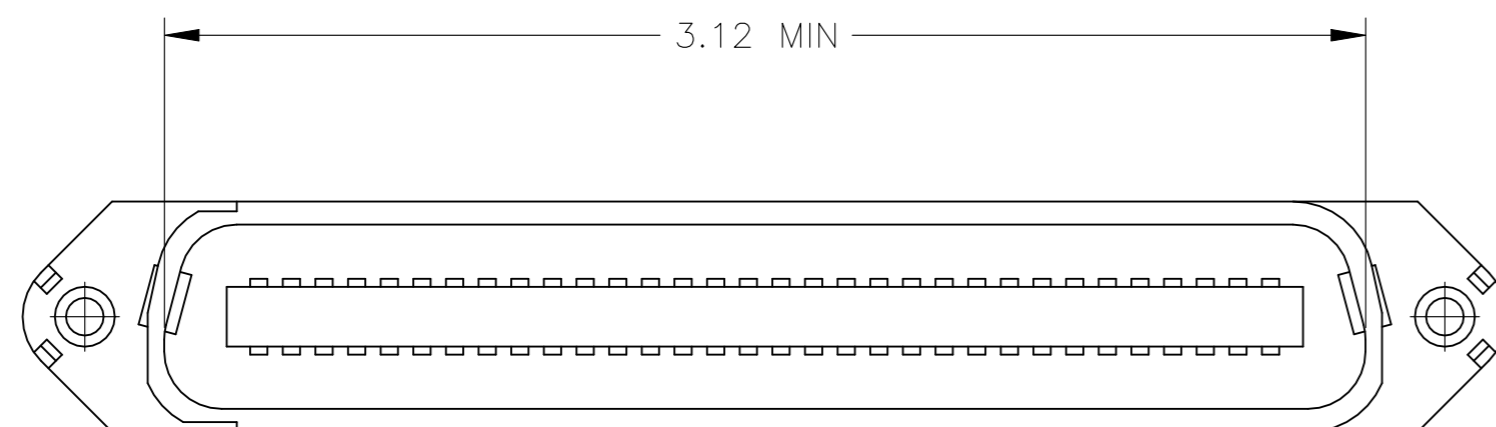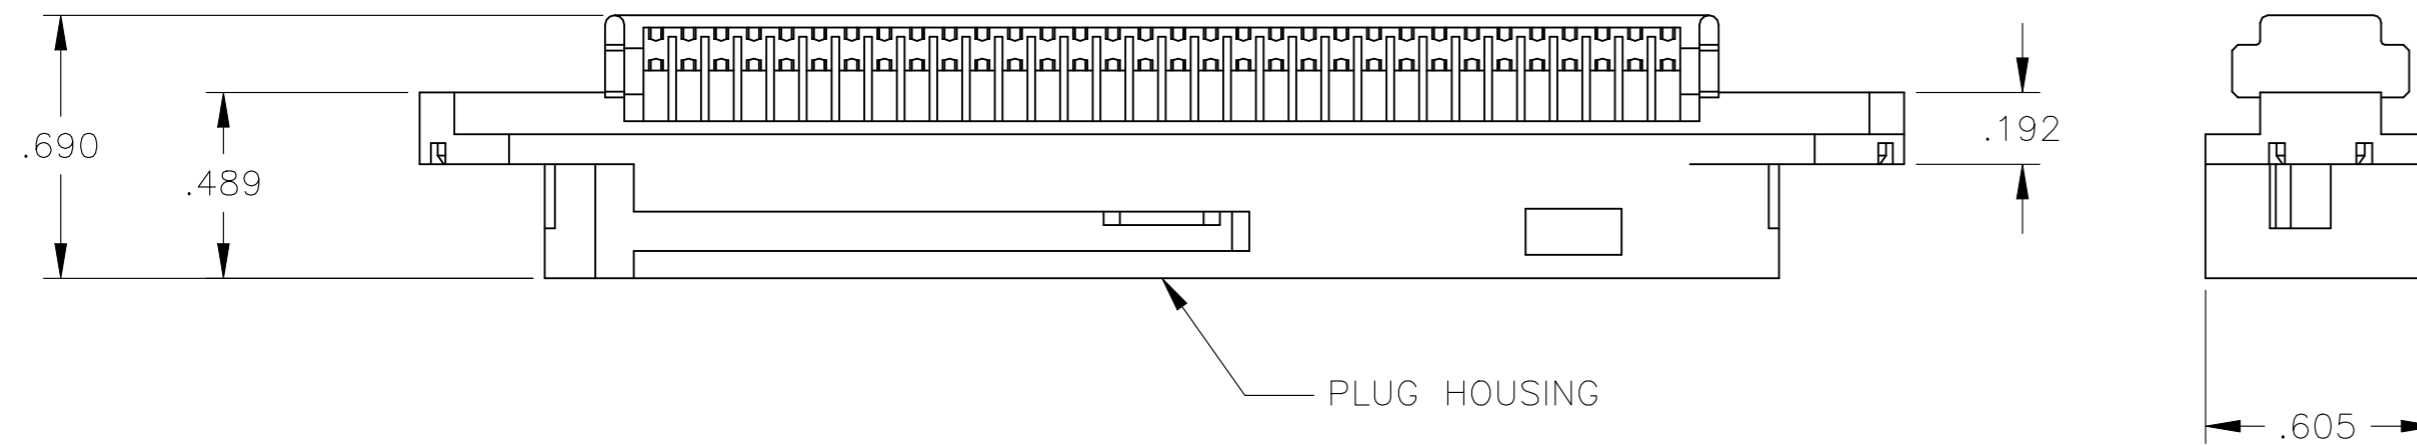

# OBSOLETE

556409-1  
PART NUMBER

DWN	14FEB1989	MATERIAL	2	HEAT TREAT	-
J.C. SPIMBLE					
CHK	15FEB1989				
B. FOX					
APVD	15FEB1989				
J. TRAMMEL		TE Connectivity			
NAME					
PLUG ASSEMBLY, 64 POS, F SLOT, SCREW LOCK, CHAMP-LOK					
SCALE	2:1	SIZE	A2	DRAWING NO	556409
				SHEET	1 OF 1
				REV	A1

REV	DESCRIPTION	DATE	DWN	APVD
A1	REVISED PER ECO-21-002981	03MAR2021	SH	SZ
A	REDRAWN, REV PER ECO-09-020146	02OCT2009	CJV	PAR
P	LTR	REVISION RECORD		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
ANGLES ±	-
SURFACE TEXTURE	√

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)